

**EVALUATION OF RESISTANCE TRAINING EQUIPMENT
USING THREE DIMENSIONAL MUSCULOSKELETAL
MODELLING FOCUSING ON THE BIOMECHANICAL AND
ANTHROPOMETRIC CONSIDERATIONS OF THE END-
USER**

by

Kim Nolte

Submitted in partial fulfilment of the requirement for the degree

DOCTOR PHILOSOPHIAE

In the

**FACULTY OF HUMANITIES
(Department of Biokinetics, Sport and Leisure Sciences)**

University of Pretoria

Promoter: Prof. PE Krüger

Pretoria

September 2011

ACKNOWLEDGEMENTS

I would like to express my sincere thanks and gratitude to the following persons and institutions for their guidance, without who's assistance, this study would not have been possible.

Prof. PE Krüger (Department Biokinetics, Sport and Leisure Sciences, University of Pretoria): Who acted as my promoter, for his invaluable guidance and support.

Prof. S Els (Department of Mechanical and Aeronautical Engineering, University of Pretoria): Who acted as my co-promoter, for his guidance and wise input throughout my studies.

ERGONOMICS TECHNOLOGIES (ERGOTECH): For their willingness to allow me to use their facilities and equipment for the modelling process as well as their assistance with my training.

Dr. M Thoresson (ESTEQ Engineering): For his time, guidance and support regarding the MSC software system Adams and its plug-in Lifemodeler™.

Heinrich Nolte: To my very special husband, for his never failing encouragement, support and invaluable assistance throughout my studies. It has been an incredible journey completing our Doctoral studies together.

Yvonne De 'Ath: My mother's unconditional love and support in all my endeavours.

ABSTRACT

TITLE	Evaluation of resistance training equipment using three dimensional musculoskeletal modelling focusing on the biomechanical and anthropometric considerations of the end-user
CANDIDATE	Kim Nolte
PROMOTER	Prof PE Krüger
CO-PROMOTER	Prof PS Els
DEPARTMENT	Biokinetics, Sports and Leisure Sciences University of Pretoria
DEGREE	Doctor Philosophiae

The main goal of this study was to evaluate whether three dimensional musculoskeletal modelling (3D) is effective in assessing the safety and efficacy of resistance training equipment. The focus of the evaluation was on the biomechanical and anthropometric considerations of the end-user. 3D musculoskeletal modelling was used to evaluate four pieces of resistance training equipment, namely the seated biceps curl, abdominal crunch, seated row and chest press. Three anthropometric cases were created; these represented a traditional 5th percentile female as well as a 50th and 95th percentile male based on body mass index (BMI). Resistance on the training machines was set at fifty percent of the functional strength one repetition maximum (1RM), for each anthropometric case and piece of exercise equipment two repetitions were performed except for the abdominal crunch model during which four repetitions were simulated. Each piece of equipment presented unique challenges. In three of the four studies (seated biceps curl, seated row and chest press) the default model created by the modelling software was not adequate to solve the forward dynamics simulations and thus adjustments had to be made to the default model

in order to complete the modelling process. 3D musculoskeletal modelling by means of LifeModeler™ software was able to identify some potential risk for musculoskeletal injury as well as highlight the discrepancies between the anthropometric cases, specifically the accommodation of the 5th percentile female and the machines' engineered adjustability. 3D musculoskeletal modelling has the potential to indicate shortcomings in resistance training equipment design. Therefore it appears as if 3D musculoskeletal modelling can be used to evaluate resistance training equipment design however the limitations as indicated by this study must be taken into consideration especially when using default models.

KEY WORDS: Resistance training equipment, modelling, LifeModeler™, inverse dynamics, forward dynamics, biomechanics, anthropometric, musculoskeletal injury, safety, efficacy

OPSOMMING

TITEL	Evaluasie van weerstands oefenapparaat deur middel van driedimensionele muskuloskeletale modellering deur te fokus op die biomeganiese en antropometriese oorwegings van die end-gebruiker.
KANDIDAAT	Kim Nolte
PROMOTOR MEDEPROMOTOR	Prof PE Krüger Prof PS Els
DEPARTEMENT	Biokinetika, Sport- en Vryetydswetenskappe Universiteit van Pretoria
GRAAD	Doctor Philosophiae

Die doel van die studie was om die effektiwiteit van driedimensionele (3D) muskuloskeletale modellering te evalueer in terme van die tegniek se vermoë om die veiligheid en doeltreffendheid van weerstands oefenapparaat te evalueer. Die fokus van die evaluasie was op die biomeganiese en antropometriese oorwegings van die end-gebruiker. 3D muskuloskeletale modellering was gebruik in die evaluasie van vier weerstands oefenapparate genaamd die sittende biceps krul, abdominale krul, sittende roei en sittende borsstoot. Drie antropometriese gevalle is geskep, die het 'n tradisionele 5^e persentiel vrou, sowel as 'n 50^{ste} en 95^{ste} persentiel man voorgestel en was gebasseer op liggaamsmassa indeks waardes. Die eksterne weerstand van die apparaat was bepaal teen vyftig persent van die funksionele krag een-repetisie- maksimum vir elk van die antropometriese gevalle en twee repetisies is uitgevoer behalwe vir die abdominale krul waartydens vier repetisies gesimuleer is. Elke apparaat het unieke uitdagings gestel. In drie van die vier studies (sittende biceps krul, sittende roei en sittende borsstoot) was die standaard model van die sagteware

onvoldoende om die voorwaards dinamiese simulاسie op te los en moes aanpassings aan die modelle gemaak word vir suksesvolle simulاسies. Die modellerings proses met die Lifemodeler™ sagteware kon potensiële risiko vir muskuloskeletale besering sowel as verskille tussen die verskeie antropometriese gevalle uitwys. Dit was veral opvallend vir die akkomodاسie van die 5^e persentiel vrou asook betreffende die apparaat se vervaardigde verstelbaarheid. 3D muskuloskeletale modellering beskik oor die vermoë om voorstelle vir verbetering in die ontwerp van weerstands oefenapparaat uit te wys. Dit blyk dus dat 3D muskuloskeletale modellering beslis gebruik kan word vir die evaluاسie van weerstands oefenapparaat ontwerp, die beperkings van die studie moet egter in gedagte gehou word, veral wanneer standaard modelle gebruik word.

SLEUTELTERME: Weerstandsoefening apparaat, modellering, Lifemodeler™, omgekeerde dinamika, voorwaardse dinamika, biomeganiese, antropometriese, muskuloskeletale besering, veiligheid, doeltreffendheid

TABLE OF CONTENTS

CHAPTER 1: GENERAL INTRODUCTION

1.1	THREE DIMENSIONAL MUSCULOSKELETAL MODELLING	13
1.2	PROBLEM FORMULATION	14
1.3	GOALS AND OBJECTIVES	15
1.4	HYPOTHESIS	15
1.5	RESEARCH APPROACH	16
1.6	STRUCTURE OF THE THESIS	17
1.7	REFERENCES	19

CHAPTER 2: OVERVIEW (RESISTANCE TRAINING)

2.1	EXERCISE AND EXERCISE EQUIPMENT	22
2.2	RESISTANCE TRAINING	22
2.3	CONCLUSION	42
2.4	REFERENCES	43

CHAPTER 3: THREE DIMENSIONAL MUSCULOSKELETAL MODELLING OF THE SEATED BICEPS CURL RESISTANCE TRAINING EXERCISE FOCUSING ON THE BIOMECHANICAL AND ANTHROPOMETRIC CONSIDERATIONS OF THE END-USER

3.1	ABSTRACT	49
3.2	INTRODUCTION	51
3.3	METHODS	52
3.4	RESULTS	59
3.5	DISCUSSION	65
3.6	CONCLUSION	75
3.7	REFERENCES	76

CHAPTER 4: THREE DIMENSIONAL MUSCULOSKELETAL MODELLING OF THE ABDOMINAL CRUNCH RESISTANCE TRAINING EXERCISE FOCUSING ON THE BIOMECHANICAL AND ANTHROPOMETRIC CONSIDERATIONS OF THE END-USER

4.1	ABSTRACT	82
4.2	INTRODUCTION	84
4.3	METHODS	85
4.4	RESULTS	91
4.5	DISCUSSION	99
4.6	CONCLUSION	106
4.7	REFERENCES	106

CHAPTER 5: THREE DIMENSIONAL MUSCULOSKELETAL MODELLING OF THE SEATED ROW RESISTANCE TRAINING EXERCISE FOCUSING ON THE BIOMECHANICAL AND ANTHROPOMETRIC CONSIDERATIONS OF THE END-USER

5.1	ABSTRACT	111
5.2	INTRODUCTION	113
5.3	METHODS	114
5.4	RESULTS	121
5.5	DISCUSSION	129
5.6	CONCLUSION	134
5.7	REFERENCES	135

CHAPTER 6: THREE DIMENSIONAL MUSCULOSKELETAL MODELLING OF THE CHEST PRESS RESISTANCE TRAINING EXERCISE FOCUSING ON THE BIOMECHANICAL AND ANTHROPOMETRIC CONSIDERATIONS OF THE END-USER

6.1	ABSTRACT	140
6.2	INTRODUCTION	141

6.3	METHODS	143	
6.4	RESULTS	149	
6.5	DISCUSSION	156	
6.6	CONCLUSION	161	
6.7	REFERENCES	162	
CHAPTER 7: SUMMARY, GENERAL CONCLUSIONS AND RECOMMENDATIONS			
7.1	SUMMARY	167	
7.2	GENERAL CONCLUSION	175	
7.3	RECOMMENDATIONS	175	
APPENDIX			
8.1	PUBLICATION	177	

LIST OF FIGURES (Chapters 1 and 2)

Figure 2.1	An example of a seated biceps curl machine	25
Figure 2.2	Plate from the classical period in Greece shows two athletes using halters	26
Figure 2.3	Force (F) and moment arm (FA) of the biceps brachii muscle	29
Figure 2.4	Contraction of myofibril	31
Figure 2.5	Percentage of injuries at each body location for women and men	34
Figure 2.6	Example of LifeModeler™ musculoskeletal human model	36
Figure 2.7	Inverse and forward dynamics	37

LIST OF TABLES (Chapters 1 and 2)

Table 2.1	Data obtained (LifeModeler™)	39
Table 2.2	LifeModeler™ default model muscles	40

LIST OF ABBREVIATIONS (Chapters 1 and 2)

3D	Three dimensional
F	Force
T	Torque
FA	Force Arm / Moment Arm
COTS	Commercially off the shelf
pCSA	Physiological Cross-sectional area
aCSA	Anatomical Cross-sectional area
F_{\max}	Maximum force
M_{stress}	Maximum tissue stress
PID	Proportional-integral-differential
P_{error}	(Target value – current value) / range of motion
D_{error}	First derivative of P_{error}
I_{error}	Time integral of P_{error}

CHAPTER 1

GENERAL INTRODUCTION

1.1 THREE DIMENSIONAL (3D) MUSCULOSKELETAL MODELLING

Biomechanics is the study of motion and its causes in living things. Within the application of sport, exercise and rehabilitation science, biomechanics provides key information on the most effective and safest movement patterns, equipment, and the relevant exercises to improve human movement (Knudson, 2007). Thus, the ultimate goal of exercise and sport biomechanics is performance improvement and a secondary goal is injury prevention (McGinnis, 2005). In biomechanical modelling the human body is treated as a mechanical system of linkages and masses, activated by muscles that span joints (Kroemer *et al.*, 2001).

A computer model of the human musculoskeletal system is a mathematical description of the body in motion compiled into a computer programme (Luttgens *et al.*, 1992). The advancement in computer technology and data processing capability has allowed the improvement of modelling software to a point where dynamic problems can now be simulated and analysed in a digital environment (Zenk *et al.*, 2005; Kim & Martin, 2007; Wagner *et al.*, 2007). Furthermore, computer simulations allow for the exploration of the limitations of human movement systems without endangering human subjects (Luttgens *et al.*, 1992).

Mathematical and computer modelling is suitable for a wide variety of applications such as the design, production and alteration of medical equipment (prostheses, orthopaedic and orthodontic devices) as well as sports and training equipment (Alexander, 2003; Kazlauskiené, 2006). With the capability to simulate musculoskeletal human models interacting with mechanical systems many questions concerning the effects of the resistance training equipment on the body

can be studied. In addition, computer simulation models permit the study of the complex interactions between biomechanical variables (Kenny *et al.*, 2005).

From a biomechanics perspective, the design of some resistance training machines or exercise equipment are more sound than others, in that they can be adjusted to accommodate different limb lengths and user sizes. The quality of machines can vary widely (Beachle & Earle, 2008).

Design of exercise equipment is a complex task and needs to consider a series of biomechanical, anthropometric and ergonomics factors. Furthermore, there is inevitably increased loading on certain parts of the body during exercise due to the repetitive nature of exercises. Improvement in equipment design could reduce these hazards and offset such a negative effect on the body (Dabnichki, 1998).

1.2 PROBLEM FORMULATION

The public's interest in becoming physically fit has created a global multi-million dollar industry that does not always promote items or services that are safe, effective or necessary (Prentice, 2003). When considering the results of scientific, popular and patent database searches it is evident that very few of the commercially off the shelf (COTS) pieces of exercise equipment are subjected to any formal scientific testing and evaluation in order to ensure equipment safety and efficacy.

Thus, the motivation for this study originates from a concern for the quality and apparent lack of scientific data that supports exercise equipment evaluation, design and specification. Currently, there is no standard biomechanical evaluation protocol for exercise equipment and more specifically resistance training equipment. Therefore, a need exists to develop and implement basic biomechanical evaluation protocols for exercise equipment. As a result the safety

of the exerciser will be maximised and the efficacy of the exercise will also be enhanced.

1.3 GOALS AND OBJECTIVES

1.3.1 Goal

The goal of this study is to evaluate whether 3D musculoskeletal modelling is effective in assessing the safety and efficacy of resistance training equipment. The focus of the evaluation is on the biomechanical and anthropometric considerations of the end-user.

1.3.2 Objectives

The study aims to achieve the goal through its objectives, which are:

- To develop an evaluation protocol through computer modelling for resistance training equipment. The protocol will include:
 - anthropometric evaluation,
 - biomechanical evaluation,
- To implement the evaluation protocol on four pieces of resistance training equipment.
- Identify potential risk for musculoskeletal injury.
- Make recommendations on how the equipment could be improved with regards to design in order to maximise safety and exercise efficacy.
- Make recommendations regarding limitations of the evaluation protocol. Evaluate if the protocol is sensitive enough to indicate injury risk and/ or limitations in equipment design.

1.4 HYPOTHESIS

A hypothesis is a statement in which an assumed relationship or difference between two or more phenomena or variables is postulated (Mouton & Marais, 1990). In the light of the goal of this study, the following research hypothesis is formulated:

3D musculoskeletal modelling focusing on biomechanical and anthropometric considerations of the end-user is effective in evaluating the overall design of resistance training equipment.

Sub-hypotheses are formulated from the main hypothesis:

- Meaningful recommendations can be made regarding improving the safety of exercise equipment; and
- Meaningful recommendations can be made regarding improving the efficacy of training on exercise equipment.
- Poor accommodation of the user by exercise equipment will put the exerciser at increased risk for injury.

1.5 RESEARCH APPROACH

The approach of this research is that of an evaluation study, combining digital parametric modelling with an analytical research focus.

1.5.1 Type of Research

The type of research that the researcher will make use of will be applied research. De Vos *et al.* (1998: 20) define applied research as "*...geared to the development of knowledge and technology with a view to achieving meaningful intervention.*" This research can be classified as applied research because the researcher will gain knowledge and insight with regards to the various pieces of exercise equipment and use the information to make suggestions on how to improve the design of the exercise equipment.

Descriptive research is a study of status that is widely used in education and the behavioural sciences. Its value is based on the premise that problems can be solved and practices improved through objective and thorough observation, analysis, and description (Thomas & Nelson, 1990). Several techniques or methods of problem solving fall into the category of descriptive research. In addition, there are various forms of descriptive studies (Thomas & Nelson, 1990;

Babbie & Mouton, 2001). This study will consist of an evaluative case study due to the fact that this study will involve the collection of data, and the analysis and reporting of results.

Data collection will primarily take place by means of digital parametric modelling and therefore quantitative research methods will be used. Quantitative research is a type of conclusive research involving large representative samples and reasonably structured data collection procedures. A quantitative study requires that a large amount of data is collected and then expressed in numbers (Struwig & Stead, 2001).

1.6 STRUCTURE OF THE THESIS

Herewith follows a detailed description of the initial and subsequent chapters of the thesis:

Chapter 1: General introduction, briefly describes biomechanics modelling, specifically computer modelling of the human musculoskeletal system. This chapter also discusses the important role that this type of modelling can play in ensuring the efficacy and safety of exercise equipment. Further it provides the problem formulation, goals, hypotheses and research approach of the study.

Chapter 2: Overview (Resistance training), reports on resistance training and resistance training equipment (history, biomechanics, available equipment, injuries and equipment design).

Chapters 3 - 6: Implementation of 3D musculoskeletal modelling with the focus on the biomechanical and anthropometric considerations of the end-user on four pieces of resistance training equipment,

- Seated biceps curl (Chapter 3)

This study presents the musculoskeletal modelling of three anthropometric cases while exercising on a commercially available seated biceps curl

resistance training machine. The biceps curl exercise is a commonly used, predominantly single joint open-kinetic-exercise used to isolate the biceps muscles. A 3D musculoskeletal full body model was created using LifeModeler™ software and incorporated into a multibody dynamics model of the seated biceps curl resistance training machine modelled in MSC ADAMS.

- Abdominal crunch (Chapter 4)

This study presents the musculoskeletal modelling of three anthropometric cases while exercising on a commercially available abdominal crunch resistance training machine. The abdominal crunch resistance training exercise is one of many available exercises, devices or equipment available to strengthen the muscles of the abdominal region such as the Rectus abdominis and Oblique (internal and external) muscles. A 3D musculoskeletal full body model was created using LifeModeler™ software and incorporated into a multibody dynamics model of the abdominal crunch resistance training machine modelled in MSC ADAMS.

- Seated row (Chapter 5)

This study presents the musculoskeletal modelling of three anthropometric cases while exercising on a commercially available seated row resistance training machine. The seated row resistance training exercise is an exercise commonly used to strengthen the musculature of the upper back. A 3D musculoskeletal full body model was created using LifeModeler™ software and incorporated into a multibody dynamics model of the seated row resistance training machine modelled in MSC ADAMS.

- Chest press (Chapter 6)

This study presents the musculoskeletal modelling of three anthropometric cases while exercising on a commercially available open-kinetic chain chest press resistance training machine. The chest press resistance exercise is a popular exercise used to primarily strengthen the musculature of the chest. A

3D musculoskeletal full body model was created using LifeModeler™ software and incorporated into a multibody dynamics model of the chest press resistance training machine modelled in MSC ADAMS.

Chapter 7: Summary, general conclusions and recommendations, provide a summary, conclusions on the interpretations of the findings, and indications for further research.

1.7 REFERENCES

Alexander, R. McN. (2003). Modelling approaches in biomechanics. *Philosophical Transactions of the Royal Society*, **358**, 1429 – 1435.

Babbie, E. & Mouton, J. (2001). *The practice of social research*. Cape Town: University Press.

Beachle, T.R. & Earle, R.W. (2008). *Essentials of strength training and conditioning*. Champaign: Human Kinetics.

Dabnichki, P. (1998). Biomechanical testing and sport equipment design. *Sports Engineering*, **1**, 93 – 105.

De Vos, A.S., Schurink, E.M. & Strydom, H. (1998). The nature of research in the caring professions. In De Vos, A.S. (Ed) *Research at grass roots: A primer for the caring professions*. Pretoria: J.L. van Schaik Pub.

Kazlauskiené, K. (2006). *Design and research of biomechanical models of human with joint replacements*, Unpublished Doctoral Thesis, Kaunas University of Technology.

Kenny, I.C., Wallace, E.S., Brown, D. & Otto, S.R. (2005). *Validation of a full-body computer simulation of the golf drive for clubs of differing length*. University of Ulster: R & A Limited.

Kim, H. & Martin, B.J. (2007). Estimation of body links transfer functions in vehicle vibration environment. *Proceedings of the 2007 digital human modelling for design and engineering conference*. Seattle.

Knudson, D. (2007). *Fundamentals of biomechanics (2nd Ed.)*. New York: Springer.

Kroemer, K., Kroemer, H. & Kroemer-Elbert, K. (2001). *Ergonomics. How to design for ease and efficiency (2nd Ed)*. New Jersey: Prentice Hall.

Luttgens, K., Deutsche, H. & Hamilton, N. (1992). *Kinesiology: Scientific basis of human motion (8th Ed.)*. Dubuque: Brown and Benchmark.

McGinnis, P.M. (2005). *Biomechanics of sport and exercise (2nd Ed)*. Champaign: Human Kinetics.

Mouton, J.M. & Marais, H.C. (1990). *Basic concepts in the methodology of the social sciences (1st Ed.)*. South Africa: Human Sciences Research Council.

Prentice, W.E. (2003). *Fitness and wellness for life (7th Ed)*. Missouri: McGraw-Hill.

Struwig, F.W. & Stead, G.B. (2001). *Planning, designing and reporting research*. Pearson Education. South Africa.

Thomas, J.R. & Nelson, J.K. (1990). *Research methods in physical activity (2nd Ed.)*. Champaign. Human Kinetics Books.

Wagner, D., Rasmussen, J. & Reed, M. (2007). Assessing the importance of motion dynamics for ergonomic analysis of annual materials handling tasks using the AnyBody modelling system. *Proceedings of the 2007 digital human modelling for design and engineering conference*. Seattle.

Zenk, R., Franz, M. & Bubb, H. 2005. Spine load in the context of automotive seating. *Proceedings of the 2007 digital human modelling for design and engineering conference*. Seattle.

CHAPTER 2

OVERVIEW: RESISTANCE TRAINING

2.1 EXERCISE AND EXERCISE EQUIPMENT

The general public's growing awareness of the importance of exercise and wellness has led to an exercise-fitness revolution. Enthusiasm for exercise and fitness is at unprecedented levels with millions of people spending countless hours and millions of Rands on sport and exercise (Prentice, 2003). Increased mechanization and the incidence of hypokinetic diseases are two important factors that have contributed to the emphasis on fitness. With increased mechanization, many tasks that once required physical work and considerable amount of time can now be accomplished very quickly by pushing a button or setting a dial (Hockey, 1996).

Consequently the exercise equipment manufacturing industry has rapidly expanded over the past few years largely due to the amplified eagerness for exercise and fitness and thus equipment demand. Not only has sales of conventional exercise equipment grown enormously but there has also been an escalation in the number of new exercise equipment being designed and marketed. According to Beachle and Earle (2008) the machine age is upon us, and we have a wide variety of exercise devices to choose from, depending on our likes and dislikes. The two primary categories of exercise training equipment, include cardiorespiratory and resistance training equipment.

2.2 RESISTANCE TRAINING

2.2.1 Definition

Resistance training refers to a method of conditioning designed to overload the musculoskeletal system, leading to accelerated enhancement of muscle strength (Fleck & Kraemer, 1997).

The term resistance training encompasses a wide range of resistive loads and a wide variety of training modalities, including, free weights (barbells and dumbbells), weight machines, elastic tubing, medicine balls, stability balls, and body weight (Howley, 2007). Resistance training should be distinguished from the competitive sports of weightlifting, powerlifting and bodybuilding (Vaughn, 1989; Howley, 2007). Competitive weightlifting is primarily encompassed by two distinct sports (1) powerlifting, which includes the squat, bench press and deadlift movements; and (2) weightlifting which includes the overhead snatch and clean-and jerk lifts which are contested in the Olympic Games (Vaughn, 1989; Chui *et al.*, 2008).

2.2.2 Resistance training equipment

Resistance training equipment can be divided into free weights (barbells and dumbbells), machines (plate loaded, weight stack and isokinetic) or other equipment (elastic tubing, medicine balls, etc.).

A virtual cornucopia of resistance training machines are found in today's market (Beachle & Earle, 2008). Weight training machines are designed to train all the major muscle groups and can be found in most fitness centres (Howley, 2007). They are generally more expensive than free weights and often limit the user to single-joint movements in fixed planes of motions. They do not require the proprioception, balance, and coordination required by free weights, but allows the user to isolate some areas of the body more easily. Many devices utilise a weight stack connected to a lever by chains or cables. Less expensive models require weight plates to be added to provide resistance (Beachle & Earle, 2008).

Although many different types of resistance training machines are currently available this study focuses on machines that use a movable external resistance such as a weight stack. In general these machines are somewhat like free weights in that the external resistance is constant (Figure 2.1).

Many machines alter the resistance encountered by the muscles with a system of cams, levers, or pulleys, resulting in a variable-resistance system. Some manufacturers attempt to increase the resistance during a range of motion in an attempt to mimic the human strength curves of various joints or physical movements. Strength curves are variable, however, and in some instances the strength curves of the machines are not identical with those of the human body (Maud & Foster, 2006).

Choosing an appropriate training method can make a considerable difference in the outcome of the resistance training programme. It is also probable that the choice of training mode (type of equipment) can influence adaptations to a training programme (Stone *et al.*, 2000). Recently emphasis has been placed on “functional” resistance training. Such training is supposed to replicate the body’s natural movements and therefore the user could gain more benefits because of the influence on activities of daily living as well as sporting performance. In addition, isolateral training, allows the user to move both limbs at the same time, one at a time, alternating, or with different weights for each (Life Fitness, 2007).

Simultaneous with the growth in popularity of resistance training among athletes and the general public, there has been growth in companies producing resistance training equipment. One in particular made a dramatic impact: Nautilus. The Nautilus equipment design and marketing strategy created a different image of resistance training. The attractive and sophisticated machines placed in clean, well lit surroundings were a far cry from the rusty barbells and dumbbells typically found in the less-than-aesthetic surroundings of traditional weight rooms. These changes, along with others by competing equipment companies, made resistance training not only an acceptable activity, but a trend-setting one (Beachle & Groves, 1992).

Today, in South Africa the primary suppliers of resistance training equipment are Technogym and Fitness World.

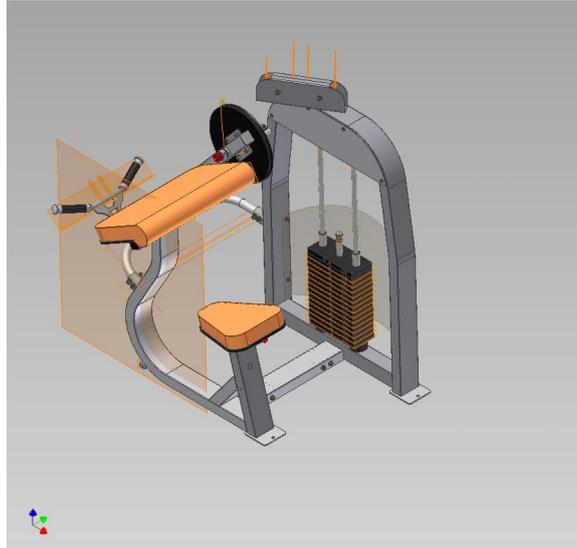


Figure 2.1: Example of a seated biceps curl machine

2.2.3 History of resistance training

Texts regarding resistance training date back to antiquity. Perhaps the earliest record in existence of any form of resistance exercise is a drawing on the wall of a funerary chapel in Beni-Hassan in Egypt. This drawing, done approximately 4500 years ago depicts three figures in various postures of raising overhead what appear to be heavy bags. The bags are lifted in what would now be termed a one-handed swing. Another example of early resistance training is that of athletes using halteres for resistance training and broad jump during the classical period in Greece, halteres being the ancestors of our modern dumbbells (Figure 2.2) (Pearl & Moran, 1986).

Although demonstrations of strength have captured the interest and imagination of people as far back as ancient times, the merits of activities designed to develop strength have not always been well understood or appreciated. For many years it was believed that training with weights provided few if any benefits and, in fact, would result in poor levels of flexibility and impairs neuromuscular coordination. A special concern was that training with weights would result in tremendous increases in muscular size. This was a primary concern among

women, many of whom had been led to believe that having a strong-looking physique or being strong, was not feminine. These myths kept many from enjoying the benefits of weight training. It was not until the 1930s, when two physical therapists, DeLorme and Wadkins, reported successful results using weight training in the rehabilitation of arm and leg injuries of soldiers, that the “renaissance” in attitude about weight training began (Beachle & Groves, 1992).

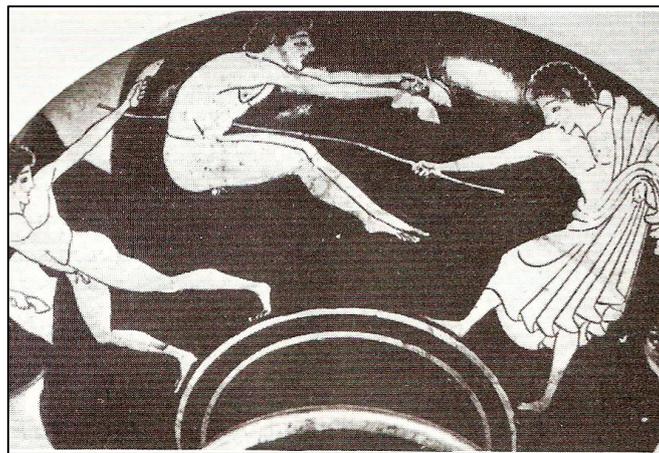


Figure 2.2: Drawing on a plate from the classical period in Greece shows two athletes using halteres, the ancestors of our modern dumbbells. Halteres were used for various standard resistance exercises and broad jumping (Pearl & Moran, 1986).

2.2.4 The future of resistance training

A comprehensive exercise programme should include resistance training, which has its own unique advantages and is recommended by national health organizations such as the American College of Sports Medicine (Kang, 2008). Although the primary outcome of resistance training is improved strength and muscular endurance, a number of health benefits are also derived from this form of exercise. Resistance exercise builds bone mass, thereby counteracting the loss of bone mineral and risk of fractures through falls as one ages. This form of training also lowers blood pressure in hypertensive individuals, reduces body fat

levels, and may prevent the development of low back syndrome (Heyward, 2006). Furthermore, programmes incorporating strength training as an integral part of physical conditioning have also been shown to improve performance in ergonomic tasks, such as lifting weighted boxes to different heights. These types of observations indicate that resistance training can have a transfer-of-training effect that results in a change in functional ability and capacity (Stone *et al.*, 2000).

The current popularity of resistance training is so extraordinary that only those who were alert to such facts as the growing use of weights for sports, the changing attitudes about strength as an aspect of femininity and the increasing interest in fitness, could have foreseen what has now come to pass (Pearl & Moran, 1986). Traditionally, resistance training was used primarily by adult athletes to enhance sport performance and increase muscle size. Today, resistance training is recognized as a method of enhancing the health and fitness of men and women of all ages and abilities (Howley, 2007). The popularity of resistance training is clearly evidenced by the extensive growth of fitness centres and sales of resistance exercise equipment for home use. The increased popularity of, and participation in body-building competitions worldwide is also indicative of the level of interest in benefits derivable from resistance training (Vaughn, 1989; Lou *et al.*, 2007).

Although new pieces of exercise equipment are continuously being designed and produced the “core” pieces of resistance training equipment such as the chest press and leg extension machines have not changed significantly over the past few years. It does however appear as if the future trends of resistance training equipment will be towards sleeker designs, user friendliness as well as the incorporation of the computer or electronic technology.

2.2.5 Biomechanics of resistance training

Knowledge of musculoskeletal anatomy and biomechanics is important for understanding human movements, including those involved in sports and resistance exercise (Beachle & Earle, 2008). Load carrying is an important aspect of resistance training (Johnson, 2007). Many traditional resistance training exercises revolve around the raising and lowering of weights. The weight is often a combination of an external resistance and a portion of the body (Reiser *et al.*, 2007). Lifting of loads require an initial isometric muscular contraction to overcome inertia followed by a dynamic muscular contraction as the load is moved (Johnson, 2007).

Within this typical paradigm, the external resistance begins a repetition from a rested position and is moved vertical, where it again comes to rest. The external resistance is then lowered under control back to the starting position, where an ensuing repetition may be performed. Thus, begins and ends with zero velocity of the person and any external resistance. The majority of the movement is usually in the vertical direction in order to take advantage of the resistance supplied by the force of gravity. However, because linear motion at the hand, foot, or other contact point is the result of angular motion at the joint or multiple joints in some exercises, there is often accompanying horizontal motion with the vertical motion (Reiser *et al.*, 2007).

Linear motion can be defined as the straight line progression of an object as a whole with all its parts moving the same distance in the same direction at a uniform rate or speed. While angular or rotary motion is typical of levers and occurs when any object acting as a radius moves about a fixed point. Most human body segment motions are angular movements in which the body part moves in an arc about a fixed point. The axial joints of the skeleton act as fixed points for rotary motion in the segment (Hamilton *et al.*, 2009).

Even though the path of motion of the body and external resistance may be consistent from repetition to repetition, several factors exist that will influence the magnitude and direction of the forces required to move the external resistance during the course of the exercise (Reiser *et al.*, 2007). Muscle strength is often defined as the maximum force or tension generated by a muscle or muscle groups (McArdle *et al.*, 1996). Force is any pushing or pulling action that causes movement. The effect produced when a force causes rotation is called torque (T). It is the product of the magnitude of the force (F) and the force arm / moment arm (FA), which is the perpendicular distance from the axis to the direction of the application of that force ($T = F \cdot FA$) (Figure 2.3) (Howley, 2007). There are several biomechanical factors involved in the manifestation of human strength including the force generation properties of the muscles, the anatomical features of the skeletal system (e.g. anthropometric properties, muscle paths) and the underlying neuronal control system (Erdemir *et al.*, 2007).

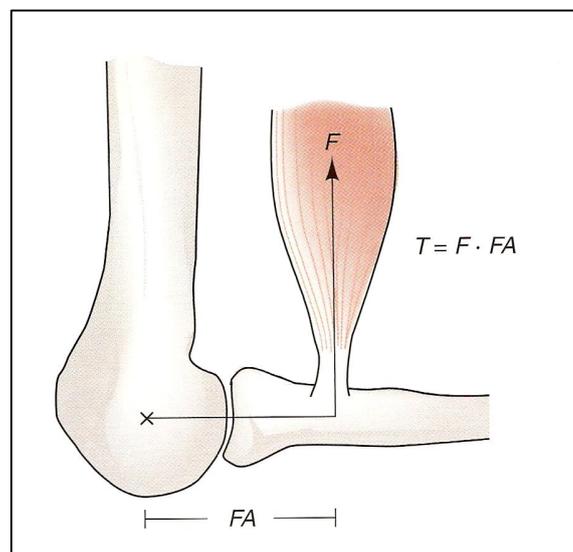


Figure 2.3: Force (F) and moment arm (FA) of the biceps brachii (Howley, 2007).

All else being equal, the force a muscle can exert is related to its cross-sectional area (Beachle & Earle, 2008). In addition, various muscles have different shapes and their fibres may be arranged differently in relation to each other and to the tendons to which they join. The shape and fibre arrangement play a role in the muscle's ability to exert force and the range through which it can effectively exert force on the bones to which it is attached (Hamilton *et al.*, 2009). There is also an optimum length at which a muscle, when stimulated, can exert maximum tension (Luttgens *et al.*, 1992). A muscle can generate most force around its resting length due to the fact that a maximal number of cross-bridge sites are available between the actin and myosin filaments (Figure 2.4) (Beachle & Earle, 2008).

Another important factor to consider is the muscle's angle of pull, the muscle's angle of pull changes with every degree of joint motion and consequently so does the sizes of the horizontal and vertical components. These changes have a direct bearing on the effectiveness of the muscle's pulling force in the bony lever. The larger the angle between 0 degrees and 90 degrees, the greater the vertical component and the less the horizontal component (Luttgens *et al.*, 1992; Hamilton *et al.*, 2009). Neural control affects the maximal force output of a muscle by determining which and how many motor units are involved in a muscle contraction as well as the rate at which the motor units are fired (Beachle & Earle, 2008).

Lastly another consideration in determining the force production of a muscle is the force-velocity relationship. As the speed of a muscular contraction increases, the force it is able to exert decreases. The velocity of contraction is maximal when the load is zero and the load is maximal during eccentric contraction (Luttgens *et al.*, 1992; Hamilton *et al.*, 2009).

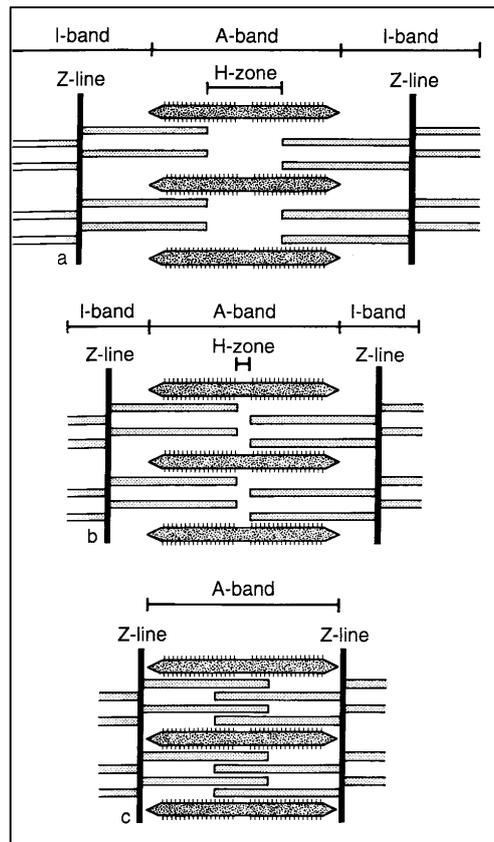


Figure 2.4: Contraction of a myofibril. (a) In stretched muscle, the I-bands and H-zone are elongated, and there is low force potential due to reduced cross-bridge-actin alignment. (b) When muscle contracts (here, partially), the I-bands and H-zone are shortened. There is high force potential due to optimal cross-bridge-actin alignment. (c) With completely contracted muscle, there is low force potential due to reduced cross-bridge-actin alignment (Beachle & Earle, 2008).

Cardiovascular fitness and muscular strength are substantially higher in men compared to women. In men upper body strength is ~ 100% higher and lower body strength is ~ 50% higher (Lynch *et al.*, 1999). However, there are no differences in the “quality” of muscle between sexes and that the observed difference in absolute muscle strength is simply related to the quantity of muscle mass (McArdle, 1996; Johnson, 2007).

2.2.6 Resistance training equipment design

Machines used for resistance training may not actually utilize weights of any kind. For example, air compression cylinders, hydraulic mechanisms, springs, or elastic cables may provide resistance to movement. Of the vast variety of machines currently available for consumer use, however, those most commonly found in public exercise facilities are truly weight machines, that is, their use involves the lifting of weight-plates as part of a weight “stack” (Vaughn, 1989).

From a biomechanics perspective some machines are more sound than others, in that they can be adjusted to accommodate different limb lengths and user sizes. The quality of machines can vary widely (Beachle & Earle, 2008). Equipment design must be regenerative in nature. Designers have not only an obligation to comply with the regulations of appropriate governing bodies but also the responsibility for the safety and comfort of the users. Unfortunately these guidelines mainly address equipment used by various sporting codes with little or no enforceable guidelines for resistance training equipment. Mandatory regulations would enhance the quality of fabrication as well as augmenting the enjoyment of users, secure in the knowledge that real injury risks in the sport or recreation of their choice have thereby been reduced (Reilly & Lees, 1984).

Training routines nullify their objectives if they induce trauma and consequently safety considerations are of paramount importance (Reilly & Thomas, 1978). Since most musculoskeletal injuries are caused by imbalance of internal muscle force and external environmental force, resulting damage to the anatomical biological tissues and structures, biomechanical analysis helps studying these forces and their effects and establishes injury mechanism (Viano *et al.*, 1989).

2.2.7 Prevalence of resistance training injuries

The incidence of injuries during resistance training has increased over the past decade, with 25% - 30% of participants reporting an injury severe enough to seek

medical attention (Powell *et al.*, 1998; Yu & Habib *et al.*, 2005). Resistance training injuries can be classified into acute and chronic injuries.

The most common acute, non-urgent resistance training injuries are muscular strains and ligamentous sprains, accounting for 46% - 60% of all acute injuries in strength training (Calhoon & Fry, 1999; Kerr *et al.*, 2010). There is some disagreement as to the most common injury sites. Research does indicate that there are differences in the prevalence amongst athletes participating in the various strength and power sports such as weightlifting and powerlifting. Ligament ruptures seem to be most associated with inappropriate movement of a joint. Conversely, tendon ruptures are less associated with inappropriate movement of a joint and more from overloading the tensile strength of the tendon. Tendon ruptures occur more frequently in those using certain muscle-enhancing products, those recently having used fluoroquinolones, or those over the age of 40 (Lavalley & Balam, 2010).

Acute injuries can be subcategorized into non-emergent and emergent types. Emergent injuries include acute herniated discs, fractures, dislocations, myocardial infarction and spontaneous pneumothorax. These often require discontinuation of the training and transfer to a medical facility. Non-emergent acute injuries such as small lacerations or mild strains usually only result in a brief respite from lifting (Calhoon & Fry, 1999; Lavalley & Balam, 2010).

Chronic type injuries tend to be as a result of overuse or incorrect training technique or form and account for approximately 30% of injuries associated with resistance training (Calhoon & Fry, 1999; Raske & Norlin, 2002). Tendinopathies are the most common chronic injury to be encountered. Other common chronic injuries include arthritis of the major joints related to repeated stresses placed upon those joints during training and competition over years or even decades of performing the same motion. More severe chronic type injuries include stress fractures. In resistance training, stress fractures are not found in the long bones

as seen in the running sports but located in the spine (i.e. spondylolysis) secondary to the repeated excessive loads placed on the axial spine. Any exercise with increased flexion-to-extension of the lumbar spine under load has a significant risk (Lavallee & Balam, 2010).

There appear to be variations in resistance training injuries when comparing males with females. In a study by Quatman *et al.*, (2009) it was found that women demonstrated a higher risk of accidental injuries and suffered more lower-extremity injuries compared to men. Men, however suffered more exertional-type resistance training injuries such as sprains and strains compared with women, particularly of the trunk (Figure 2.5).

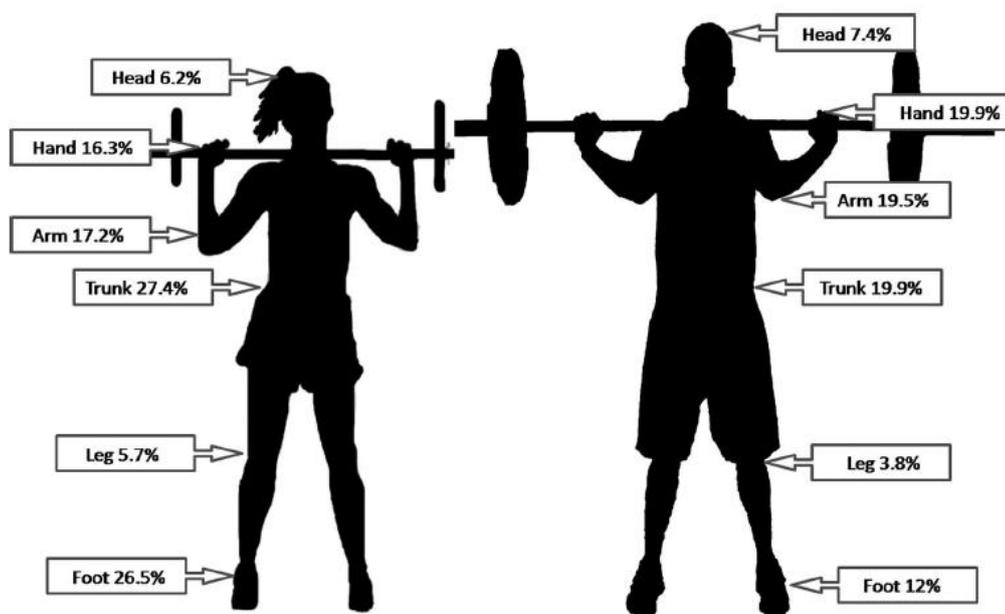


Figure 2.5: Percentage of injuries at each body location for women and men (Quatman *et al.*, 2009).

2.2.8 Resistance training equipment design evaluation

Two aspects regarding the evaluation of resistance training equipment design are discussed below, namely: 3D musculoskeletal modelling as well as the biomechanical and anthropometric analysis of resistance training equipment design.

2.2.8.1 Three dimensional musculoskeletal modelling

A computer model of the human musculoskeletal system is a mathematical description of the body in motion compiled into a computer programme. (Luttgens *et al.*, 1992) (Figure 2.6). The advancement in computer technology and data processing capability has allowed the improvement of modelling software to a point where dynamic problems can now be simulated and analysed in a digital environment (Kim & Martin, 2007; Wagner *et al.*, 2007; Zenk *et al.*, 2005). Furthermore, computer simulations allow for the exploration of the limitations of human movement systems without endangering human subjects (Luttgens *et al.*, 1992).

Mathematical and computer modelling is suitable for a wide variety of applications such as the design, production and alteration of medical equipment (prostheses, orthopaedic and orthodontic devices) as well as sports and training equipment (Alexander, 2003; Kazlauskiené, 2006). With the capability to simulate musculoskeletal human models interacting with mechanical systems many questions concerning the effects of the resistance training equipment on the body can be studied. In addition, computer simulation models permit the study of the complex interactions between biomechanical variables (Kenny *et al.*, 2005).

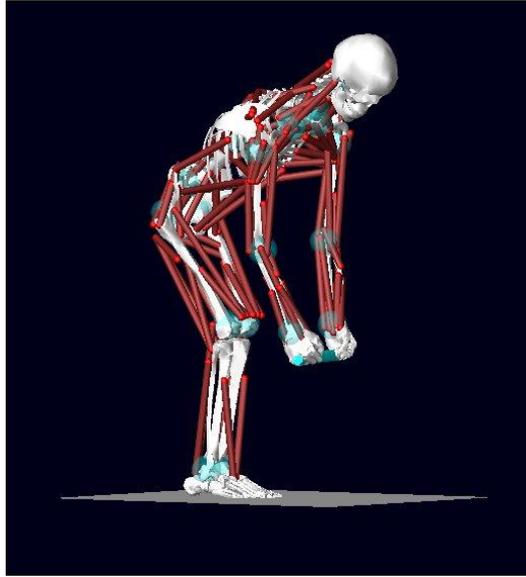


Figure 2.6: Example of LifeModeler™ musculoskeletal human model.

There are two approaches to studying the biomechanics of human movement: inverse dynamics and forward dynamics. The aim of such models is to estimate or predict muscle forces, joint moments and/or joint kinematics (Buchanan *et al.*, 2004). The most widely used digital human modelling software systems, such as Jack and Safework, lack built-in inverse-dynamics capability. However, newer software systems such as LifeModeler™, AnyBody, SIMM and OpenSIMM are making these computations available for ergonomics applications (Wagner *et al.*, 2007). LifeModeler™ and AnyBody software have been used on various research projects in the field of sport, exercise and medicine (Schillings *et al.*, 1996; Rietdyk & Patla, 1999; Hofmann *et al.*, 2006; Agnesina *et al.*, 2006; De Jongh, 2007; Olesen *et al.*, 2009). LifeModeler™ was the software of choice for this study solely due to ease of access through a current South African user which was also able to provide initial training on the software. Anecdotal evidence suggests that LifeModeler™ is currently the only software of its type being used in the South African setting.

The inverse dynamics analysis produces estimates of the joint torques required to perform a specified movement, each of which represents the resultant action of all muscles crossing the joint. Dynamic motion is then achieved (forward dynamics) via activation of the muscles, which subsequently produces force and in turn, move the joints in a controlled fashion to accomplish the pre-determined task, in this case the movement of the piece of equipment. Quite often, these tasks are also required to take place against the action of external forces such as gravity and the resistance of the weights on the exercise machine (Erdemir *et al.*, 2007) (Figure 2.7).

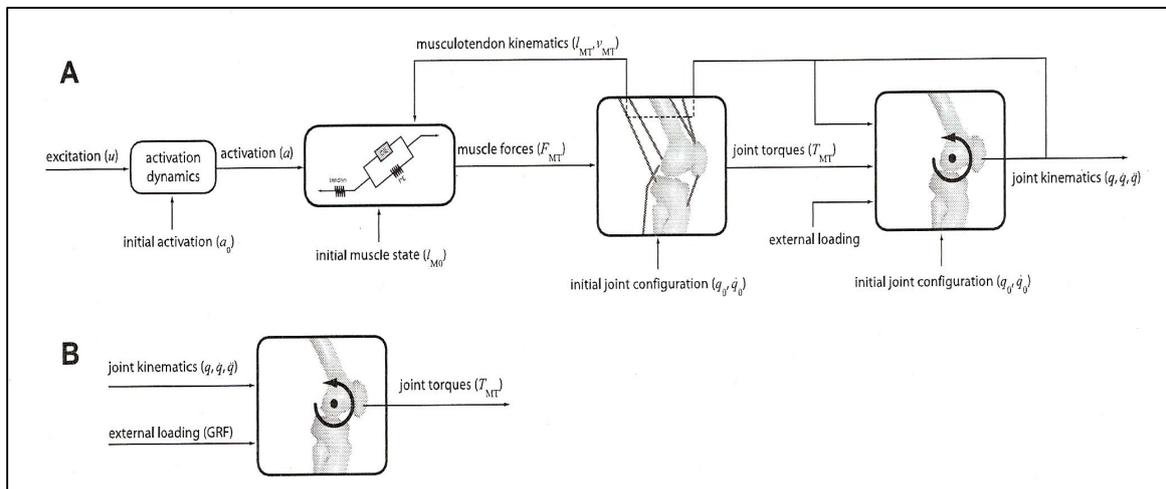


Figure 2.7: Data flow in a musculoskeletal model during forward dynamics simulations. (A) Each step, the integration scheme calculates muscle force and joint kinematics using muscle and kinematic states of the previous step. (B) Data flow in a joint torque-driven model for inverse dynamics simulations. Time history of joint kinematics and external loading are fed into linear algebraic equations to solve joint torques (Erdemir *et al.*, 2007).

Data which can be obtained from LifeModeler™ following the modelling process is presented in table 2.1. LifeModeler™ contains a database of muscle tissue properties. This includes the physiological cross sectional area (pCSA) and the maximum allowable tissue stress in each muscle. Each muscle contains a

contractile element in series with a spring-damper element, storing the input motion and effectively “training” the muscles to reproduce the necessary force to recreate the desired motion. The maximum force transmitted by these muscles is then determined by multiplication of the pCSA and the maximum stress.

The amount of force that can be exerted by each muscle in LifeModeler™ is calculated as follows: $F_{max} = pCSA \times M_{stress}$, where:

- F_{max} is the maximum force that a muscle can exert;
- pCSA is the physiological cross sectional area of the muscle; and
- M_{stress} is the maximum tissue stress of the muscles (Biomechanics Research Group, 2006)

The muscle elements used during the modelling in this study are referred to as closed loop simple muscles. Closed loop muscles contain proportional-integral-differential (PID) controllers. The PID controller algorithm uses a target length-time curve to generate the muscle activation and the muscles follow this curve. Because of this approach, an inverse dynamics simulation using passive recording muscles is required prior to simulation with closed loop muscles. The closed loop algorithm is governed by the following formula: $F = P_{gain}(P_{error}) + I_{gain}(I_{error}) + d_{gain}(d_{error})$, where:

- P_{error} is the target value – current value / range of motion
- D_{error} is the first derivative of P_{error}
- I_{error} is the time integral of P_{error} (Biomechanics Research Group, 2006).

Simple muscles fire with no constraints except for the pCSA, which designates the maximum force a muscle can exert. The graph of simple muscle activation curves will generally peak at a flat force ceiling value.

Where required models can also be driven by joints only without adding musculature to the model. This option creates a trained PID-servo type controller on the joint axis. The joint is commanded to track an angular history spline with a user-specified gain on the error between the actual angle and the commanded error. A user-specified derivative gain is specified to control the derivative of the error.

The LifeModeler™ default model has a full body set of 118 muscle elements attached to the bones at anatomical landmarks, which includes most of the major muscle groups in the body (Table 2.2) (Biomechanics research group, 2006).

Table 2.1 : Data which can be obtained from LifeModeler™ following the modelling process (Biomechanics Research Group, 2006).

Body motion data for each body segment (kinematics)	Position Velocity* Acceleration** Angular acceleration**
Soft tissue data (kinematics)	All muscle force and contraction histories
Joint data (sagittal, transverse and frontal planes)	Torque*** Angle
Contact forces	Contact forces

*Velocity: Linear velocity is the rate at which an object changes its position, it includes the direction and describes the rate of displacement (Floyd, 2009). While angular velocity is the rate of rotary displacement (Hamilton *et al.*, 2009).

**Acceleration: Linear and angular acceleration may be defined at the rate of change of velocity (Floyd, 2009; Hamilton *et al.*, 2009).

***Torque: Torque or moment of force, is the turning effect of an eccentric force (Floyd, 2009).

Table 2.2 : LifeModeler™ default model muscles (Biomechanics Research Group, 2006).

Note that the values in brackets indicate that a muscle might have more than a single element presenting either different heads or fibre orientation.

Scalenus anterior	Iliacus	Psoas major (1-5)
Scalenus medius	Iliopsoas	Psoas minor (1-3)
Scalenus posterior	Gluteus maximus (1-2)	Trapezius (1-4)
Splenius cervicis	Gluteus medius (1-2)	Subclavius
Splenius capitis	Rectus femoris	Latissimus dorsi (1-3)
Sternocleidomastoid	Vastus medialis	Deltoid (1-3)
Rectus abdominis	Vastus lateralis	Biceps brachii (1-2)
Obliques	Biceps femoris (1-2)	Brachialis
Erector Spinae (1-3)	Semitendinosus	Triceps brachii (1-3)
Pectoralis major (1-5)	Adductor magnus	Pronator teres
Pectoralis minor (1-3)	Gastrocnemius (1-2)	Flexor carpi (1-2)
	Soleus	Flexor pollicis
	Tibialis anterior	Flexor digitorum
		Extensor carpi
		Extensor digitorum
		Abductor pollicis

2.2.8.2 Biomechanical and anthropometric analysis of resistance training equipment design

Anthropometry is the science of measurement and the art of application that establishes the physical geometry, mass properties and strength capabilities of the human body. The name derives from anthropos, meaning human, and metrikos, meaning of or pertaining to measuring (Roebuck, 1993).

When exercising, people may adopt unhealthy postures that put strain on their musculoskeletal system especially when they are adopted for extended periods of time. The cause of exercisers adopting unhealthy postures may be the result of a number of factors, namely:

- The design of the exercise equipment. Limitations in the equipment design that does not allow adjustability to accommodate the appropriate range of anthropometric variances;
- Limited knowledge regarding correct exercise technique and/or posture;
- Fatigue; and
- Overloading i.e. trying to lift excessive resistance.

When designing equipment to promote appropriate exercise posture, anthropometric data should be considered a key resource. It is important that exercise equipment accommodates a range of anthropometric dimensions that is suited to the population group (end-user population) that will make use of the equipment.

Other factors can also be assessed to determine musculoskeletal injury risk such as maximal muscle tensions. Muscle tensions near or higher than maximum calculated capacity or above realistic measurements for the muscle group could indicate risk for musculoskeletal injuries. It is also possible to compare safe-loading limits of joints with recorded values during the 3D musculoskeletal modelling. The limitation of this approach is that limited safe-loading joint limit values are available and the most readily available are those for the spine. The vulnerable joints during a particular exercise vary according to the requirements of the movement and the joints involved in the movement however in most exercises the spinal column remains a commonly injured area (acute or chronic) of the body and therefore it is useful to assess these values (Calhoun & Fry, 1999; Lavalley & Balam, 2010).

Both anthropometry and muscle force production could be used in assessing exercise efficacy. Force exertion in any movement will involve many muscles, some acting as prime movers in generating force and others acting to stabilise the joints in the rest of the body. Force is exerted through the body like a “kinetic chain”. Thus, the limiting factor in the maximum force that can be exerted is most

likely to be determined by the weakest link (the most highly stressed muscle). When a person is forced to adopt an awkward posture for exertion, it is likely that some of the muscles in the kinetic chain will be attempting to exert torque under less than optimal conditions with either muscle length or movement arm sub-optimal thereby decreasing the efficacy of the exercise and possibly increasing the risk of injury as well (Delleman *et al.*, 2004).

With the complexity of such kinetic chains, it is obvious that there will be wide individual variations in strength and risk of injury due to anatomical variability, differences in anthropometric dimensions and differences in physiological condition (muscle fibre composition, strength and fitness) (Delleman *et al.*, 2004). Nevertheless, common principles can be established for postural strategies that can assist in allowing an individual to exert maximum force when performing a particular exercise and lowest risk to injury. These principles can be used in forming guidelines for the design of exercise equipment as high forces will be exerted.

2.3 CONCLUSION

The popularity of training and exercise, specifically resistance training has increased dramatically over the last few years. Unfortunately it does not appear as if most pieces of exercise equipment undergo any vigorous scientific evaluation focusing on the anthropometric and biomechanical considerations of the end-user. 3D musculoskeletal modelling may be a practical way of evaluating resistance training equipment thus decreasing the risk of injury and maximising the efficacy of the exercise for the exerciser.

2.3 REFERENCES

Agnesina, G., Taiar, R., Havel, N., Guelton, K., Hellard, P. & Toshev, Y. (2006). BRG.LifeMOD™ modeling and simulation of swimmers impulse during a grab start. *Proceedings of the 9th symposium on 3D analysis of human movement*. Valenciennes.

Alexander, R.McN. (2003). Modelling approaches in biomechanics. *Philosophical Transactions of the Royal Society*, **358**, 1429 – 1435.

Beachle, T.R. & Earle, R.W. (2008). *Essentials of strength training and conditioning*. Champaign: Human Kinetics.

Beachle, T.R., and Groves, B.R. (1992). *Weight training. Steps to success*. Champaign: Human Kinetics.

Biomechanics Research Group, Inc. (2006). *LifeMOD biomechanics modeler manual*.

Buchanan, T.S., Lloyd, D.G., Manal, K. & Besier, T.F. (2004). Neuromuscular modelling: Estimation of muscle forces and joint moments and movements from measurements of neural command. *Journal of Applied Biomechanics*, **20**, 369 – 395.

Calhoon, G & Fry, A.C. (1999). Injury rates and profiles of elite competitive Olympic weightlifters. *Journal of Athletic Training*, **34(3)**, 232 – 8.

Chui, L.Z.F., Schilling, B.R., Fry, A.C. & Salem, G.F. (2008). The influence of deformation on barbell mechanics during the clean pull. *Sport Biomechanics*, **7(2)**, 260 – 273.

De Jongh, C. (2007). *Critical evaluation of predictive modelling of a cervical disc design*, Unpublished Masters thesis, University of Stellenbosch.

Delleman, N.J., Haslegrave, C.M. & Chaffin, D.B. (2004). *Working postures and movements: Tools for evaluation and engineering*. Boca Raton: CRC Press.

Erdemir, A., McLean, S., Herzog, W. & van den Bogert, A.J. (2007). Model-based estimation of muscle forces exerted during movements. *Clinical Biomechanics*, **22**, 232 – 254.

Fleck, W.J. & Kraemer, S.J. (1997). *Designing resistance training programs*. Champaign: Human Kinetics.

Floyd, R.T. (2009). *Manual of structural kinesiology (17th Ed.)*. New York: McGraw-Hill.

Heyward, V.H. (2006). *Advanced fitness assessment and exercise prescription*. Champaign: Human Kinetics.

Hamilton, N., Weimar, W. & Luttgens, K. (2009). *Kinesiology. Scientific basis of human motion (11th Ed.)*. New York: McGraw-Hill.

Hockey, R.V. (1996). *Physical fitness. The pathway to healthful living (8th Ed.)*. Missouri: McGraw-Hill.

Hofmann, M., Danhard, M., Betzler, N., Witte, K. & Edelmann, J. (2006). Modelling with BRG.lifeMOD™ in Sport Science. *International Journal of Computer Science in Sport*, **5**.

Howley, E.T. (2007). *Fitness professional's handbook (5th Ed.)*. Champaign: Human Kinetics.

Johnson, A.T. (2007). *Biomechanics of exercise physiology: Quantitative Modeling*. Boca Raton: CRC Press.

Kang, J. (2008). *Bioenergetics primer for exercise science*. Champaign: Human Kinetics.

Kazlauskienė, K. (2006). *Design and research of biomechanical models of human with joint replacements*, Unpublished Doctoral Thesis, Kaunas University of Technology.

Kenny, I.C., Wallace, E.S., Brown, D. & Otto, S.R. (2005). *Validation of a full-body computer simulation of the golf drive for clubs of differing length*. University of Ulster: R & A Limited.

Kerr, Z.Y., Collins, C.L., Comstock, R.D. (2010). Epidemiology of weight training-related injuries presenting to United States emergency departments, 1990 - 2007. *American Journal of Sports Medicine*, **38(4)**, 765 – 772.

Kim, H. & Martin, B.J. (2007). Estimation of body links transfer functions in vehicle vibration environment. *Proceedings of the 2007 digital human modelling for design and engineering conference*. Seattle.

Lavallee, M.E. & Balam, T. (2010). An overview of strength training injuries: Acute and chronic. *Current Sports Medicine Reports*, **9(5)**, 307 – 313.

Life Fitness. (2007). *Product catalog*. Schiller Park.

Lynch, N.A., Metter, E.J., Lindle, R.S., Fozard, J.L., Tobin, J., Roy, T., Fleg, J.L. & Hurley, B. (1999). Muscle Quality I: Age associated differences in arm vs. leg muscle groups. *Journal of Applied Physiology*, **86**, 188 – 194.

Lou, S.L., Chen, Y.C., You, J.Y. & Hsu, C.K. (2007). Functional evaluation of elliptical trainer with human motion analysis, *Proceedings of 2007 International Society of Biomechanics Conference*, Taiwan.

Luttgens, K., Deutsche, H. & Hamilton, N. (1992). *Kinesiology: Scientific basis of human motion (8th Ed.)*. Dubuque: Brown and Benchmark.

Maud, J.M. & Foster, C., (2006). *Physiological assessment of human fitness. (2nd Ed.)*. Champaign: Human Kinetics.

McArdle, W.D., Katch, F.I. & Katch, V.L. (1996). *Exercise physiology: Energy, nutrition, and human performance (4th Ed.)*. Baltimore: Williams and Wilkins.

Olesen, C.G., Andersen, M.S., Rathleff, M.S., de Zee, M. & Rasmussen, J. (2009). Understanding the biomechanics of medial tibial stress syndrome – A simulation study using a musculoskeletal model. *Proceedings of the 2009 International Society of Biomechanics*. Cape Town.

Pearl, B. & Moran, G.T. (1986). *Getting stronger: Weight training for men and women*. Bolinas: Helter Publications Inc.

Powell, K.E., Heath, G.W., Kresnow, M.J., Sacks, J.J. & Branche, C.M. (1998). Injury rates from walking, gardening, weightlifting, outdoor bicycling, and aerobics. *Medicine & Science in Sports & Exercise*, **30**, 1246 – 1249.

Prentice, W.E. (2003). *Fitness and wellness for life (7th Ed.)*. Missouri: McGraw-Hill.

Quatman, C.E., Myer, G.D., Khoury, J., Wall, E.J., Hewett, T.E. (2009). Sex differences in “weightlifting” injuries presenting to United States emergency rooms. *Journal of Strength and Conditioning Research*, **23(7)**, 2061 – 2067.

Raske, A. & Norlin, R. (2002). Injury incidence and prevalence among elite weight and powerlifters. *American Journal of Sports Medicine*, **30(2)**, 248 – 256.

Reilly, T. & Lees, A. (1984). Exercise and sports equipment: Some ergonomics aspects. *Applied Ergonomics*, **15**, 259 – 279.

Reilly, T. & Thomas, V. (1978). Multi-station equipment for physical training: design and validation of a prototype. *Applied Ergonomics*, **9**, 201 – 206.

Reiser, R.F., Mackey, D.T. & Overman, J.W. (2007). Between the beginning and end of a repetition: How intrinsic and extrinsic factors influence the intensity of a biceps curl. *National Strength and Conditioning Association*, **29**, 64 – 76.

Rietdyk, S. & Patla, A.E. (1999). *Context-dependent reflex control: Some insights into the role of balance*. *Experimental Brain Research*, **119**, 251 – 259.

Roebuck, J.A. (1993). *Anthropometric Methods: Designing to fit the human body*. Santa Monica: Human Factors and Ergonomics Society.

Schillings, A.M., Van Wezel, B.M. & Duysens, J. (1996). Mechanically induced stumbling during human treadmill walking. *Journal of Neuroscience Methods*, **67**, 11 – 17.

Stone, M.H., Collins, D., Plisk, S., Hoff, G. & Stone, M.E. (2000). Training principles: Evaluation of modes and methods of resistance training. *National Strength and Conditioning Association*. **22 (3)**, 65 – 76.

Vaughn, C.L. (1989). *Biomechanics of sport*. Florida: CRC Press.

Viano, D.C., King, A.I., Melvin, J.W. & Weber, K. (1989). Injury biomechanics research: An essential element in the prevention of trauma. *Journal of Biomechanics*, 22, 403 – 417.

Wagner, D., Rasmussen, J. & Reed, M. (2007). Assessing the importance of motion dynamics for ergonomic analysis of manual materials handling tasks using the AnyBody modelling system. *Proceedings of the 2007 digital human modelling for design and engineering conference*. Seattle.

Yu, J & Habib, P. (2005). Common injuries related to weightlifting: MR imaging perspective. *Seminars in Musculoskeletal Radiology*. **9**, 289 – 301.

Zenk, R., Franz, M. & Bubb, H. 2005. Spine load in the context of automotive seating. *Proceedings of the 2007 digital human modelling for design and engineering conference*. Seattle.

CHAPTER 3

THREE DIMENSIONAL MUSCULOSKELETAL MODELLING OF THE SEATED BICEPS CURL RESISTANCE TRAINING EXERCISE FOCUSING ON THE BIOMECHANICAL AND ANTHROPOMETRIC CONSIDERATIONS OF THE END-USER

Kim Nolte¹, Pieter E. Krüger¹, & P. Schalk Els²

¹*Department of Biokinetics, Sport and Leisure Sciences, University of Pretoria, Pretoria, South Africa,* ²*Department of Mechanical and Aeronautical Engineering, University of Pretoria, Pretoria, South Africa*

Publication: Accepted by Sports Biomechanics on 24 March 2011.

Abstract

The aim of this study was to evaluate whether three dimensional (3D) musculoskeletal modelling is effective in assessing the safety and efficacy of exercising on a seated biceps curl resistance training machine. The focus of the evaluation was on biomechanical and anthropometric considerations of the end-user. Three anthropometric cases were created; these represented a 5th percentile female as well as a 50th and 95th percentile male based on body mass index (BMI). Resistance on the biceps curl machine was set at fifty percent of the functional strength one repetition maximum (1RM) for each anthropometric case, two repetitions were performed. Results indicated that the LifeModeler™ default model was not adequate to solve the forward dynamics simulations and therefore adjustments had to be made to the default model to successfully complete the forward dynamics simulations. The software was able to indicate the anthropometric differences with regards to the biceps curl machine's engineered adjustability as the 5th percentile female was accommodated poorly on the machine. However, the poor positioning of the small female did not appear to put her at increased risk for injury in comparison to the other two

anthropometric cases. High recorded lumbar spine anterior/posterior (A/P) shear forces for the three anthropometric cases and maximum muscle tensions for the female and 50th percentile male indicate that the seated biceps curl exercise may pose a risk for injuries. To conclude, it appears as if 3D musculoskeletal modelling can be used to evaluate resistance training equipment such as the seated biceps curl machine however the limitations as indicated by this study must be taken into consideration especially when using the default LifemodelerTM model.

Keywords: *Resistance training equipment, seated biceps curl, biomechanics, anthropometric, modelling, LifemodelerTM, inverse dynamics, forward dynamics*

Introduction

Resistance training refers to a method of conditioning designed to overload the musculoskeletal system, leading to accelerated enhancement of muscle strength (Fleck and Kraemer, 1997). Traditionally, resistance training was used primarily by adult athletes to enhance sport performance and increase muscle size. Today, it is recognized as a method of enhancing the health and fitness of men and women of all ages and abilities (Howley, 2007). The popularity of resistance training is clearly evidenced by the extensive growth of fitness centres and sales of resistance exercise equipment for home use (Vaughn, 1989; Lou *et al.*, 2007).

Design of exercise equipment is a complicated task and warrants consideration of a series of biomechanical and ergonomics factors. Furthermore, there is inevitably increased loading on certain parts of the body due to the repetitive nature of exercises. Improvement in equipment design could reduce these hazards and offset such a negative effect on the body (Dabnichki, 1998). Currently, there is no regulation of exercise equipment design and production in South Africa. Therefore, a need exists to subject such pieces of equipment to evaluation methods of which the goal is to ensure the equipment's efficacy as well as the safety of the end-user.

Mathematical and computer modelling is suitable for a wide variety of applications such as the design, production and alteration of medical equipment (prostheses, orthopaedic and orthodontic devices) as well as sports and training equipment (Alexander, 2003; Kazlauskiené, 2006). With the capability to simulate musculoskeletal human models interacting with mechanical systems, three dimensional (3D) musculoskeletal modelling may be able to answer many questions concerning the effects of the resistance training equipment on the body. In addition, computer simulation models permit the study of the complex interactions between biomechanical variables (Kenny *et al.*, 2005). Thus the primary aim of this study was to determine the efficacy of a default 3D musculoskeletal model in evaluating resistance training equipment design.

In a series of articles 3D musculoskeletal modelling, with a focus on biomechanical and anthropometric variables, will be used to evaluate four commonly used pieces of resistance training equipment in order to assess the suitability of this method for exercise equipment design evaluation. This study presents the musculoskeletal modelling of three anthropometric cases while exercising on a commercially available seated biceps curl resistance training machine.

The biceps curl exercise is a commonly used, predominantly single joint open-kinetic-exercise used to isolate the biceps muscles. The Biceps brachii, from which the exercise derives its name, Brachialis and Brachioradialis muscles contribute most to this action, with assistance from the Pronator teres and wrist flexor group (Durall, 2004; Reiser *et al.*, 2007). There are many variations of the traditional biceps curl exercise using dumbbells, barbells and machines. Incline dumbbell curls and dumbbell preacher curls are two variations of the standard dumbbell biceps curl generally applied to optimize Biceps brachii contribution during elbow flexion by fixing the shoulder angle at a specific position. These different protocols may impose different demands to the neuromuscular system, resulting in different solutions for the load sharing between elbow flexors (Oliveira *et al.*, 2009). The biceps curl exercise regardless of variation can be divided into two phases: (1) lifting phase to flexed position and (2) lowering phase to extended position (Floyd, 2009).

Methods

Equipment

A 3D musculoskeletal full body model was created using LifeModeler™ software and incorporated into a multibody dynamics model of the seated biceps curl exercise machine modelled in MSC ADAMS (Figure 1). The LifeModeler™ software runs as a plug-in on the MSC ADAMS software. LifeModeler™ software has previously been used in studies in the fields of sport, exercise and medicine (Schillings *et al.*, 1996; Rietdyk *et al.*, 1999; Hofmann, *et al.*, 2006; Agnesina *et*

al., 2006; De Jongh, 2007; Olesen *et al.*, 2009). It was decided to evaluate a default model as generated through the software. This model consisted of 19 segments including a base set of joints for each body region. Specifically, the spine does not consist of individual vertebrae but rather of various segments that represent different regions of the vertebral column with joints between these segments. The default model has a full body set of 118 muscle elements attached to the bones at anatomical landmarks, which includes most of the major muscle groups in the body. Closed loop simple muscles were modelled. Closed loop muscles contain proportional-integral-differential (PID) controllers. The PID controller algorithm uses a target length-time curve to generate the muscle activation and the muscles follow this curve. Because of this approach, an inverse dynamics simulation using passive recording muscles is required prior to simulation with closed loop muscles. Simple muscles fire with no constraints except for the physiological cross-sectional area (pCSA), which designates the maximum force a muscle can exert. The graphs of simple muscle activation curves will generally peak at a flat force ceiling value (Biomechanics research group, 2006).

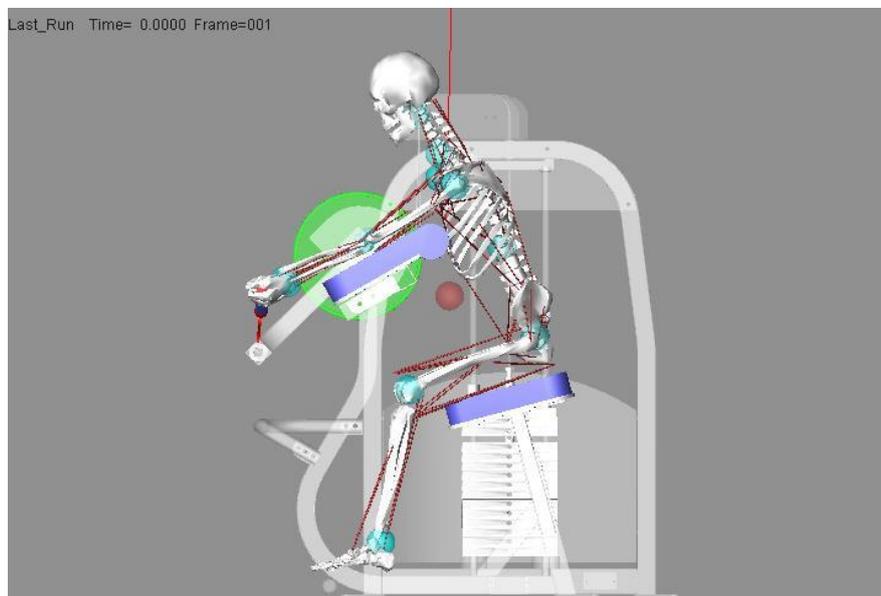


Figure 1. 3D musculoskeletal modelling of the biceps curl resistance training machine and 50th percentile male musculoskeletal model using LifeModeler™ and MSC ADAMS software.

Musculoskeletal full body human and seated biceps curl computer aided design (CAD) models

Three anthropometric cases were created for each piece of equipment. The human models were created using the GeBOD anthropometry database (default LifeModeler™ database) but were based on body mass index (BMI) data obtained from RSA-MIL-STD 127 Vol 1 (2004). This standard is a representative anthropometry standard of the South African National Defence Force (SANDF) which is kept current by a yearly sampling plan and is an accurate representation of the broader South Africa population. Bredenkamp (2007) described a process to characterize the body forms of SANDF males and females. Body form variances described by two principle components (PC's) for the SANDF males and two PC's for SANDF females were included in the modelling process. Positive and negative boundary cases of each PC, representing the boundary conditions to be accommodated in design (Gordon and Brantley, 1997), identified the total range of four male and four female models. It was decided to use the cases representing the smallest female as well as an average and large male for the three anthropometric cases for this study. These cases could be seen as what are traditionally known as a 5th percentile female, 50th percentile male and a 95th percentile male based on the BMI of each of these cases. Thus, for the purpose of building these biomechanical models, a correlation between BMI and functional body strength was assumed. Similar assumptions have previously been made in biomechanics full body model simulations (Rasmussen *et al.*, 2007). A study by Annegarn *et al.* (2007) also verified scaled modelling strengths against actual functional body strengths and correlations ranged from 0.64 to 0.99.

This approach was followed in order to ensure that the equipment can accommodate an acceptable sample of the South African end-user population. A CAD model of the seated biceps curl resistance training machine was obtained from a South African exercise equipment manufacturing company. The model in a Parasolid file format was imported into the ADAMS simulation software.

The Adams software was used to create two design variables in order to adjust the external resistance (as selected by the amount of weights when using a selectorised resistance training machine) and to specify the radius of the cam over which the cable of an actual exercise machine would run in order to lift the selected resistance. This was possible since this machine employed a circular cam system however, this would not be possible with exercise machines employing non-circular cam systems, in order to attain better mechanical advantage for the end-user. A special contact force (solid to solid) was created between the weights being lifted and the remainder of the weight stack during the simulation. A coupler joint was created linking the revolute joint (driver) of the lever arm attached to the handle bars with the translational joint of the weight stack. The design variable created for the radius of the cam was referenced as the scale of the coupled joint (translational joint at weights). The design variable created for the mass of the weights was then adjusted according to the pre-determined resistance for each anthropometric case.

The external resistance applied in the models was based on data obtained from RSA-MIL-STD 127 Vol 5 (2001). This database consists of a range of human functional strength measurement variables for SANDF males and females. Due to its representivity this standard may be considered an accurate representation of the functional body strength of the South Africa population (RSA-MIL-STD-127, 2001). Furthermore, functional strength data was used from activities that most closely resembled the movements of the exercise as well as the muscle groups used during such movement. Fifty percent of the functional strength one repetition maximum (1RM) for each anthropometric case was used as this can be considered a manageable resistance to perform an exercise with appropriate form and technique for two repetitions.

Simulation

Extreme care was taken with the positioning of the musculoskeletal model onto the seated biceps curl machine to ensure technique, posture and positioning was

correct according to best exercise principles (Table I). Furthermore, total manufacturer adjustability of the exercise machine was used in order to ensure correct positioning for each of the anthropometric cases. The following steps were performed in order to ensure realistic kinematics during the inverse dynamics simulations: 1) Positioning of the human model on the exercise equipment, 2) Adjustment of the posture to allow for the human machine interface to be created, 3) Creating the constraints between the human and machine, 4) Prescribing the motion of the repetitions, 5) Evaluation of the resultant kinematics, 6) Adjustment of joint positions until inverse dynamics resulted in a realistic exercise movement. Bushing elements were used to secure the arms at the left and right humerus, as well as the upper torso at the sternum to the preacher curl “platform” and spherical joints were used to connect the hands to the handle bars of the biceps curl machine. Bushings were also used in order to secure the lower torso to the seat of the exercise machine. Bushing elements were preferred to fixed joint elements because it allows for limited translational and rotational motion. Also, the amount of motion can be controlled by changing stiffness and damping characteristics in all three Orthogonal directions.

Table I. Starting exercise posture for the 3 anthropometric cases on the biceps curl resistance training machine. Results are presented for the sagittal, transverse and frontal planes (degrees). Note that F = flexion, E = extension, ER = external rotation and AB = abduction.

Joint	5 th percentile female	50 th percentile male	95 th percentile male
Scapula	0.0; 0.0; 0.0	0.0; 0.0; 0.0	0.0; 0.0; 0.0
Shoulder	85.5(F); 0.0; 0.0	85.5(F); 0.0; 0.0	85.5(F); 0.0; 0.0
Elbow	15.0(F); 0.0; 0.0	8.0(F); 0.0; 0.0	8.0(F); 0.0; 0.0
Wrist	0.0; 60.0(ER); 0.0	0.0; 60.0(ER); 0.0	0.0; 60.0(ER); 0.0
Hip	45.0(F); 0.0; 8.0(AB)	62.0(F); 0.0; 8.0(AB)	62.0(F); 0.0; 8.0(AB)
Knee	70.0(F); 0.0; 0.0	50.0(F); 0.0; 0.0	50.0(F); 0.0; 0.0
Ankle	13.0(E); 0.0; 0.0	13.0(E); 0.0; 0.0	13.0(E); 0.0; 0.0
Upper neck	0.0; 0.0; 0.0	0.0; 0.0; 0.0	0.0; 0.0; 0.0
Lower neck	0.0; 0.0; 0.0	0.0; 0.0; 0.0	0.0; 0.0; 0.0
Thoracic	0.0; 0.0; 0.0	0.0; 0.0; 0.0	0.0; 0.0; 0.0
Lumbar	30.0(F); 0.0; 0.0	30.0(F); 0.0; 0.0	32.0(F); 0.0; 0.0

The inverse dynamics – forward dynamics method was applied during the simulations. Inverse dynamics simulations are performed on models which are being manipulated by the use of motion agents or motion splines. During the inverse dynamics simulation, a rotational motion was applied to the revolute joint of the lever arm attached to the handle bars of the biceps curl machine in order to generate the required movement of the resistance training machine. This movement replicated the pulling (concentric) and resisting (eccentric) phase of the exercise. The time for the concentric phase was set at 1.41 seconds and the eccentric phase slightly longer at 2.84 seconds to mimic conventional resistance training technique in which the downward phase is more deliberate to prohibit the use of momentum. The 1.41 second concentric phase included a STEP function approximation over 0.5 seconds to ensure a gradual start to the movement. The muscles of the model were trained during the inverse dynamics simulation in order to calculate the changes in muscle lengths to result in the required machine movement.

After the inverse dynamics simulation was performed, the rotational motion was removed from the rotational joint of the lever arm of the seated biceps curl machine. The recorded muscle length changes and resulting joint movements were then used to drive the model during the forward dynamics simulation in the manner as developed through the inverse dynamics simulation. During the forward dynamics simulation the model is guided by the internal forces (muscle length changes resulting in joint angulations and torques) and influenced by external forces (gravity, contact and determined exercise resistance). It is important to note that changes had to be made to the LifeModeler™ default model in order to solve the models with plausible kinematics during the forward dynamics simulations. Considering the research problem the detail of these changes will be discussed under the discussions section. All results presented are derived from the forward dynamics simulations after these changes to the default model were made.

Data analysis

The anthropometric dimensions and exercise postures of the musculoskeletal human models were visually assessed in relation to the dimensions and adjustability of the resistance training equipment in order to determine if all three anthropometric cases representative of the South African end-user population could comfortably be accommodated on the seated biceps curl resistance training machine. Key aspects included start and end exercise posture as well as maintaining correct exercise technique throughout the exercise during the simulation. Start and end exercise posture evaluation entailed positioning of the axilla on the top of the preacher curl “platform” as to support the back of the upper arms, alignment of the elbow joint with the axis of rotation of the machine, hip flexion between 80 – 90 degrees and a knee angle of approximately 90 – 100 degrees. The feet are supposed to be positioned flat on the ground. Correct technique was assessed in terms of limited compensatory movements and performing the biceps curl through the full range of motion as determined by the inverse dynamics.

The kinematic and kinetic data from the simulations were analysed specifically in terms of peak muscular force production of the prime movers of the seated biceps curl. Thus for the purpose of this study, efficacy of the equipment was assessed by evaluating whether the equipment exercised the muscles it was designed for, does the biceps curl machine exercise the prime flexors of the elbow joint? Furthermore, the risk of injury to the musculoskeletal system of the exerciser was ascertained by comparison of measured forces with safe loading limits for joints of the lumbar and thoracic spine (since no loading limits were found for the elbow joint) found in the literature as well as the peak muscular forces for the prime flexors of the elbow. Injury risk to both these structures are real especially when lifting excessive masses and or during execution of exercise with poor postures.

The statistical analyses of the results were completed using the STATISTICA© software package (Statsoft). Due to the nature of this study basic descriptive statistics were performed and a Pearson's product moment correlation coefficient was used to determine relationships between appropriate variables. Statistical significant differences were indicated by a p-value of less than 0.05.

Results

Table II presents the body mass and stature of the three anthropometric cases based on BMI data obtained from RSA-MIL-STD 127 Vol 1 (2004). Table III presents the external resistance the models had to overcome during the forward dynamics simulations, fifty percent of the functional strength 1RM for each anthropometric case was used for two repetitions.

Table II. Anthropometric details of population groups studied (RSA-MIL-STD, Vol 1, 2004).

User population group	Body mass (kg)	Stature (mm)
5 th percentile female	49.5	1500
50 th percentile male	65.0	1720
95 th percentile male	85.0	1840

Table III. User population strength data (RSA-MIL-STD, Vol 5, 2001).

User population group	User population group exercise resistance (50% 1RM) kg
5 th percentile female	12
50 th percentile male	22
95 th percentile male	35

The LifeModeler™ default model was not adequate to solve the forward dynamics simulations for any of the anthropometric cases. In order to solve this problem the following adjustments were made to the default model: 1) an increase in the pCSA of the three default elbow flexor muscles, 2) manipulate the

muscle origins and insertions and 3) decrease the joint stiffness in the forward dynamics simulations.

Muscle force production (N), contraction (shortening and lengthening) (mm) and joint torque (Nm) for the right side are reported on. Theoretically, the results of the left and right side should be similar however this could have been slightly influenced by the alignment of the seat and preacher curl “platform”.

Force production of the Biceps brachii short head (BBS) and Biceps brachii long head (BBL) and the Brachialis (B) muscles are presented in Table IV. The peak force production is the highest for the BBL in comparison to the BBS in all the anthropometric cases. The peak B muscle force production was less than either the BBS or BBL for all the anthropometric cases except for the 95th percentile male whose peak B muscle force production was equal to his BBS muscle force production. The 5th percentile female exerted the highest force for all muscles followed by the 50th percentile male and lastly the 95th percentile male.

Table IV. Right Biceps brachii and Brachialis muscles force production (N) results for the 3 anthropometric cases.

Musculoskeletal model	Muscle	Mean (N)	Min.	Max.
5 th percentile female	Biceps brachii short head (BBS)	255.5	-8.8	268.9
	Biceps brachii long head (BBL)	235.5	-9.5	329.5
	Brachialis (B)	152.9	-6.7	215.1
50 th percentile male	Biceps brachii short head (BBS)	209.7	48.9	221.5
	Biceps brachii long head (BBL)	225.3	135	267.7
	Brachialis (B)	166.5	52.9	172.6
95 th percentile male	Biceps brachii short head (BBS)	205.8	2.9	172.3
	Biceps brachii long head (BBL)	60.4	-4.1	215.9
	Brachialis (B)	149.9	0.2	172.3

Absolute muscle contraction results for the BBS, BBL and B muscles are presented in Table V. The mean muscle length is greatest for the BBS in comparison with the BBL for all the anthropometric cases. Furthermore, the maximum, minimum and mean muscle lengths are smaller for the B muscle in

comparison to both the heads of the BB muscle for all three anthropometric cases. The mean muscle contraction length for all the muscles is greatest for the 95th percentile male and smallest for the 5th percentile female.

Table V. Right Biceps brachii and Brachialis absolute muscles contraction (mm) results for the 3 anthropometric cases.

Musculoskeletal model	Muscle	Mean (mm)	Min.	Max.
5 th percentile female	Biceps brachii short head (BBS)	239.2	228.9	253.9
	Biceps brachii long head (BBL)	217.0	206.8	235.9
	Brachialis (B)	105.6	103.5	112.0
50 th percentile male	Biceps brachii short head (BBS)	300.6	281.1	315.8
	Biceps brachii long head (BBL)	274.8	253.8	294.3
	Brachialis (B)	131.9	122.6	142.5
95 th percentile male	Biceps brachii short head (BBS)	330.5	307.5	349.5
	Biceps brachii long head (BBL)	303.9	280.7	325.3
	Brachialis (B)	143.3	129.8	156.5

Due to the involvement of wrist and elbow joints in the biceps curl exercise, torque for these joints is presented in Table VI. The mean wrist torque is lower than the mean elbow torque for all three the anthropometric cases. Furthermore, the torque values for both joints are lowest for the 5th percentile female and highest for the 95th percentile male.

Table VI. Right wrist and elbow joint torque (Nm) results in the sagittal plane for the 3 anthropometric cases. Note that the torque values presented in the Figures are in Nmm due to the default units of the modelling software.

Musculoskeletal model	Joint	Mean (Nm)	Min.	Max.
5 th percentile female	Wrist	0.8	2.8	3.9
	Elbow	3.7	-28.3	11.6
50 th percentile male	Wrist	1.9	-4.2	3.7
	Elbow	8.1	5.4	17.7
95 th percentile male	Wrist	3.4	0.2	6.2
	Elbow	12.6	1.8	25.3

The length (contraction) of the BBL muscle was shortest at approximately 1.6 s and 5.6 s (Figure 2). The correlation between sagittal elbow joint angle and joint torque was statistically significant ($p < 0.05$) for all three anthropometric cases (5th percentile female: $r = -0.87$, 50th percentile male: $r = -0.87$, 95th percentile male: $r = -0.98$). Therefore as the muscles shortened and the elbow joint angle decreased the joint torque increased.

Maximum elbow joint torque production was produced at approximately 1.6 s and 5.6 in the three anthropometric cases (Figure 3 and 4).

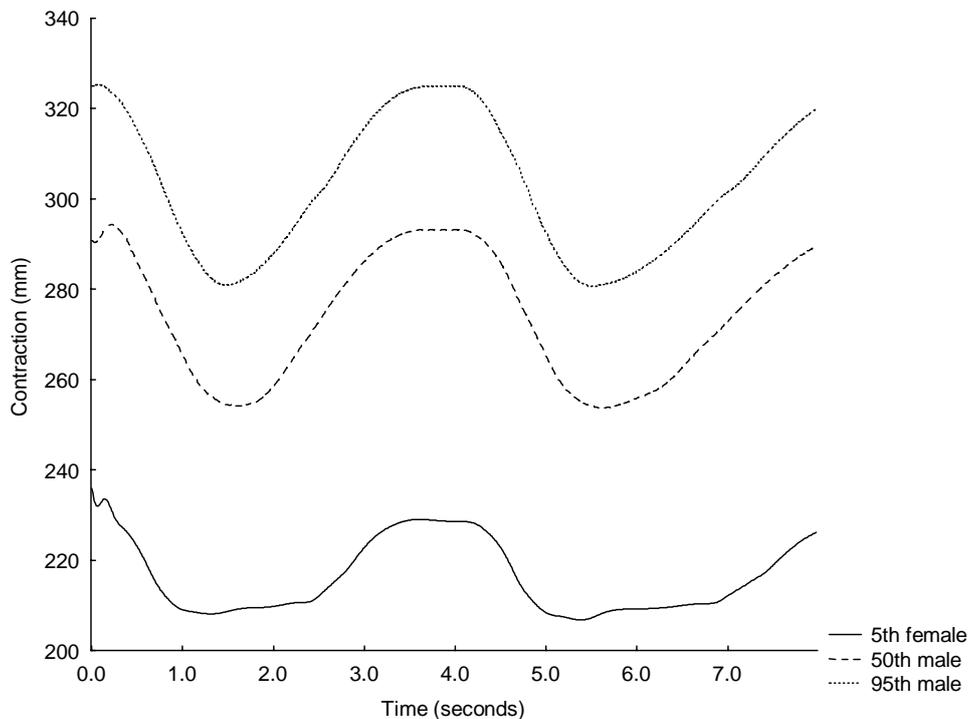


Figure 2. Long head of the Biceps brachii contraction (mm) for the 3 anthropometric cases (2 repetitions).

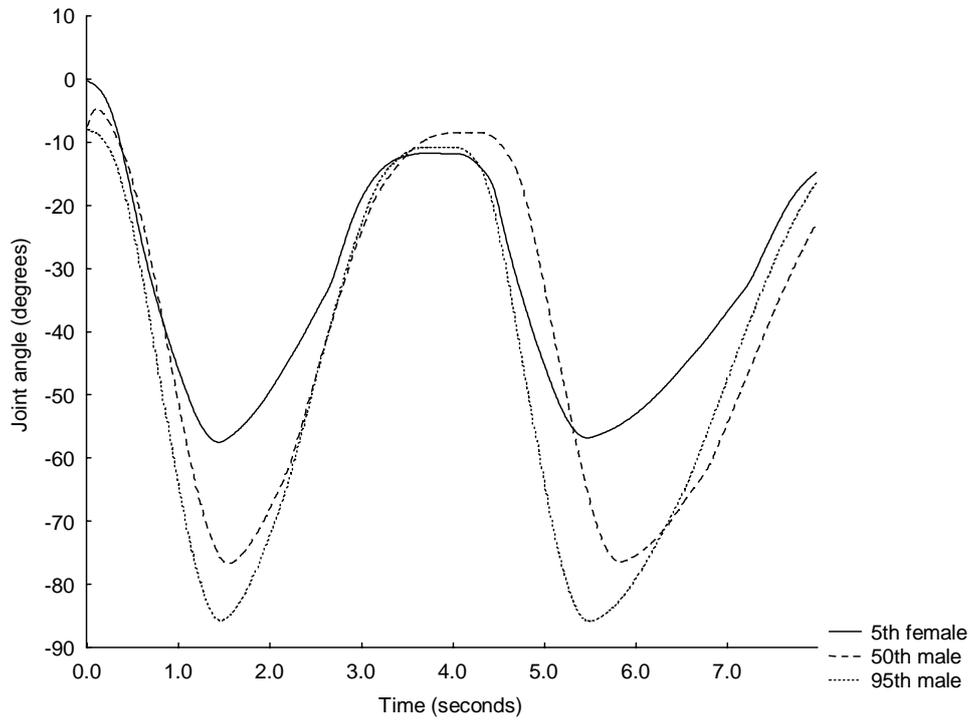


Figure 3. Sagittal elbow joint angle (°) for the 3 anthropometric cases (2 repetitions). Note: negative joint angle indicates elbow flexion.

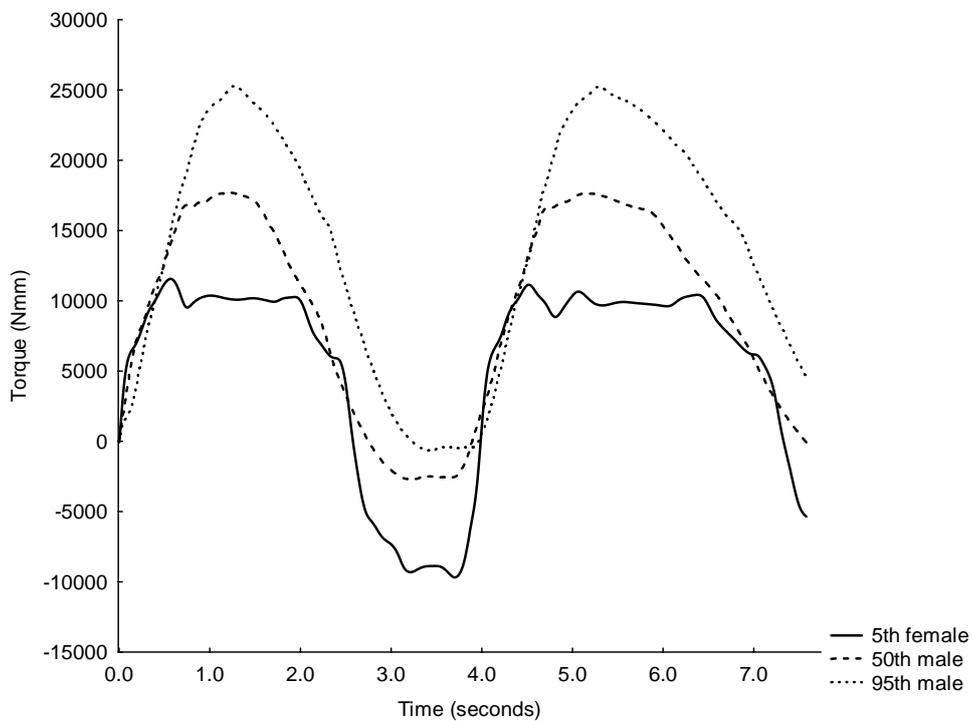


Figure 4. Elbow joint torque (Nmm) for the 3 anthropometric cases (2 repetitions).

Results for the thoracic (T12/L1 intervertebral joint) and lumbar (L5/S1 intervertebral joint) spine compression and anterior/posterior (A/P) shear forces are presented in Tables VII and VIII respectively. Peak thoracic spine joint compression forces were greatest for the 95th percentile male, followed by the 50th percentile male and were lowest in the 5th percentile female. There was a similar trend for the peak lumbar spine joint compression forces except that the 50th percentile male's compression force was slightly higher than the 95th percentile males. In all anthropometric cases the peak lumbar spine joint compression forces were greater than the peak thoracic spine joint compression forces.

Table VII. Thoracic and lumbar spine joint compression forces (N) for the 3 anthropometric cases. Note: positive values indicate forces in a superior direction and negative values indicate forces in an inferior direction.

Musculoskeletal model	Spinal joint	Mean (N)	Min.	Max.
5 th percentile female	Thoracic spine	827.9	-508.2	1774.1
	Lumbar spine	1175.8	-608.0	2337.2
50 th percentile male	Thoracic spine	996.3	-402.0	2123.3
	Lumbar spine	1559.7	-85.4	2920.5
95 th percentile male	Thoracic spine	971.2	-226.0	2133.2
	Lumbar spine	1466.0	-160.7	2821.7

Peak A/P lumbar joint shear forces were greater than peak A/P thoracic joint shear forces for the three anthropometric cases. The 5th percentile female recorded the lowest peak A/P lumbar and thoracic joint shear forces, followed by the 50th percentile male and the 95th percentile male recorded the highest peak shear forces.

Table VIII. Thoracic and lumbar spine joint anterior/posterior (A/P) shear forces (N) for the 3 anthropometric cases. Note: positive values indicate forces in a posterior direction and negative values indicate forces in an anterior direction.

Musculoskeletal model	Spinal joint	Mean (N)	Min.	Max.
5 th percentile female	Thoracic spine	-358.6	-736.8	209.5
	Lumbar spine	461.3	-906.0	179.1
50 th percentile male	Thoracic spine	-402.0	-901.0	223.0
	Lumbar spine	-544.9	-1109.0	117.2
95 th percentile male	Thoracic spine	-440.7	-974.3	138.7
	Lumbar spine	-569.8	-1180.7	96.0

Discussion

The first conclusion that can be drawn from this study is that the LifeModeler™ default model was not adequate to solve the forward dynamics simulations for any of the anthropometric cases. In order to solve this the following adjustments were made to the default model: 1) an increase in the pCSA of the three default elbow flexor muscles, 2) manipulate the muscle origins and insertions and 3) decrease the joint stiffness in the forwards dynamics simulations.

Muscle tension depends on several factors including neural activation, pCSA, muscle architecture and muscle length (Durall, 2004). The pCSA of the BBL, BBS and B muscles had to be increased for all three anthropometric cases by 50% (Table IX). Due to differences in measurement methodology anatomical cross-sectional areas (aCSA) are smaller than pCSAs (Akagi *et al.*, 2009). Despite this difference, the adjustments resulted in significantly larger pCSAs when compared to elbow flexor muscle anatomical cross-sectional area (aCSA) measurements by magnetic resonance imaging (MRI) in young males and females of 182 mm² and 103 mm² respectively (Akagi *et al.*, 2009). These adjustments however were necessary in order to solve the forward dynamics simulations. It is interesting to note that the pCSA area for the 50th percentile male was larger than that of the 95th percentile male for both muscle groups. The apparent reasoning for this discrepancy according to the manufacturers of the software has to do with the proportionality of the volume differences between the two cases. The 95th percentile male is 146mm taller but the increase in body

mass was only 6kg therefore there was approximately a 9% increase in height with only a 9% increase in volume. To keep proportionality, volume should increase three times more than stature. Thus, caution should be employed when using the default model to not assume that a matching anthropometry will result in reliable muscle strength capabilities; this is further complicated by the significant variance in muscular strength between subjects of similar anthropometry due to differences in conditioning levels.

Table IX. Physiological cross-sectional area (pCSA) after adjustments (mm²) for the 3 anthropometric cases.

Musculoskeletal model	Biceps brachii short head	Biceps brachii long head	Brachialis
5 th percentile female	147.2	180.5	116
50 th percentile male	178.7	218.8	139.7
95 th percentile male	177.6	217.4	138.9

The muscle origin and insertion points of the muscles also had to be manipulated in order to increase the moment arm and therefore allow greater torque to be produced around the elbow joint. Considering that the literature suggests considerable individual variation in muscle origin and insertion locations (El-Naggar, 2001; Ramesh *et al.*, 2007) the adjustments were deemed anatomically reasonable. For instance Ramesh (2007) found that the sternocleidomastoid muscle varies much in the extent of the origin from the clavicle. In some cases the clavicular head may be as narrow as the sternal, in others it may be as much as 7.5cm in breadth. Due to this variability in human anatomical structure an individual whose tendons are inserted on the bone further from the joint centre should be able to lift heavier weights because of the longer moment arm (Beachle and Earle 2008). Moment arms for muscles are generally quite small, usually in the order of several centimetres, and change with joint angle. The moment arm of the BB muscle is smallest at the extremes of the elbow joint

range of motion and largest within the midrange. Because moment arm profiles of all flexor muscles are not identical, not all muscles will contribute similarly to the exercise (Reiser *et al.*, 2007). The origin of the BBS muscle was relocated 50mm superiorly and 10mm medially from the default position. While the origin of the BBL muscle was relocated 10mm superiorly and medially from the default position. Insertions of both the heads were moved 20mm distally from the default position. It should be noted that this influenced the contraction results of the muscles and therefore the BBS muscle mean length was longer than the BBL muscle.

Lastly, the joint stiffness was reduced during the forward dynamics simulation only. Joint stiffness during inverse dynamics (default model) simulations is artificially increased solely for the purpose of ensuring high quality kinematics. One could argue that this is a plausible adjustment as in reality healthy joints experience minimal joint stiffness and therefore the joint stiffness was decreased to finite levels through various iterations until acceptable kinematics was achieved. Even after the adjustments the 5th percentile female and the 50th percentile male BBL muscle reached their maximum force production as can be seen in Figure 5. A possible reason for this could be that the biceps curl machine design does not accommodate the anthropometric dimensions of the 5th percentile female and the 50th percentile male as well as that of the 95th percentile male. A discrepancy with regards to the alignment of the elbow joint with the axis of rotation of the lever arm could result in a disproportionately higher relative muscle force production required to overcome the external resistance. This could result in the muscles reaching maximal force production for extended periods of time which is undesirable in terms of muscular injury risk.

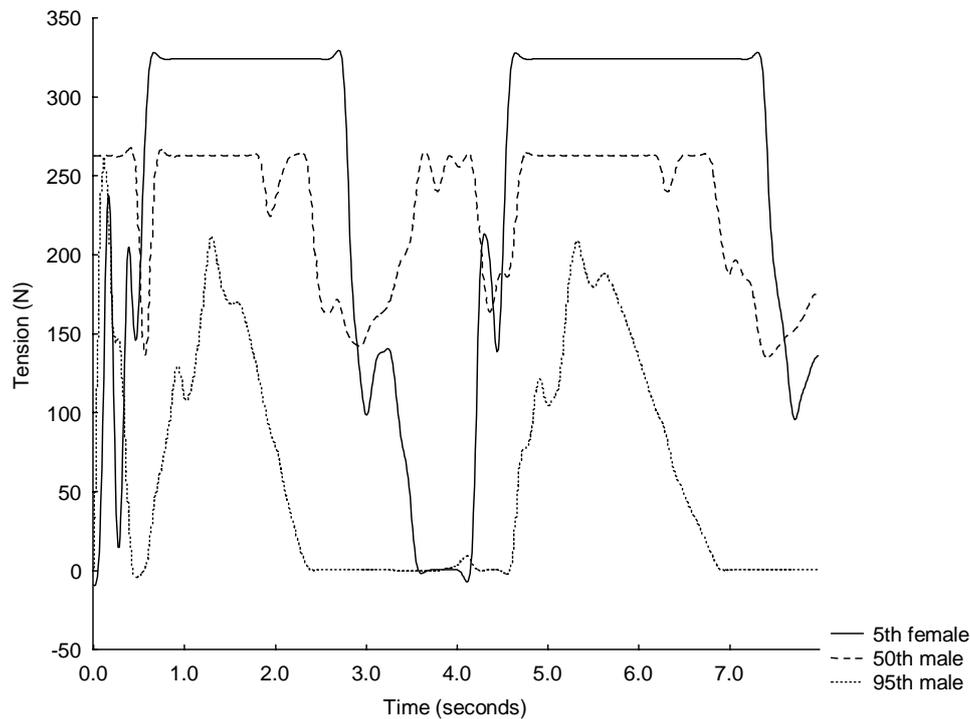


Figure 5. Biceps brachii long head force production (N) for the 3 anthropometric cases (2 repetitions).

The second conclusion of this study was that the software was able to sufficiently indicate anthropometric differences with regards to the biceps curl machine's engineered or manufactured adjustability. The anthropometric dimensions of the musculoskeletal models could be accommodated comfortably in relation to the dimensions and adjustability of the biceps curl machine except for the 5th percentile female (Figure 6). The small female's feet could not reach the ground and her elbow joint could not be aligned properly with the axis of rotation of the machine despite maximum adjustments to the seat. The commercially available machine does not allow for manual adjustability of the preacher curl "platform". However the "platform" had to be adjusted within the modelling environment so that the small female could reach the handle bars of the biceps curl machine. These adjustments to the preacher curl "platform" would not be possible in reality and therefore should be an important design consideration for the manufacturer.

As a result the exercise postures of the 5th percentile female were negatively affected as opposed to the 50th and 95th percentile males. This deficiency in the adjustability of the equipment once again highlights the problem that not all equipment is equally fitted to all individuals and anthropometry differences should be taken into consideration when designing exercise equipment (Hamilton *et al.*, 2009). Furthermore, if an individual is not accommodated appropriately on a piece of equipment exercise technique and posture can be negatively influenced. It was also noted when positioning the musculoskeletal models that the preacher curl “platform” was not parallel with the seat of the biceps curl machine. The fact that the misalignment of the seat and preacher curl “platform” was noted also alludes to the suitability of the modelling for determining such factors.

Lastly, with regards to the biomechanical evaluation in terms of exercise efficacy and injury risk the following could be deduced from the study. The Lifemodeler™ default model consisted only of the BB and B muscles. However, other muscles also play an important role in elbow flexion such as the Brachioradialis muscle (Table X). To truly evaluate exercise efficacy all the important muscles that play a role in the movement should be present. It is possible to add muscles to the default model and then assess their relative contribution to the produced force (as a percentage of their maximal force generating capacity) however this can be time consuming and was not within the scope of this study. In addition, comparisons should be made between variations in technique as well as different manufacturer’s equipment for the same exercise in order to make an informed evaluation of the piece of equipment. The study did however show that the force production was greater for the BBS and BBL in comparison with the B muscle. Furthermore, the 5th percentile females force production for all studied muscles was the greatest in comparison with the other anthropometric cases. This result is not unexpected as anatomical differences could be the reason for the greater force production in the small female such as a smaller lever arm, even although the resistance used for

all three cases was proportionally calculated to correlate the anthropometric dimensions.

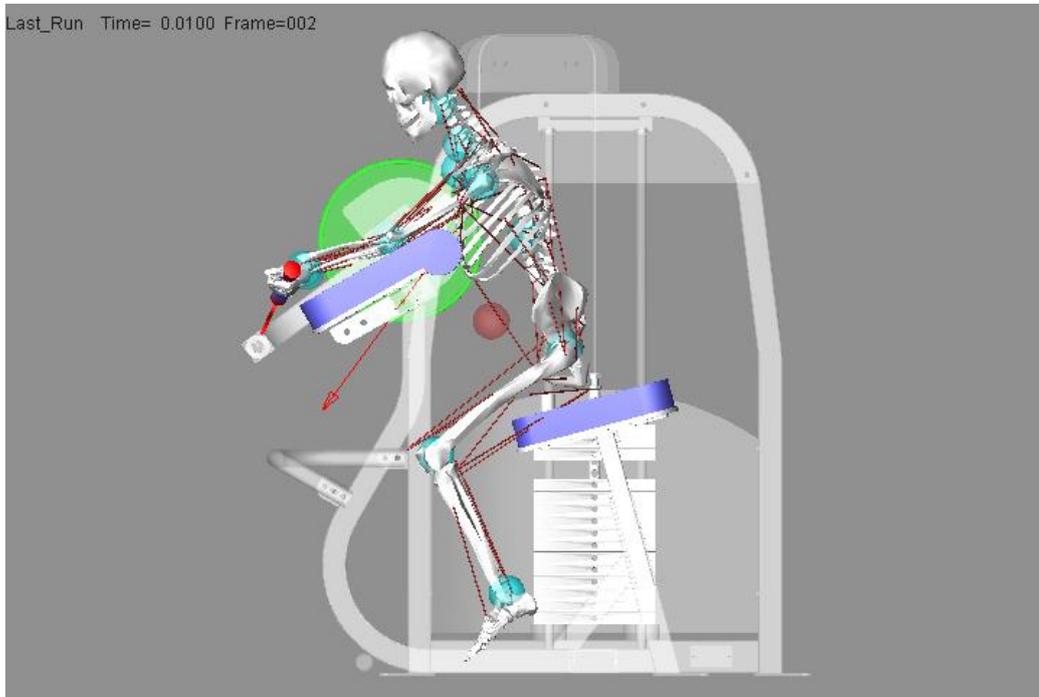


Figure 6. 5th percentile female's positioning on the seated biceps curl machine.

Table X. Biceps curl movement analysis (Floyd, 2009). Note: *primary elbow flexor muscle omitted from the default LifeModeler model.

Joint	Lifting phase to flexed position		Lowering phase to extended position	
	Action	Agonists	Action	Agonists
Wrist and hand	Flexion	Wrist and hand flexors (isometric contraction)	Flexion	Wrist and hand flexors (isometric contraction)
		Flexor carpi radialis		Flexor carpi radialis
		Flexor carpi ulnaris		Flexor carpi ulnaris
		Palmaris longus		Palmaris longus
		Flexor digitorum profundus		Flexor digitorum profundus
		Flexor digitorum superficialis		Flexor digitorum superficialis
Elbow	Flexion	Elbow flexors (Concentric contraction)	Extension	Elbow flexors (eccentric contraction)
		Biceps brachii		Biceps brachii
		Brachialis		Brachialis
		*Brachioradialis		*Brachioradialis
		Pronator teres		Pronator teres

The joint torque values obtained for the wrist and elbow appear to be plausible when comparing the values to peak values obtained by means of isokinetic testing bearing in mind that the values obtained in this study were not from maximal tests. For example wrist flexion/extension values of 13.8 Nm and 12.7 Nm respectively at 60 degrees per second in non-disabled subjects (Van Swearingen, 1983) and elbow flexion/extension values of 36 Nm for both elbow flexion and extension at 60 degrees per second in female college basketball players (Berg *et al.*, 1985). Joint torque values for the elbow joints were higher than that of the wrist joints and the joint torques produced were also appropriate to the size of the anthropometric cases since torque can be quantitatively defined as the magnitude of a force multiplied by the length of its moment arm (Beachle and Earle, 2008). The results also indicate that as the sagittal elbow joint angle decreased the elbow joint torque increased. Muscle can produce maximum tension at or near their resting length because the greatest numbers of actin and myosin bonds are formed when the muscles are at this length. The resting position of the biceps brachii would theoretically occur when the elbow is bent

roughly 75 degrees because the total arc of movement at the elbow is roughly 150 degrees, Thus, at 75 degrees of elbow flexion, the biceps brachii is midway between fully elongated and fully shortened (Durall, 2004). Interestingly in this study, the maximum joint elbow torques were reached at joint angles between approximately 55 degrees (5th percentile female) and 85 degrees (95th percentile male) (Figure 3). This corresponds favourably with the literature's proposal of 75 degrees. The maximum elbow torque production for all three anthropometric cases was at approximately 1.6 s and 5.6 s (Figure 4) which appears to correspond with the shortest BBL contraction (Figure 2). Although these results may appear contradictory it must be noted that the peak joint torques were reached with the muscles close to their shortest length during the exercise period which was indeed very close to the natural resting lengths for BB muscles and not necessarily equal to the shortest anatomical length of the muscle during the full range of motion of the joint.

While the differences in absolute muscle contractions (Table V) are to be expected Figure 7 indicates that relative muscle contraction as a percentage of starting muscle length was similar for the males but slightly less for the female. It could indicate that her range of motion might have been less during the forward dynamics simulation when compared to that of the two male models.

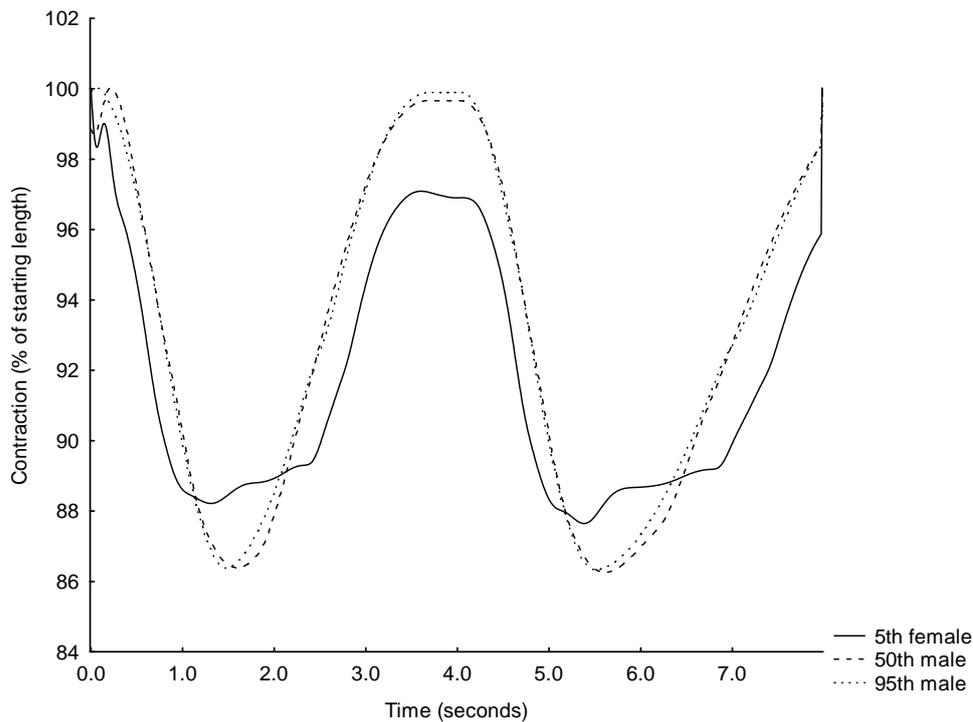


Figure 7. Biceps brachii long head contraction (mm) as a percentage of starting length for the 3 anthropometric cases (2 repetitions).

There are three load types: compression, tension, and shear. Tensile loads tend to pull the ends of a body apart, compressive loads tend to push the ends together, and shear loads tend to produce horizontal, or parallel, sliding of one layer over another (Whiting and Zernicke, 2008). In terms of risk assessment of musculoskeletal injury it was important to evaluate the compression and A/P shear forces of the thoracic and lumbar spine as the back is a common area for injury during exercise. In addition there is research that exists regarding the maximum recommended limits when performing various tasks thus making comparisons between recorded values and recommended limits possible. It is important to bear in mind when making this analysis and applying the information that the spine of the default model does not consist of all the individual vertebrae but rather of various segments that represent the different regions of the vertebral column with joints between these segments. Individualised vertebra and corresponding joints might produce different results.

Previous research from the American National Institute for Occupational Safety and Health (NIOSH) recommends that spinal compression forces should not exceed 3.4 kN to avoid injury. However there is a very real threat of musculoskeletal injury before this failure limit value has been reached (Snook and Ciriello, 1991; Cooper and Ghassemieh, 2007; Knapik and Marras, 2009). British standards (BS EN 1005-3, 2002) recommend 600 N as the cut-off point for carrying masses, no further recommendations except “time of exposure needs to be minimised” and “a preferred system requires optimal ergonomic position with reduced back bending posture” are made. All three anthropometric cases were below the recommended failure limit of 3.4 kN however were above 600 N and therefore could still be putting them at risk for injury.

The thoracic spine joint A/P shear forces for the three anthropometric cases are below the most commonly cited spine tolerance of 1000 N for shear force as stipulated by McGill (1996). However this was not the case for the lumbar spine joint A/P shear forces, the male anthropometric cases were both above 1000 N and the 5th percentile female was slightly below. Furthermore, the lumbar spine joint A/P shear forces were greater than the thoracic spine joint A/P shear forces for all the anthropometric cases.

It is important to note that although the compression (thoracic and lumbar spine) and thoracic spine joint A/P shear forces recorded were within the acceptable limits the modelling does not take into account the repetitive nature and accumulative effect of exercise. Furthermore, the resistance used was only 50% of each of the anthropometric cases' estimated 1RM and therefore if exercisers use a resistance closer to their maximum the loading values may exceed the acceptable limits. The modelling also does not take into consideration varying training status or muscular strength and endurance of individuals which could either increase or decrease the individuals risk for injury depending on which side of the continuum they find themselves. Core musculature also plays an important role in protecting exercisers especially the back during training which is also not

taken into account. The core can be defined as the lumbo-pelvic-hip complex. The core is where the centre of gravity is located and where all movement begins (Prentice, 2010a). The core operates as an integrated functional unit whereby the entire kinetic chain works synergistically to produce force, reduce force, and dynamically stabilize against abnormal force. In an efficient state, each structural component distributes weight, absorbs force, and transfers ground reaction forces (Prentice, 2010b).

While limited data exists on safe muscle tension values, due to large individual variability, the results of the muscle tensions for the 5th percentile female and 50th percentile male indicate that one of the prime movers of the elbow were strained above its maximum calculated capacity for extended periods during the exercise. This should be deemed to be a high risk for muscular injury during the exercise.

Conclusion

The 3D musculoskeletal modelling was able to indicate interesting design elements and flaws as well as biomechanical and anthropometrical limitations of the evaluated seated biceps curl resistance training machine. It has therefore once again been demonstrated that the anthropometric dimensions of the end-user must be taken into account when designing exercise equipment. It must be noted however, contrary to what was expected poor positioning of the small female did not appear to put her at increased risk for injury in comparison to the other two anthropometric cases who were adequately accommodated by the biceps curl resistance training machine. High recorded lumbar spine A/P shear forces for the three anthropometric cases and maximum muscle tensions for the female and 50th percentile male indicate that the seated biceps curl exercise may pose a risk for injuries. 3D musculoskeletal modelling can certainly be used to evaluate resistance training equipment design however the limitations as indicated by this study must be taken into consideration especially when using default models lacking adequate bio-fidelity. Mathematical and computer modelling is continually being improved and thus the limitations will hopefully be

addressed thus making the process of 3D musculoskeletal modelling more user-friendly and effective in evaluating various pieces of equipment and thus ensuring the safety and efficacy of the exercise for the end-user. Unfortunately, currently it is still a fairly time consuming procedure requiring a process of many iterations in order to perform the modelling and provide plausible results. However an important benefit of 3D musculoskeletal modelling that should not be forgotten is fact that it is a relatively inexpensive manner of evaluating resistance training equipment design and can be performed without putting the subject at risk of injury.

References

Akagi, R., Takai, Y., Ohta, M., Kanehisa, H., Kawakami, Y., and Fukungaga, T. (2009). Muscle volume compared to cross-sectional area is more appropriate for evaluating muscle strength in young and elderly individuals. *Age and Ageing*, **38**, 564 – 569.

Alexander, R. McN. (2003). Modelling approaches in biomechanics. *Philosophical Transactions of the Royal Society*, **358**, 1429 – 1435.

Annegarn, J., Rasmussen, J., Savelberg, H.H.C.M., Verdijk, L.B., and Meijer, K. (2007) (accessed 2008). *Scaling strength in human simulation models*. www.anybodytech.com.

Agnesina, G., Taiar, R., Havel, N., Guelton, K., Hellard, P., and Toshev, Y. (2006). BRG.LifeMOD™ modeling and simulation of swimmers impulse during a grab start. *Proceedings of the 9th Symposium on 3D Analysis of Human Movement*. Valenciennes.

Beachle, T.R., and Earle, R.W. (2008). *Essentials of Strength Training and Conditioning*. Champaign: Human Kinetics.

Berg, K., Blank, D., and Muller, M. (1985). Muscular fitness profile of female college basketball players. *Journal of Orthopaedic and Sports Physical Therapy*, **7**, 59 – 64.

Biomechanics Research Group, Inc. (2006). *LifeMOD biomechanics modeler Manual*.

Bredenkamp, K. (2007). The characterisation of the male and female body forms of the SANDF. *ERGOTECH Document P0683/2007/01*. Centurion: ERGOnomics TECHNOlogies. South Africa.

BS EN 1005 – 3: 2002. *Safety of machinery – Human physical performance – Part 3: Recommended force limits for machinery operations*. London: British Standards Institute.

Cooper, G., and Ghassemieh, E. (2007). Risk Assessment of patient handling with ambulance stretcher systems (ramp / winch), easy-loader, tail-lift using biomechanical failure criteria. *Medical Engineering & Physics*, **29**, 775 – 787.

Dabnichki, P. (1998). Biomechanical testing and sport equipment design. *Sports Engineering*, **1**, 93 – 105.

De Jongh, C. (2007). *Critical Evaluation of Predictive Modelling of a Cervical Disc Design*, Unpublished Masters thesis, University of Stellenbosch.

Durall, C. (2004). Injury risk with the horizontal arm curl: biomechanical and physiological considerations. *National Strength and Conditioning Association*, **26** (2), 52 – 55.

El-Naggar, M.M. (2001). A study on the morphology of the coracobrachialis muscle and its relationship with the musculocutaneous nerve. *Folia Morphology*, **60** (3), 217-224.

Fleck, W.J., and Kraemer, S.J. (1997). *Designing resistance training programs*. Champaign: Human Kinetics.

Floyd, R.T. (2009). *Manual of structural kinesiology* (17th Ed). New York: McGraw-Hill.

Gordon, C.C., and Brantley, J.D. (1997). Statistical modelling of population variation in the head and face. *The design and integration of helmet systems International Symposium Proceedings*. Massachusetts, USA.

Hamilton, N., Weimar, W., and Luttgens, K. (2009). *Kinesiology: scientific basis of human motion* (11th Ed). New York: McGraw-Hill.

Hofmann, M., Danhard, M., Betzler, N., Witte, K., and Edelmann, J. (2006). Modelling with BRG.lifeMODTM in sport science. *International Journal of Computer Science in Sport*, **5**.

Howley, E.T. (2007). *Fitness professional's handbook* (5th Ed.). Champaign: Human Kinetics.

Kazlauskienė, K. (2006). *Design and research of biomechanical models of human with joint replacements*, Unpublished Doctoral Thesis, Kaunas University of Technology.

Kenny, I.C., Wallace, E.S., Brown, D., and Otto, S.R. (2005). *Validation of a Full-Body Computer simulation of the Golf Drive for Clubs of Differing length*. University of Ulster: R & A Limited.

Knapik, G.G., and Marras, W.S. 2009. Spine loading at different lumbar levels during pushing and pulling. *Ergonomics*, 52(1): 60-70.

Lou, S.L., Chen, Y.C., You, J.Y., and Hsu, C.K. (2007). Functional evaluation of elliptical trainer with human motion analysis, *Proceedings of 2007 International Society of Biomechanics Conference*, Taiwan.

McGill, S.M. (1996). Searching for the safe biomechanical envelope for maintaining healthy tissue, Pre-Meeting workshop, *International Society for the Study of the Lumbar Spine: The Contribution of Biomechanics to the prevention and treatment of low back pain*, University of Vermont, June 25.

Oliveira, L.F., Matta, T.T., Alves, D.S., Garcia, M.A.C., and Vierra, T.M.M. (2009). Effect of the shoulder position on the biceps brachii EMG in different dumbbell curls. *Journal of Sports Science and Medicine*, **8**, 24 – 29.

Olesen, C.G., Andersen, M.S., Rathleff, M.S., de Zee, M., and Rasmussen, J. (2009). Understanding the biomechanics of medial tibial stress syndrome – A simulation study using a musculoskeletal model. *Proceedings of the 2009 International Society of Biomechanics*. Cape Town.

Prentice, W.E. (2010a). *Rehabilitation techniques for sports medicine and athletic training*. New York: McGraw-Hill.

Prentice, W.E. (2010b). *Essentials of athletic injury management* (8th Ed.). New York: McGraw-Hill.

Ramesh, R.T, Vishnumaya, G., Prakashchandra, S.K. and Suresh, R. (2007). Variations in the origin of sternocleidomastoid muscle. *International Journal of Morphology*, **25**(3), 621-623.

Rasmussen, J., de Zee, M., Damsgaard, M., Christensen, S.T., Marek, C. and Siebertz, K. (accessed 2008). *A general method for scaling musculo-skeletal models*. www.anybodytech.com.

Reiser, R.F., Mackey, D.T., and Overman, J.W. (2007). Between the beginning and end of a repetition: How intrinsic and extrinsic factors influence the intensity of a biceps curl. *National Strength and Conditioning Association*, **29**, 64 – 76.

Rietdyk, S., and Patla, A.E. (1999). Context-dependent reflex control: Some insights into the role of balance. *Experimental Brain Research*, **119**, 251 – 259.

RSA-MIL-STD-127. (2004). Ergonomic design: anthropometry and environment. *RMSS Document*, **1**, 1 – 196.

RSA-MIL-STD-127. (2001). Ergonomic design: Biomechanics – specific functional body strength data standard. *RMSS Document*, **5**, 1 – 28.

Schillings, A.M., Van Wezel, B.M., and Duysens, J. (1996). Mechanically induced stumbling during human treadmill walking. *Journal of Neuroscience Methods*, **67**, 11 – 17.

Snook, S.H., and Ciriello, V.M. (1991). The design of manual handling tasks: revised tables of maximum acceptable weights and forces. *Ergonomics*, **34**: 1197-1213.

Van Swearingen, J.M. (1983). Measuring wrist muscle strength. *Journal of Orthopaedic and Sports Physical Therapy*, **4**, 217 – 228).

Vaughn, C.L. (1989). *Biomechanics of sport*. Florida: CRC Press.

Whiting, W.C., and Zernicke, R.F. (2008). *Biomechanics of Musculoskeletal Injury* (2nd Ed). Champaign: Human Kinetics.

CHAPTER 4

THREE DIMENSIONAL MUSCULOSKELETAL MODELLING OF THE ABDOMINAL CRUNCH RESISTANCE TRAINING EXERCISE FOCUSING ON THE BIOMECHANICAL AND ANTHROPOMETRIC CONSIDERATIONS OF THE END-USER

Kim Nolte¹, Pieter E. Krüger¹, & P. Schalk Els²

¹*Department of Biokinetics, Sport and Leisure Sciences, University of Pretoria, Pretoria, South Africa,* ²*Department of Mechanical and Aeronautical Engineering, University of Pretoria, Pretoria, South Africa*

Abstract

The aim of this study was to evaluate whether three dimensional (3D) musculoskeletal modelling could be effective in assessing the safety and efficacy of exercising on an abdominal crunch resistance training machine. The focus of the evaluation was on biomechanical and anthropometric considerations of the end-user. Three anthropometric cases were created; these represented a 5th percentile female as well as a 50th and 95th percentile male based on body mass index (BMI). Resistance on the abdominal crunch machine was set at fifty percent of peak isokinetic force (trunk flexion/extension) for each anthropometric case, four repetitions were performed. Results indicated that the default model of the LifemodelerTM software was reasonably successful in evaluating the abdominal crunch resistance training exercise. No adjustments had to be made to the default model in order to solve the forward dynamics simulations. The modelling was able to indicate high risk for back injury when performing the abdominal crunch exercise as a result of the unacceptable intervertebral joint loading that occurs during the exercise. Individuals with small anthropometric dimensions such as some females and children cannot be accommodated suitably on the abdominal crunch resistance training machine which negatively impacts exercise posture and technique. Hip flexor muscle contribution in the

execution of the exercise for the 5th percentile female was substantial thus reducing the efficacy of the exercise in isolating the abdominal muscles.

Keywords: *Resistance training equipment, abdominal crunch, biomechanics, anthropometric, modelling, LifemodelerTM, inverse dynamics, forward dynamics*

Introduction

This article constitutes the second article in a series of four. The series consists of three dimensional (3D) musculoskeletal modelling with a focus on biomechanical and anthropometric variables of four commonly used pieces of resistance training equipment. Participation in physical activity is encouraged by government agencies and physical activity experts because participation provides health, physical, mental, social, and economic benefits to the individual and community (Dennis and Finch, 2008). The increased popularity of, and participation in resistance training worldwide is indicative of the level of interest in benefits derivable from this type of training (Vaughn, 1989; Lou *et al.*, 2007). Ironically, participation in any type of physical activity places the exerciser in situations in which injury is likely to occur. Improvement in exercise equipment design could reduce these hazards and therefore reduce the risk of injury (Dabnichki, 1998) as well as possibly increase the efficacy of the exercise. This study presents the musculoskeletal modelling of three anthropometric cases while exercising on a commercially available seated abdominal crunch resistance training machine. Thus, the primary aim of this study was to determine the efficacy of 3D musculoskeletal modelling in evaluating the abdominal crunch resistance training machine.

The abdominal muscles are the major supporting muscles for the stomach area. They not only support and protect internal organs, but they aid the muscles of the lower back to properly align and support the spine for proper posture as well as in lifting activities (Beachle and Groves, 1992). The abdominals operate as an integrated functional unit, which helps maintain optimal spinal kinematics. When working efficiently, the abdominals offer sagittal, frontal, and transverses plane stabilization by controlling forces that reach the lumbo-pelvic-hip complex (Prentice, 2010). The abdominal wall muscles are different from other muscles, they do not go from bone to bone but attach onto an aponeurosis (fascia) around the rectus abdominis area. They are the external oblique abdominal, internal oblique abdominal, and transversus abdominis (Floyd, 2009). There are several

exercises for the abdominal muscles, such as bent-knee sit-ups, crunches, isometric contractions as well as exercises using specialized equipment and resistance training machines (McGill, 1995; Nieman, 2007). Controversy remains as to which exercise method best activates the muscles of the abdomen and minimizes potentially harmful or excessive joint tissue loading (McGill, 1995). A variety of selected abdominal exercises are required to sufficiently challenge the abdominal muscles and that these exercises will differ to best meet the different training objectives of the individual (Axler and McGill., 1997).

Methods

Equipment

A 3D musculoskeletal full body model was created using LifeModeler™ software and incorporated into a multibody dynamics model of the abdominal crunch machine modelled in MSC ADAMS (Figure 1). The LifeModeler™ software runs as a plug-in on the MSC ADAMS software. LifeModeler™ software has previously been used in studies in the fields of sport, exercise and medicine (Schillings *et al.*, 1996; Rietdyk and Patla., 1999; Hofmann *et al.*, 2006; Agnesina *et al.*, 2006; De Jongh, 2007; Olesen *et al.*, 2009). It was decided to evaluate a default model as generated through the software. This model consists of 19 segments including a base set of joints for each body region. Specifically, the spine does not consist of individual vertebrae but rather of various segments that represent different regions of the vertebral column with joints between these segments. The default model has a full body set of 118 muscle elements attached to the bones at anatomical landmarks, which includes most of the major muscle groups in the body. Closed loop simple muscles were modelled. Closed loop muscles contain proportional-integral-differential (PID) controllers. The PID controller algorithm uses a target length-time curve to generate the muscle activation and the muscles follow this curve. Because of this approach, an inverse dynamics simulation using passive recording muscles is required prior to simulation with closed loop muscles. Simple muscles fire with no constraints

except for the physiological cross-sectional area (pCSA), which designates the maximum force a muscle can exert. The graphs of simple muscle activation curves will generally peak at a flat force ceiling value (Biomechanics research group, 2006).

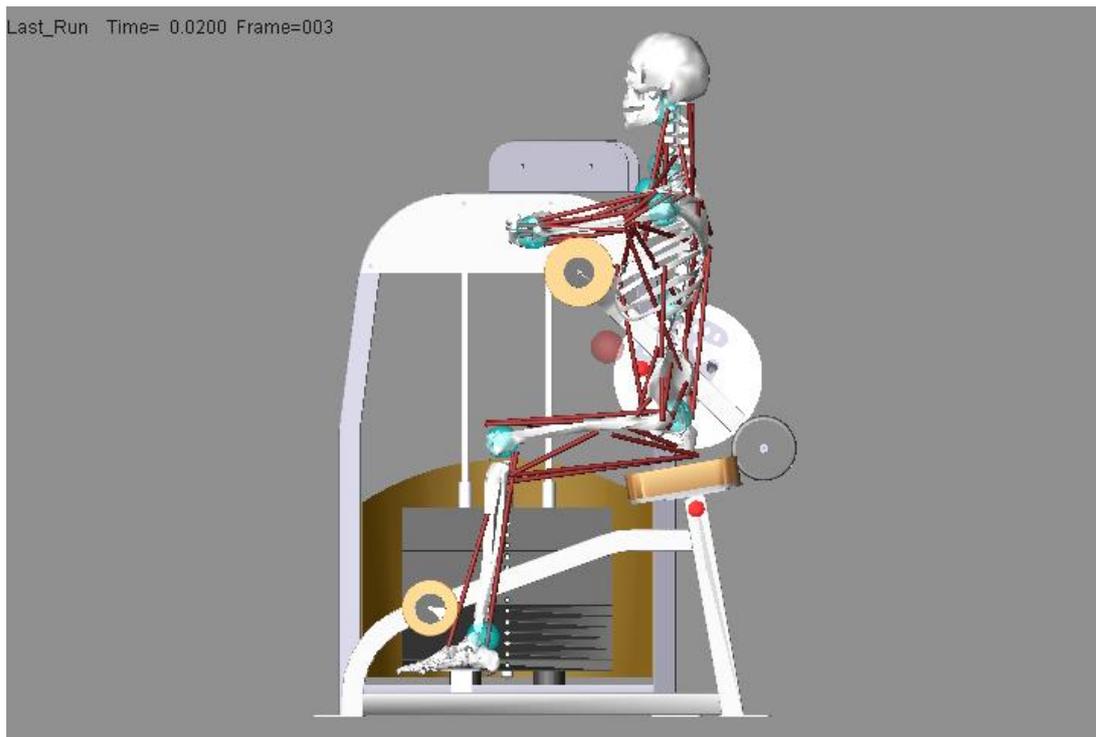


Figure 1: 3D musculoskeletal modelling of the abdominal crunch resistance training machine and 95th percentile male musculoskeletal model using LifeModeler™ and MSC ADAMS software.

Musculoskeletal full body human and the abdominal crunch computer aided design (CAD) models

Three anthropometric cases were created for each piece of equipment. The human models were created using the GeBOD anthropometry database (default LifeModeler™ database) but were based on body mass index (BMI) data obtained from RSA-MIL-STD 127 Vol 1 (2004). This standard is a representative anthropometry standard of the South African National Defence Force (SANDF)

which is kept current by a yearly sampling plan and is an accurate representation of the broader South Africa population. Bredenkamp (2007) described a process to characterize the body forms of SANDF males and females. Body form variances described by two principle components (PC's) for the SANDF males and two PC's for SANDF females were included in the modelling process. Positive and negative boundary cases of each PC, representing the boundary conditions to be accommodated in design (Gordon and Brantley, 1997), identified the total range of four male and four female models. It was decided to use the cases representing the smallest female as well as an average and large male for the three anthropometric cases for this study. These cases could be seen as what are traditionally known as a 5th percentile female, 50th percentile male and a 95th percentile male based on the BMI of each of these cases. Thus, for the purpose of building these biomechanical models, a correlation between BMI and functional body strength was assumed. Similar assumptions have previously been made in biomechanics full body model simulations (Rasmussen *et al.*, 2007). A study by Annegarn *et al.* (2007) also verified scaled modelling strengths against actual functional body strengths and correlations ranged from 0.64 to 0.99.

This approach was followed in order to ensure that the equipment can accommodate an acceptable sample of the South African end-user population. A CAD model of the abdominal crunch resistance training machine was obtained from a South African exercise equipment manufacturing company. The model in a Parasolid file format was imported into the LifeModeler™ simulation software.

The Adams software was used to create two design variables in order to adjust the external resistance (as selected by the amount of weights when using a selectorised resistance training machine) and to specify the radius of the cam over which the cable of an actual exercise machine would run in order to lift the selected resistance. This was possible since this machine employed a circular cam system however, this would not be possible with exercise machines employing non-circular cam systems, in order to attain better mechanical

advantage for the end-user. A special contact force (solid to solid) was created between the weights being lifted and the remainder of the weight stack during the simulation. A coupler joint was created linking the revolute joint (driver) of the lever arm attached to the abdominal crunch machine pad/cushion with the translational joint of the weight stack. The design variable created for the radius of the cam was referenced as the scale of the coupled joint (translational joint at weights). The design variable created for the mass of the weights was then adjusted according to the pre-determined resistance for each anthropometric case.

The external resistance applied in the models was based on data obtained from Isokinetic testing results from trunk flexion (Perrin, 1993). Trunk flexion was selected as it most closely resembles the abdominal crunch movement. Torque (Nm) values obtained were converted to force values in Kilograms by adjusting for estimated lever length of the trunk of each anthropometric case. Fifty percent of the functional strength one repetition maximum (1RM) for each anthropometric case was used as this can be considered a manageable resistance to perform an exercise with appropriate form and technique for four repetitions.

Simulation

Extreme care was taken with the positioning of the musculoskeletal model onto the abdominal crunch machine to ensure technique, posture and positioning was correct according to best exercise principles (Table I). Furthermore, total manufacturer adjustability of the exercise machine was used in order to ensure correct positioning for each of the anthropometric cases. The following steps were performed in order to ensure realistic kinematics during the inverse dynamics simulations: 1) Positioning of the human model on the exercise equipment, 2) Adjustment of the posture to allow for the human machine interface to be created, 3) Creating the constraints between the human and machine, 4) Prescribing the motion of the repetitions, 5) Evaluation of the resultant kinematics, 6) Adjustment of joint positions until inverse dynamics

resulted in a realistic exercise movement. A bushing element was applied between the lower torso and the seat of the abdominal crunch machine as well as the two humeral bones and the abdominal crunch machine pad/cushion. Bushing elements were preferred to fixed joint elements because it allows for limited translational and rotational motion. Also, the amount of motion can be controlled by changing stiffness and damping characteristics in all three orthogonal directions.

The inverse dynamics – forward dynamics method was applied during the simulations. Inverse dynamics simulations are performed on models which are being manipulated by the use of motion agents or motion splines. During the inverse dynamics simulation, a rotational motion was applied to the revolute joint of the lever arm attached to the pad/cushion of the abdominal crunch machine in order to generate the required movement of the resistance training machine. This movement replicated the pulling (concentric) and resisting (eccentric) phase of the exercise. The time for the concentric phase was set at 1.33 seconds and the eccentric phase longer at 2.66 seconds to mimic conventional resistance training technique in which the downward phase is more deliberate to prohibit the use of momentum. The 1.33 second concentric phase included a STEP function approximation over 0.5 seconds to ensure a gradual start to the movement. The muscles of the model were trained during the inverse dynamics simulation in order to calculate the changes in muscle lengths to result in the required machine movement.

After the inverse dynamics simulation was performed, the rotational motion was removed from the rotational joint of the lever arm of the abdominal crunch machine. The recorded muscle length changes and resulting joint movements were then used to drive the model during the forward dynamics simulation in the manner as developed through the inverse dynamics simulation. During the forward dynamics simulation the model is guided by the internal forces (muscle

length changes resulting in joint angulations and torques) and influenced by external forces (gravity, contact and determined exercise resistance).

Table I. Exercise starting posture for the 3 anthropometric cases on the abdominal crunch machine. Results are presented for the sagittal, transverse and frontal planes (degrees). Note that F = flexion, E = extension, and AB = abduction.

Joint	5 th percentile female	50 th percentile male	95 th percentile male
Scapula	0.0; 0.0; .0.0	0.0; 0.0; 0.0	0.0; 0.0; 0.0
Shoulder	82.0(F); 0.0; 0.0	78.0(F); 0.0; 0.0	78.0(F); 0.0; 0.0
Elbow	90.0(F); 0.0; 90.0(F)	90.0(F); 0.0; 90.0(F)	90.0(F); 0.0; 90.0(F)
Wrist	0.0; 0.0; 0.0	0.0; 0.0; 0.0	0.0; 0.0; 0.0
Hip	40.0(F); 0.0; 7.0(AB)	63.0(F); 0.0; 7.0(AB)	77.0(F); 0.0; 7.0(AB)
Knee	20.0(F); 0.0; 0.0	55.0(F); 0.0; 0.0	70.0(F); 0.0; 0.0
Ankle	8.0(E); 0.0; 0.0	8.0(E); 0.0; 0.0	8.0(E); 0.0; 0.0
Upper neck	0.0; 0.0; .0.0	0.0; 0.0; 0.0	0.0; 0.0; 0.0
Lower neck	0.0; 0.0; .0.0	0.0; 0.0; 0.0	0.0; 0.0; 0.0
Thoracic	0.0; 0.0; .0.0	0.0; 0.0; 0.0	0.0; 0.0; 0.0
Lumbar	0.0; 0.0; .0.0	0.0; 0.0; 0.0	0.0; 0.0; 0.0

Data analysis

The anthropometric dimensions and exercise postures of the musculoskeletal human models were visually assessed in relation to the dimensions and adjustability of the resistance training equipment in order to determine if all three anthropometric cases representative of the South African end-user population could comfortably be accommodated on the abdominal crunch resistance training machine. Key aspects included start and end exercise posture as well as maintaining correct technique throughout the exercise during the simulations. Start and end exercise posture evaluation entailed positioning of the axilla and upper arms (humerus) on the top of the abdominal crunch pad touching the chest at the sternum. The feet are supposed to be positioned on the provided supports with the hips flexed in order to protect the lower lumbar area from excessive strain during the exercise. Correct technique was assessed in terms of limited compensatory movements and performing the abdominal crunch through the full range of motion as determined by the inverse dynamics.

The kinematic and kinetic data from the simulations were analysed specifically in terms of peak muscular force production of the prime movers of the abdominal crunch exercise. Thus for the purpose of this study, efficacy of the equipment was assessed by evaluating whether the equipment exercised the muscles it was designed for, does the abdominal crunch machine exercise the primary abdominal muscles? Furthermore, the risk of injury to the musculoskeletal system of the exerciser was ascertained by comparison of measured forces with safe loading limits for joints of the lumbar and thoracic spine. Risk to both these structures are real especially during exercises that require spinal flexion and extension (with and without resistance) and or during execution of exercise with poor postures.

Due to the nature of this study only basic descriptive statistics were performed by means of the STATISTICA© software package (Statsoft).

Results

Table II presents the body mass and stature of the three anthropometric cases based on BMI data obtained from RSA-MIL-STD 127 Vol 1 (2004). Table III presents the external resistance the models had to overcome during the forward dynamics simulations, fifty percent of the functional strength 1RM for each anthropometric case was used for four repetitions.

Table II. Anthropometric details of population groups studied.

User population group	Body mass (kg)	Stature (mm)
5 th percentile female	49.5	1500
50 th percentile male	65.0	1720
95 th percentile male	85.0	1840

Table III. User population strength data.

User population group	User population group exercise resistance (50% 1RM) kg
5 th percentile female	5
50 th percentile male	14
95 th percentile male	24

Muscle force production (N) and contraction (shortening and lengthening) (mm) for the right side are reported on. Theoretically, the results of the left and right side should be similar.

Force production (N) of the Erector spinae (ER), Rectus abdominis (RA), Oblique (O) as well as the hip flexor [Psoas major (PM) and Iliacus (I)] muscles are presented in Tables IV and V, respectively. Maximum force production was greatest for the O muscle in comparison to the RA muscle for all three anthropometric cases (Figure 2). The 5th percentile female exerted the most force for all muscles analysed and the 50th percentile male the least, with the exception of the ES muscle which was slightly higher for the 50th percentile male in comparison with the 95th percentile male. The hip flexor muscles were only used by the 5th percentile female, specifically the PM muscle.

Table IV. Right Erector spinae, Rectus abdominis and Internal and External oblique muscles force production (N) results for the 3 anthropometric cases.

Musculoskeletal model	Muscles	Mean (N)	Min.	Max.
5 th percentile female	Erector spinae (ES)	24.5	-9.0	225.0
	Rectus abdominis (RA)	266.5	-21.0	667.0
	Oblique (O)	611.8	-58.0	1764.0
50 th percentile male	Erector spinae (ES)	126.3	-12.0	342.0
	Rectus abdominis (RA)	8.5	-2.0	186.0
	Oblique (O)	97.5	-14.0	503.0
95 th percentile male	Erector spinae (ES)	121.6	-11.0	340.0
	Rectus abdominis (RA)	12.0	-3.0	241.0
	Oblique (O)	127.0	-17.0	618.0

Table V. Right Psoas major and Iliacus (hip flexors) muscle force production (N) results for the 3 anthropometric cases.

Musculoskeletal model	Muscles	Mean (N)	Min.	Max.
5 th percentile female	Psoas major (PM)	504.7	-53.0	1627.0
	Iliacus (I)	0.4	0.4	0.4
50 th percentile male	Psoas major (PM)	0.4	0.3	0.5
	Iliacus (I)	0.4	0.4	0.4
95 th percentile male	Psoas major (PM)	0.4	0.4	0.4
	Iliacus (I)	0.4	0.4	0.4

Absolute muscle contraction (shortening and lengthening) (mm) results are presented in Table VI. The mean muscle contraction length for the ES, RA and O is greatest for the 95th percentile male and smallest for the 5th percentile female. The reverse is true for the PM and I muscles as the 5th percentile female measured the greatest mean muscle contraction lengths. The mean muscle length is highest for the RA muscle in comparison with the O muscle and a similar trend was found with the PM muscle in comparison with the I muscle for the three anthropometric cases.

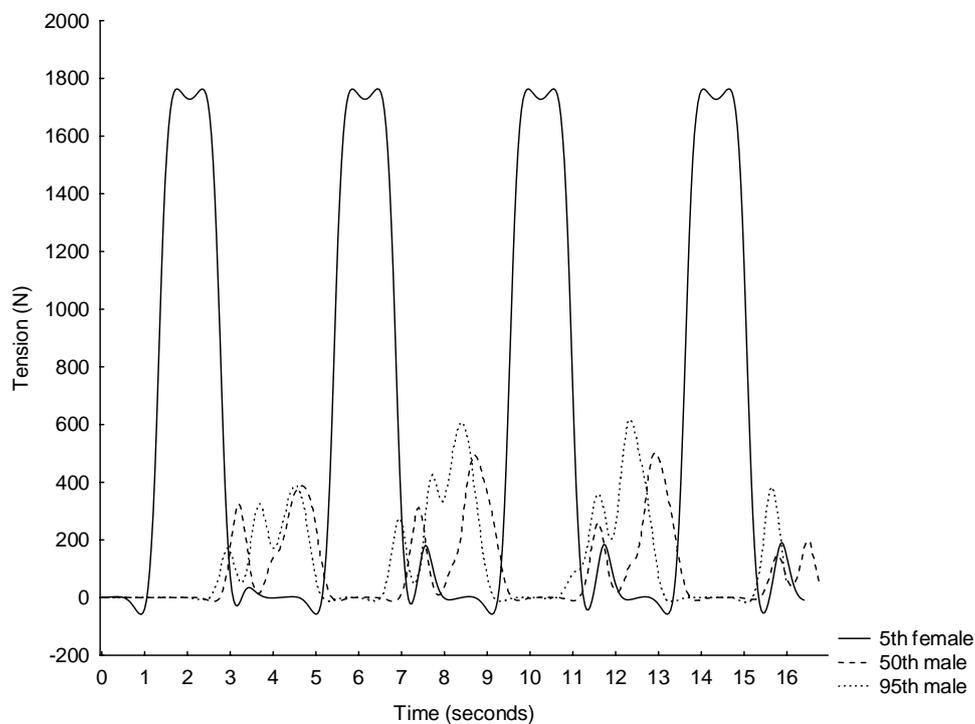


Figure 2: Right Oblique muscle force (N) for the 3 anthropometric cases (4 repetitions).

Due to the involvement of the spinal column in the abdominal crunch exercise, torque (Nm) for the T12/L1 intervertebral joint (thoracic) and the L5/S1 intervertebral joint (lumbar) in the sagittal plane are presented in Table VII. For all three anthropometric cases peak thoracic torque was greater than peak lumbar torque. The 5th percentile female's peak thoracic torque was greater than that of the other two anthropometric cases as shown in Figure 3.

Table VI. Right Erector spinae, Rectus abdominis, Oblique, Psoas major and Iliacus absolute contraction (mm) results for the 3 anthropometric cases.

Musculoskeletal model	Muscles	Mean (mm)	Min.	Max.
5 th percentile female	Erector spinae (ES)	240	230	250
	Rectus abdominis (RA)	280	240	350
	Oblique (O)	140	130	160
	Psoas major (PM)	220	220	220
	Iliacus (I)	120	120	120
50 th percentile male	Erector spinae (ES)	260	250	270
	Rectus abdominis (RA)	320	270	380
	Oblique (O)	190	180	200
	Psoas major (PM)	190	190	200
	Iliacus (I)	110	110	110
95 th percentile male	Erector spinae (ES)	280	270	290
	Rectus abdominis (RA)	350	300	400
	Oblique (O)	200	190	210
	Psoas major (PM)	190	180	190
	Iliacus (I)	100	100	100

Table VII. Lumbar and thoracic joint torque (Nm) results in the sagittal plane for the 3 anthropometric cases.

Musculoskeletal model	Spinal joint	Mean (Nm)	Min.	Max.
5 th percentile female	Thoracic spine	-257.0	-721.0	17.0
	Lumbar spine	0.4	-3.0	2.0
50 th percentile male	Thoracic spine	-8.6	-16.0	3.0
	Lumbar spine	-2.9	-9.0	1.0
95 th percentile male	Thoracic spine	-8.0	-15.0	2.0
	Lumbar spine	-2.5	-8.0	1.0

Results for the thoracic (T12/L1 intervertebral joint) and lumbar (L5/S1 intervertebral joint) spine compression and anterior/posterior (A/P) shear forces are presented in Tables VIII and XI, respectively. The peak thoracic and lumbar spine joint compression forces are greatest for the 5th percentile female and least

for the 50th percentile male (Figure 4 and 5). Peak thoracic spine joint compression forces are greater than the peak lumbar spine joint compression forces for all the anthropometric cases with the exception of the 5th percentile female whose peak lumbar spine joint compression forces exceed her peak thoracic spine joint compression forces.

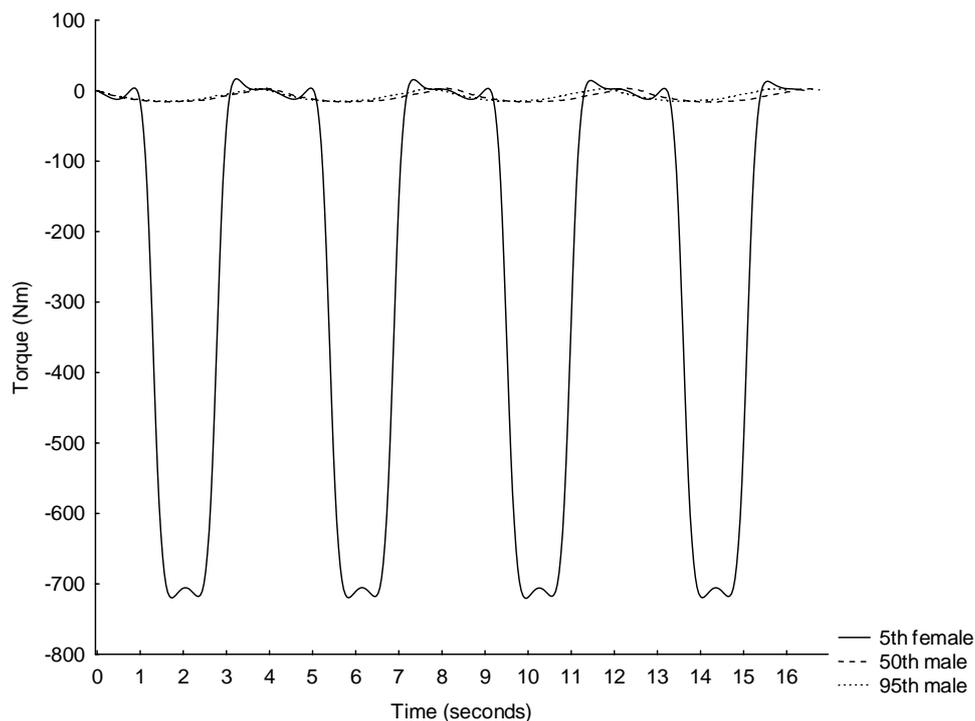


Figure 3: Thoracic spine joint torque (Nm) in the sagittal plane for the 3 anthropometric cases (4 repetitions). Note: negative joint angle indicates trunk flexion.

Table VIII. Thoracic and lumbar spine joint compression forces (N) for the 3 anthropometric cases. Note: positive values indicate forces in a superior direction and negative values indicate forces in an inferior direction.

Musculoskeletal model	Spinal joint	Mean (N)	Min.	Max.
5 th percentile female	Thoracic spine	4485.1	-232.0	11043.0
	Lumbar spine	4485.1	148.2	12580.2
50 th percentile male	Thoracic spine	1364.5	431.0	4206.4
	Lumbar spine	1283.4	-301.8	3388.6
95 th percentile male	Thoracic spine	1352.8	888.7	4673.9
	Lumbar spine	1196.8	-539.6	3664.2

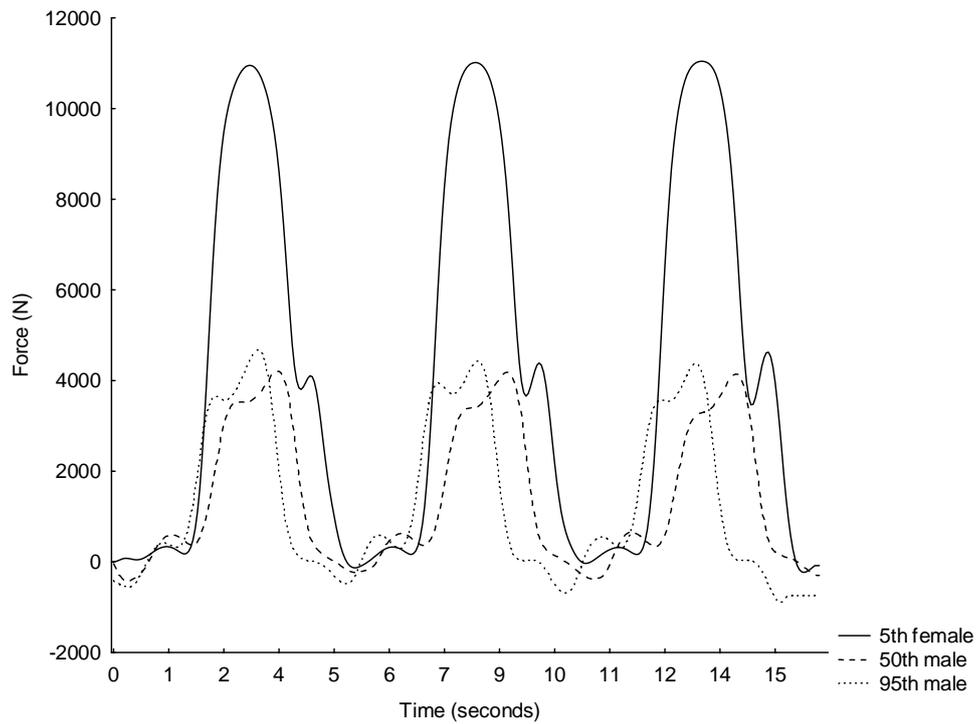


Figure 4. Thoracic spine joint compression forces (N) for the 3 anthropometric cases (4 repetitions).

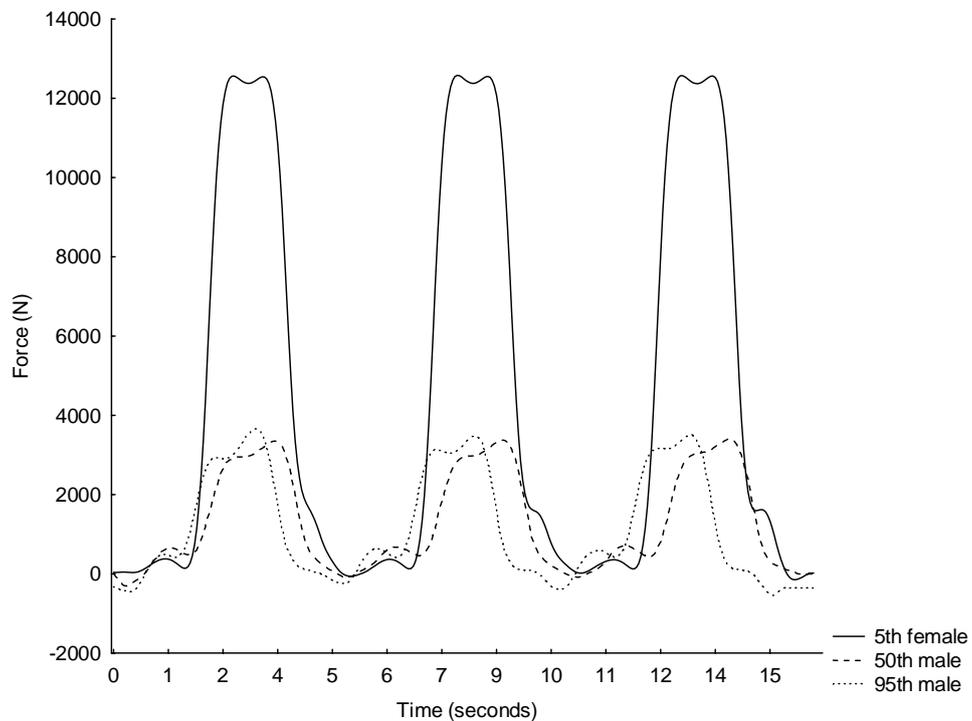


Figure 5. Lumbar spine joint compression forces (N) for the 3 anthropometric cases (4 repetitions).

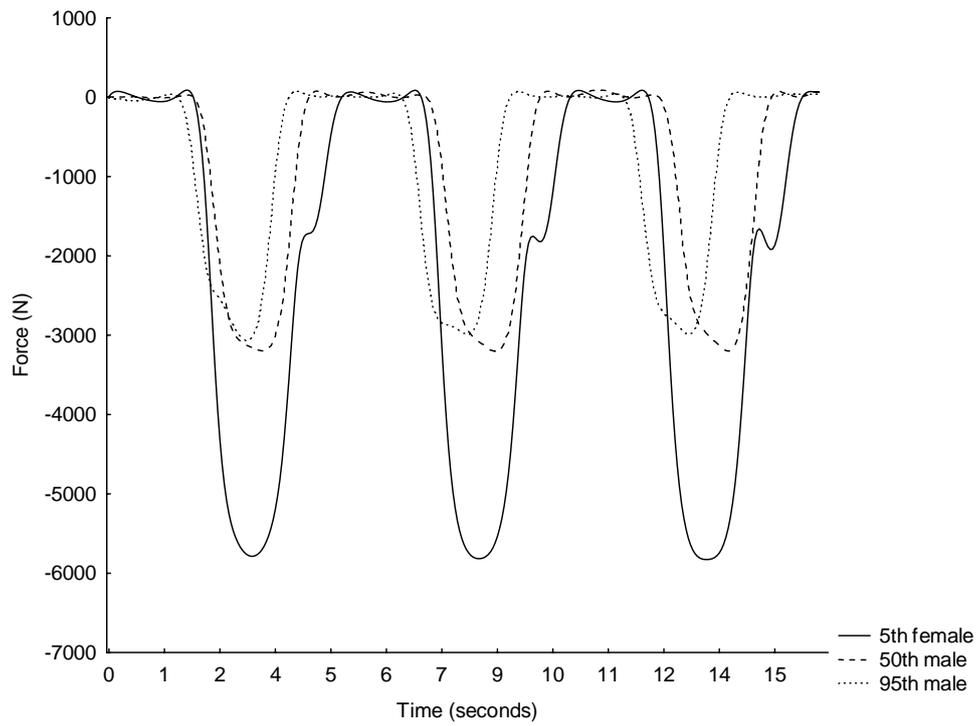


Figure 6. Thoracic spine joint A/P shear forces (N) for the 3 anthropometric cases (4 repetitions).

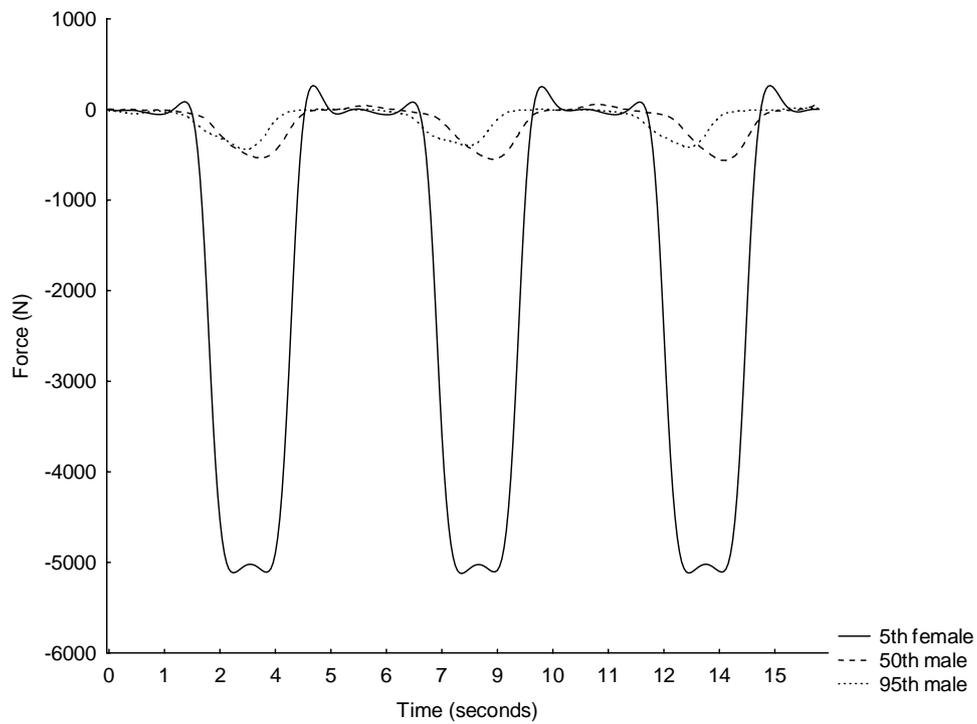


Figure 7. Lumbar spine joint A/P shear forces (N) for the 3 anthropometric cases (4 repetitions).

Peak thoracic spine joint A/P shear forces are greater than peak lumbar spine joint A/P shear forces for all anthropometric cases (Table XI). The 5th percentile female has the highest peak thoracic and lumbar spine joint A/P shear forces in comparison with the 50th and 95th percentile males (Figure 6 and 7).

Table XI. Thoracic and lumbar spine joint anterior/posterior shear forces (N) for the 3 anthropometric cases. Note: positive values indicate forces in a posterior direction and negative values indicate forces in an anterior direction.

Musculoskeletal model	Spinal joint	Mean (N)	Min.	Max.
5 th percentile female	Thoracic spine	2084.8	-5827.9	90.3
	Lumbar spine	1718.3	-5122.3	265.5
50 th percentile male	Thoracic spine	-939.6	3201.3	92.2
	Lumbar spine	-144.1	-559.9	58.5
95 th percentile male	Thoracic spine	-878.2	3067.0	72.3
	Lumbar spine	119.2	436.8	11.4

Discussion

Our first relevant finding of this study was that the LifeModeler™ default model was adequate to solve the forward dynamics simulations for all the anthropometric cases. This was not the case for the previous study in which the seated biceps curl resistance training exercise was modelled. Three adjustments had to be made to the musculoskeletal models on the seated biceps curl machine before the forward dynamics simulations could be solved namely; 1) increase the pCSA of the three default elbow flexor muscles, 2) manipulate the muscle origins and insertions and 3) decrease the joint stiffness in the forward dynamics simulations. The reason for the adjustments not being necessary in this study could possibly be due to the fact that the trunk musculature of the default model is more comprehensive than that of the elbow and shoulder joints. The only relevant muscle that is omitted from the LifeModeler™ default model is the transversus abdominis.

Our second relevant finding was that the software was once again able to sufficiently indicate anthropometric differences with regards to the machine's engineered or manufactured adjustability as it did with the seated biceps curl machine. The anthropometric dimensions of the musculoskeletal models could be accommodated comfortably in relation to the dimensions and adjustability of the abdominal crunch machine except for the 5th percentile female (Figure 8). The small female's feet could barely reach the foot rest and the abdominal crunch pad/cushion was positioned too high and therefore could not be accommodated adequately under her axilla. Furthermore, her lumbar (L5/S1) spine joint could not be aligned properly with the axis of rotation of the machine. As a result her movement on the abdominal crunch machine was negatively impacted as her thoracic spine movement appeared to be exaggerated during the execution of the exercise to the point where it resulted in highly improbable joint loads, possibly an artefact of the modelling process.

The movement on the abdominal crunch machine can possibly be compared to a bent knee sit-up movement, in a study conducted by McGill (1995) the analysis of a bent knee sit-up showed that most of the flexion rotation movement takes place about the hips and not the spine. Rather the spine remains close to the isometric flexed posture throughout the dynamic sit-up cycle. Thus, a sit-up exercise may be considered an isometric flexion exercise as far as the trunk musculature is concerned. The 50th and 95th percentile males appeared to have produced trunk flexion at the lumbar sacral region rather than the unnatural flexion of the thoracic region as demonstrated by the female model. Figure 9 illustrates that the mismatch between the female model anthropometry and machine adjustability resulted in excessive thoracic spine movement so that the thoracic joint reached its range of motion limits. While the results suggests that the female is at increased risk for injury due to poor accommodation by the machine it is possible that the values obtained for muscle tensions and joint loads are exacerbated by an artefact in the modelling process most probably caused by the thoracic joint movement exceeding the default range of motion.

Furthermore, the large muscle lengths recorded specifically in the O muscle could also be an indication that there was exaggerated movement of the trunk rather than that of an isometric contraction in the small female although the other anthropometric cases recorded similar muscle lengths.

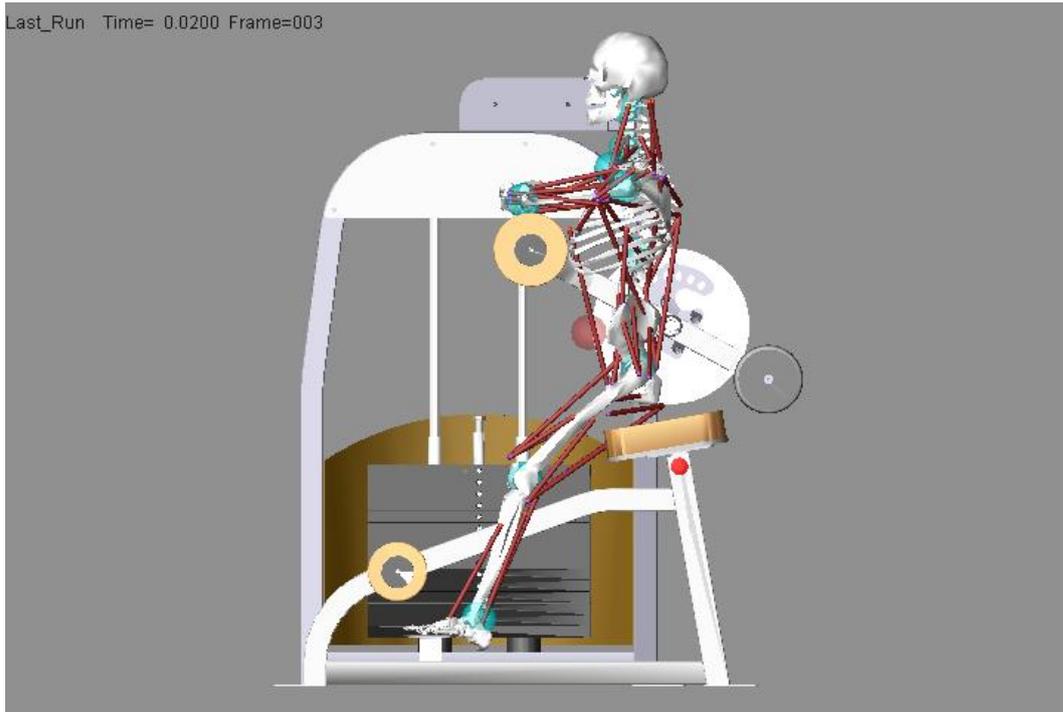


Figure 8. 5th percentile female's positioning on the abdominal crunch resistance training machine

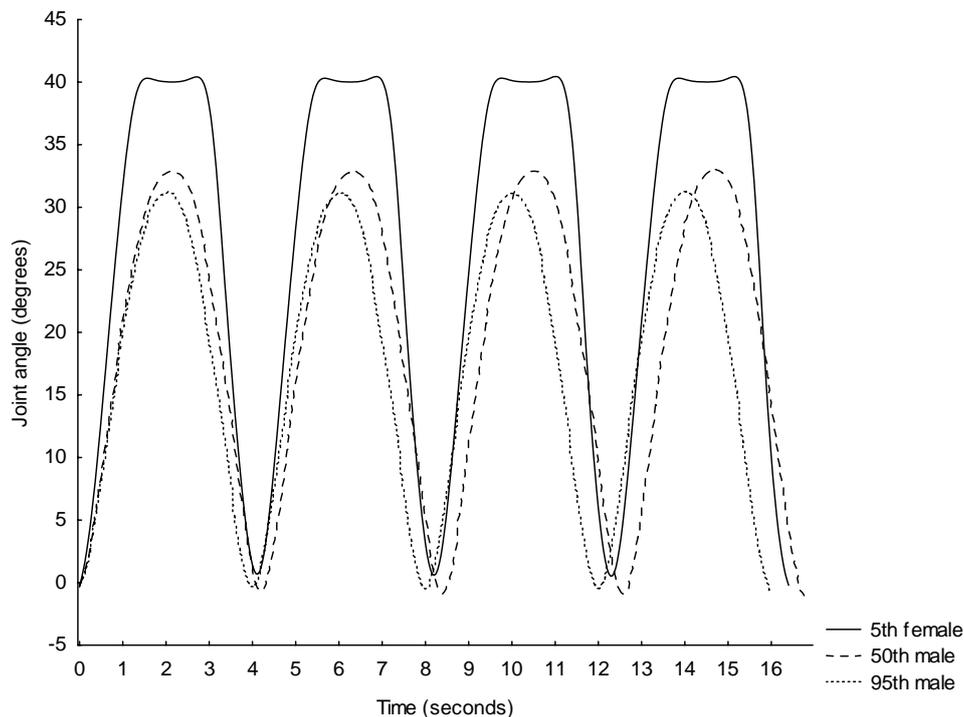


Figure 9. Thoracic joint angle (°) for the 3 anthropometric cases (4 repetitions).

Thirdly, the following relevant findings were made regarding the biomechanical evaluation in terms of exercise efficacy and injury risk. The O muscles in comparison with the RA muscles exerted more force during the exercise for all anthropometric cases. This result was not entirely expected as the O muscles are traditionally exercised using trunk rotation or twisting to the left and right which bring the oblique muscles into more active contraction (Floyd, 2009). The O muscles however, also aid in lumbar flexion and posterior pelvic rotation and thus could explain its significant contribution to the execution of the movement of the abdominal crunch exercise. In addition in a study conducted by McGill (1995) it was found that the RA muscles activity to be slightly lower in bent knee sit-ups as opposed to the straight leg variety, while the O muscles were activated to a greater level presumably to make up the moment deficit. Similar results were obtained in this study in comparison with McGill (1995) with regards to abdominal RA and O muscle force production measured by means of electromyography (EMG) during the straight leg sit-up such as 206N and 236N respectively. It must

be noted that Lifemodeler™ default model only consists of 1 pair of oblique muscles, the orientation of the muscles appear to resemble that of the External obliques.

The ES muscle recruitment can be explained by means of its antagonistic role in relation to the RA and O muscles. In a study conducted on sit-ups it was found that the antagonist extensor moments are produced particularly by the thoracic extensors (Iliocostalis lumborum and Longissimus thoracis). Most of the extensor force was due to neural activation as well as due to passive elastic stretching (McGill, 1995).

Usually when abdominal exercises are performed the exerciser tries to reduce the contribution of the hip flexors with regards to the execution of the movement. The most commonly recommended manner of reducing the contribution of these muscles is to bend or flex the hips as this shortens the iliopsoas muscle and other hip flexors thereby reducing their ability to produce force (Floyd, 2009). In addition, this action of the hips is supposed to reduce lumbar joint compression. However, Axler and McGill (1997) found this not to be the case as there were no differences observed in lumbar spine joint compression or the utilization of the hip flexor muscles in sit-ups performed with the legs bent versus with the legs straight. The positioning of the musculoskeletal model on the abdominal crunch resistance training machine in this study is such that the hips and knees are in a flexed position and results indicate that the Iliopsoas muscles did not significantly contribute to the movement with the exception of the 5th percentile female. The high recorded PM muscle force production in the small female appear unrealistic and could be due to a combination of an artefact as well as poor accommodation of the model. There was much less hip flexion for the 5th percentile female in comparison with that of the other two anthropometric cases. Therefore, the exercise was not successful in isolating the abdominal muscles of the small female. The 5th percentile females force production for all studied muscles was the greatest in comparison with the other anthropometric cases. This result is not

unexpected as anatomical differences could be the reason for the greater force production in the small female such as a smaller lever arm, even although the resistance used for all three cases was proportionally calculated to correlate the anthropometric dimensions.

Joint torque values obtained for the thoracic and lumbar spine in the 50th and 95th percentile males as well as lumbar spine torque values of the 5th percentile female appear to be plausible when comparing the results to peak values obtained by means of isokinetic testing. Langrana and Lee (1984) report trunk flexion/extension values of 60 Nm and 95 Nm respectively in non-disabled female subjects and 136 Nm and 212 Nm respectively in non-disabled male subjects assessed in a seated position at 30 degrees per second. Bearing in mind that the values obtained in this study were not from maximal testing they were still substantially lower than the isokinetic values of Langara and Lee with the exception of the 5th percentile female's thoracic spine torque values which were considerably higher. This once again could have resulted due to her poor positioning, on the abdominal crunch resistance training machine and thus alluding to her high injury risk profile.

Abdominal exercises are prescribed for both the prevention and treatment of low back injury. However, these exercises sometimes appear to have hazardous effects on the spine. A study conducted by Axler and McGill (1997) with the purpose of identifying abdominal exercises that optimize the challenge to the abdominal muscles but impose minimal load penalty to the lumbar spine found that no single exercise optimally trained all of the abdominal muscles while at the same time incurring minimal intervertebral joint loads. Accurate assessment of the risk of spinal injuries during occupational, athletic/exercise and daily activities as well as subsequent design of effective prevention and treatment programmes depend among others, on an accurate estimation of trunk muscle forces and internal spinal loads (i.e., intervertebral disc compression and shear forces)(Arjmand *et al.*, 2009). Thus, an important aspect of this study involved

assessing the intervertebral joint loads. The intervertebral discs work as a visco-elastic system that absorb and distribute forces acting on the spine. When submitted to compressive forces the collagen fibres of the annulus fibrosus are deformed radially expelling fluid from the nucleus pulposus of the discs (Adams and Hutton, 1985). It is important to bear in mind when making this analysis and applying the information that the spine of the default model does not consist of all the individual vertebrae but rather of various segments that represent the different regions of the vertebral column with joints between these segments. Individualised vertebra and corresponding joints might produce different results. Previous research from the American National Institute for Occupational Safety and Health (NIOSH) recommends that spinal compression forces should not exceed 3.4 kN to avoid injury. However there is a very real threat of musculoskeletal injury before this failure limit value has been reached (Snook and Ciriello, 1991; Cooper and Ghassemieh, 2007, Knapik and Marras, 2009). British standards (BS EN 1005-3, 2002) recommend 600 N as the cut-off point for carrying masses, no further recommendations except “time of exposure needs to be minimised” and “a preferred system requires optimal ergonomic position with reduced back bending posture” are made. Therefore, the 5th percentile female’s lumbar and thoracic spine joint compression forces were far above the recommended failure limit of 3.4 kN and therefore she would be at certain risk for a back injury. The 50th and 95th percentile males’ thoracic and lumbar joint spine compression forces were also high and therefore could also be at risk for a back injury.

The thoracic spine joint A/P shear forces appear to be higher than the lumbar spine joint A/P for the three anthropometric cases. Both thoracic and lumbar spine joint A/P shear forces for all three anthropometric cases are above the most commonly cited spine tolerance of 1000 N for shear force as stipulated by McGill (1996), with the exception of the 50th and 95th percentile males’ lumbar spine joint A/P shear forces. Thus, this exercise clearly places all three anthropometric cases at risk of injury especially the small female because of her

extremely high values recorded for both thoracic and lumbar spine joint A/P shear forces. It is important to note that the modelling does not take conditioning differences between individuals of similar anthropometric dimensions into account which can protect the individual against spinal loading. Furthermore, increased strength of trunk flexors and extensors muscles are thought to raise intra-abdominal pressure and to decrease spinal loading (Aspden, 1988).

The results regarding the spine reaction forces are not surprising. Predictions of compressive load on the low back were found to be substantial during both isometrically held sit-ups and dynamic sit-ups with minimal acceleration components by Axler and McGill (1997). Therefore, forces on the back during a resistance exercise such as this can be expected to put substantial strain on the back especially if positioning is not adequate as with the 5th percentile female.

Lastly, it should be noted when evaluating an exercise in terms of efficacy and injury risk it is sometimes useful to compare various exercise techniques, different exercises for the same muscle groups as well as different manufacturer's equipment for the same exercise.

Conclusion

It can be concluded that the default model of the Lifemodeler™ software was reasonably successful in evaluating the abdominal crunch resistance training exercise. No adjustments had to be made to the default model in order to solve the forwards dynamics simulations. The most significant value of the abdominal crunch resistance training machine 3D musculoskeletal modelling was in demonstrating the unacceptable thoracic and lumbar spine joint compression and A/P forces which could place the exerciser at high risk for a back injury. Therefore, caution should be used when prescribing the exercise for the training of the abdominal muscles especially if the individual has a predisposing back problem or injury. In addition, individuals of small anthropometric dimensions such as some females and children cannot be accommodated suitably on the

machine which unfavourably influences exercise posture and technique which can further place the exerciser at increased risk for injury and decrease the efficacy of the exercise. Therefore, design adjustments to the abdominal crunch resistance training machine such as adapting the foot rest should be considered by the manufacturer.

References

Aspden, R.M. (1988). The spine as an arch. A new mathematical model. *Spine*, **13**, 266 – 274.

Adams, M.A., and Hutton, W.C. (1985). Gradual disc prolapse. *Spine*, **10**, 524 – 531.

Agnesina, G., Taiar, R., Havel, N., Guelton, K., Hellard, P., and Toshev, Y. (2006). BRG.LifeMOD™ modeling and simulation of swimmers impulse during a grab start. *Proceedings of the 9th symposium on 3D analysis of human movement*. Valenciennes.

Annegarn, J., Rasmussen, J., Savelberg, H.H.C.M., Verdijk, L.B., and Meijer, K. (2007) (Accessed 2008). *Scaling strength in human simulation models*. www.anybodytech.com.

Arjmand, N., Gagnon, D., Plamondon, A., Shirazi-Adl, A., and Larivière, C. (2009). Comparison of trunk muscle forces and spinal loads estimated by 2 biomechanical models. *Clinical Biomechanics*, **24**, 533 – 541.

Axler, C.T., and McGill, S.M. (1997). Low back loads over a variety of abdominal exercises: searching for the safest challenge. *Medicine and Science in Sports and Exercise*, **29 (6)**, 804 – 811.

Beachle, T.R., and Groves, B.R. (1992). *Weight training: steps to success*. Champaign: Human Kinetics.

Biomechanics Research Group, Inc. (2006). *LifeMOD biomechanics modeler manual*.

Bredenkamp, K. (2007). The characterisation of the male and female body forms of the SANDF. *ERGOTECH Document P0683/2007/01*. Centurion: ERGOnomics TECHNOlogies. South Africa.

BS EN 1005 – 3: (2002). *Safety of machinery – Human physical performance – Part 3: Recommended force limits for machinery operations*. London: British Standards Institute.

Cooper, G., and Ghassemieh, E. (2007). Risk assessment of patient handling with ambulance stretcher systems (ramp / winch), easy-loader, tail-lift using biomechanical failure criteria. *Medical Engineering & Physics*, **29**, 775 – 787.

Dabnichki, P. (1998). Biomechanical testing and sport equipment design. *Sports Engineering*, **1**, 93 – 105.

De Jongh, C. (2007). *Critical evaluation of predictive modelling of a cervical disc design*, Unpublished Masters thesis, University of Stellenbosch.

Dennis, R., and Finch, C. (2008). Sports injuries. *International Encyclopaedia of Public Health*. 206 – 211.

Floyd, R.T. (2009). *Manual of structural kinesiology (17th Ed)*. New York: McGraw-Hill.

Gordon, C.C., and Brantley, J.D. (1997). Statistical modelling of population variation in the head and face. *The design and integration of helmet systems International Symposium Proceedings*. Massachusetts, USA.

Hofmann, M., Danhard, M., Betzler, N., Witte, K., and Edelmann, J. (2006). Modelling with BRG.lifeMOD™ in sport science. *International Journal of Computer Science in Sport*, **5**.

Knapik, G.G., and Marras, W.S. (2009). Spine loading at different lumbar levels during pushing and pulling. *Ergonomics*, **52**(1): 60-70.

Langara, N.A., and Lee, C.K. (1984). Isokinetic evaluation of trunk muscles. *Spine*, **9**, 171 – 175.

Lou, S.L., Chen, Y.C., You, J.Y., and Hsu, C.K. (2007). Functional evaluation of elliptical trainer with human motion analysis, *Proceedings of 2007 International Society of Biomechanics conference*, Taiwan.

McGill, S.M. (1995). The mechanics of torso flexion: sit-ups and standing dynamic flexion manoeuvres. *Clinical Biomechanics*. **10**(4), 184 - 192.

McGill, S.M. (1996). Searching for the safe biomechanical envelope for maintaining healthy tissue, Pre-Meeting workshop, *International Society for the Study of the Lumbar Spine: The Contribution of Biomechanics to the prevention and treatment of low back pain*, University of Vermont, June 25.

Nieman, D.C. (2007). *Exercise testing and prescription: health-related approach (6th Ed.)*. New York: McGraw-Hill.

National Institute for Occupational Safety and Health. (1997). Musculoskeletal disorders and workplace factors: a critical review of epidemiologic evidence for

work-related musculoskeletal disorders of the neck, upper extremity, and low back. *US Department of Health and Human Services (DHHS) Public Health Service, Centres for Disease Control*. Cincinnati: National Institute for Occupational Safety and Health Division of Biomedical of Behavioural Science.

Olesen, C.G., Andersen, M.S., Rathleff, M.S., de Zee, M., and Rasmussen, J. (2009). Understanding the biomechanics of medial tibial stress syndrome – A simulation study using a musculoskeletal model. *Proceedings of the 2009 International Society of Biomechanics*. Cape Town.

Perrin, D.H. (1993). *Isokinetic exercise and assessment*. Champaign: Human Kinetics.

Prentice, W.E. (2010). *Rehabilitation techniques for sports medicine and athletic training*. New York: McGraw-Hill.

Rasmussen, J., and de Zee, M., Damsgaard, M., Christensen, S.T., Marek, C. and Siebertz, K. (accessed 2007). *A general method for scaling musculo-skeletal models*. www.anybodytech.com.

Rietdyk, S., and Patla, A.E. (1999). Context-dependent reflex control: Some insights into the Role of Balance. *Experimental Brain Research*. **119**, 251 – 259.

RSA-MIL-STD-127. (2004). Ergonomic design: Anthropometry and environment. *RMSS Document*, **1**, 1 – 196.

Schillings, A.M., Van Wezel, B.M., and Duysens, J. (1996). Mechanically induced stumbling during human treadmill walking. *Journal of Neuroscience Methods*, **67**, 11 – 17.

Snook, S.H., and Ciriello, V.M. (1991). The design of manual handling tasks: revised tables of maximum acceptable weights and forces. *Ergonomics*, **34**: 1197-1213.

Vaughn, C.L. (1989). *Biomechanics of sport*. Florida: CRC Press.

CHAPTER 5

THREE DIMENSIONAL MUSCULOSKELETAL MODELLING OF THE SEATED ROW RESISTANCE TRAINING EXERCISE FOCUSING ON THE BIOMECHANICAL AND ANTHROPOMETRIC CONSIDERATIONS OF THE END-USER

Kim Nolte¹, Pieter E. Krüger¹, & P. Schalk Els²

¹*Department of Biokinetics, Sport and Leisure Sciences, University of Pretoria, Pretoria, South Africa,* ²*Department of Mechanical and Aeronautical Engineering, University of Pretoria, Pretoria, South Africa*

Abstract

The aim of this study was to evaluate whether three dimensional (3D) musculoskeletal modelling could be effective in assessing the safety and efficacy of exercising on a seated row resistance training machine. The focus of the evaluation was on biomechanical and anthropometric considerations of the end-user. Three anthropometric cases were created; these represented a 5th percentile female as well as a 50th and 95th percentile male based on body mass index (BMI). Resistance on the seated row machine was set at fifty percent of the functional strength one repetition maximum (1RM) for each anthropometric case, two repetitions were performed. Results indicate that the default model of the Lifemodeler™ software has important limitations which should be taken into consideration when being used to evaluate exercise equipment. Adjustments had to be made to the model in order to solve the forward dynamics simulations and as a result no muscle forces or contraction values were obtained. This negatively influenced the value of the results as these parameters are important when analysing an exercise. The seated row resistance training machine's engineered or manufactured adjustability was sufficient as it appeared to accommodate the three anthropometric cases adequately so that no substantial injury risk was established for this exercise.

Keywords: *Resistance training equipment, seated row, biomechanics, anthropometric, modelling, LifemodelerTM, inverse dynamics, forward dynamics*

Introduction

This article constitutes the third article in a series of four. The series consists of three dimensional (3D) musculoskeletal modelling with a focus on biomechanical and anthropometric variables of four commonly used pieces of resistance training equipment.

The advancement in computer technology and data processing capability has allowed the improvement of modelling software to a point where dynamic problems can now be simulated and analysed in a digital environment (Kim and Martin, 2007; Wagner *et al.*, 2007; Zenk *et al.*, 2005). Furthermore, computer simulations allow for the exploration of the limitations of human movement systems without endangering human subjects (Luttgens *et al.*, 1992). With the capability to simulate musculoskeletal human models interacting with mechanical systems many questions concerning the effects of the resistance training equipment on the body can be studied.

This study presents the musculoskeletal modelling of three anthropometric cases while exercising on a seated row resistance training machine. Thus, the primary aim of this study was to determine the efficacy of 3D musculoskeletal modelling in evaluating resistance training equipment design such as the seated row resistance training machine.

In recent years, the popularity of dynamic resistance training has risen. This type of training is suitable for developing muscular fitness of men and women of all ages, as well as children (Heyward, 2004). The seated row forms the basis of many land-based training programmes for athletes, more specifically rowers. However, it is also often included as part of strength training programmes for non-athletes. It is an effective exercise to strengthen the musculature of the upper back. The primary joint movements for this exercise are shoulder extension and elbow flexion and thus the prime movers include the Latissimus dorsi and the Biceps brachii muscles (Heyward, 2004). Other important muscles

involved in the seated row exercise are the Posterior deltoids, Trapezius and Rhomboideus muscle groups (Floyd, 2009). In terms of understanding the biomechanics associated with various resistance training exercises, a great deal of literature has investigated the kinetics and kinematics associated with the bench press, squat and Olympic lifts. Therefore, it would appear as there is a preoccupation of researchers with extension type tasks and very little attention is given to other movements (Cronin *et al.*, 2007). Furthermore, much of the available research consists of rowing ergometer analysis rather than the seated row resistance exercise.

Methods

Equipment

A 3D musculoskeletal full body model was created using LifeModeler™ software and incorporated into a multibody dynamics model of the seated row resistance machine modelled in MSC ADAMS (Figure 1). The LifeModeler™ software runs as a plug-in on the MSC ADAMS software. LifeModeler™ software has previously been used in studies in the fields of sport, exercise and medicine (Schillings *et al.*, 1996; Rietdyk and Patla, 1999; Hofmann *et al.*, 2006; Agnesina *et al.*, 2006; De Jongh, 2007; Olesen *et al.*, 2009). It was decided to evaluate a default model as generated through the software. This model consists of 19 segments including a base set of joints for each body region. Specifically, the spine does not consist of individual vertebrae but rather of various segments that represent different regions of the vertebral column with joints between these segments. Furthermore, the default model has a full body set of 118 muscle elements attached to the bones at anatomical landmarks, which includes most of the major muscle groups in the body. Closed loop simple muscles were modelled. Closed loop muscles contain proportional-integral-differential (PID) controllers. The PID controller algorithm uses a target length-time curve to generate the muscle activation and the muscles follow this curve. Because of this approach, an inverse dynamics simulation using passive recording muscles is required prior to simulation with closed loop muscles. Simple muscles fire with no

constraints except for the physiological cross-sectional area (pCSA), which designates the maximum force a muscle can exert. The graphs of simple muscle activation curves will generally peak at a flat force ceiling value (Biomechanics research group, 2006).

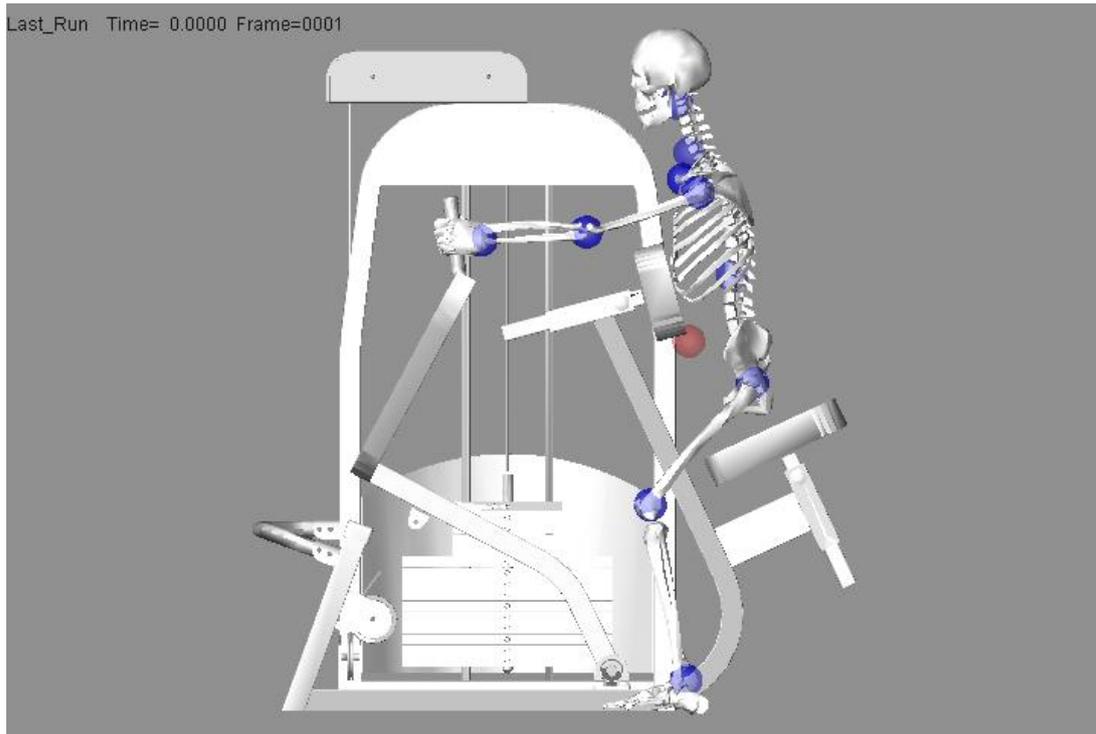


Figure 1. 3D musculoskeletal modelling of the seated row resistance training machine and 50th percentile male musculoskeletal model using LifeModeler™ and MSC ADAMS software.

Musculoskeletal full body human and seated row computer aided design (CAD) models

Three anthropometric cases were created for each piece of equipment. The human models were created using the GeBOD anthropometry database (default LifeModeler™ database) but were based on body mass index (BMI) data obtained from RSA-MIL-STD 127 Vol 1 (2004). This standard is a representative anthropometry standard of the South African National Defence Force which is

kept current by a yearly sampling plan and is an accurate representation of the broader South Africa population. Bredenkamp (2007) described a process to characterize the body forms of SANDF males and females. Body form variances described by two principle components (PC's) for the SANDF males and two PC's for SANDF females were included in the modelling process. Positive and negative boundary cases of each PC, representing the boundary conditions to be accommodated in design (Gordon and Brantley, 1997), identified the total range of four male and four female models. It was decided to use the cases representing the smallest female as well as an average and large male for the three anthropometric cases for this study. These cases could be seen as what are traditionally known as a 5th percentile female, 50th percentile male and a 95th percentile male based on the BMI of each of these cases. Thus, for the purpose of building these biomechanical models, a correlation between BMI and functional body strength was assumed. Similar assumptions have previously been made in biomechanics full body model simulations (Rasmussen *et al.*, 2007). A study by Annegarn *et al.* (2007) also verified scaled modelling strengths against actual functional body strengths and correlations ranged from 0.64 to 0.99.

This approach was followed in order to ensure that the equipment can accommodate an acceptable sample of the South African end-user population. A CAD model of the seated row resistance training machine was obtained from a South African exercise equipment manufacturing company. The model in a Parasolid file format was imported into the LifeModeler™ simulation software.

The Adams software was used to create two design variables in order to adjust the external resistance (as selected by the amount of weights when using a selectorised resistance training machine) and to specify the radius of the cam over which the cable of an actual exercise machine would run in order to lift the selected resistance. This was possible since this machine employed a circular cam system however, this would not be possible with exercise machines employing non-circular cam systems, in order to attain better mechanical

advantage for the end-user. A special contact force (solid to solid) was created between the weights being lifted and the remainder of the weight stack during the simulation. A coupler joint was created linking the revolute joint (driver) of the lever arm attached to the handle bars with the translational joint of the weight stack. The design variable created for the radius of the cam was referenced as the scale of the coupled joint (translational joint at weights). The design variable created for the mass of the weights was then adjusted according to the pre-determined resistance for each anthropometric case.

The external resistance applied in the models was based on data obtained from RSA-MIL-STD 127 Vol 5 (2001). This database consists of a range of human functional strength measurement variables for SANDF males and females. Due to its representivity this standard may be considered an accurate representation of the functional body strength of the South Africa population (RSA-MIL-STD-127, 2001). Furthermore, functional strength data was used from activities that most closely resembled the movements of the exercise as well as the muscle groups used during such movement. Fifty percent of the functional strength one repetition maximum (1RM) for each anthropometric case was used as this can be considered a manageable resistance to perform an exercise with appropriate form and technique for two repetitions.

Simulation

Extreme care was taken with the positioning of the musculoskeletal model onto the seated row machine to ensure technique, posture and positioning was correct according to best exercise principles (Table I). Optimal positioning of the models on the equipment required that there was approximately 90 degrees of shoulder flexion with slight elbow flexion that resulted in the hands finally being just higher than the elbows for all the anthropometric cases. This would be considered the correct posture for this exercise and resulted in the handle height being just below shoulder level for all the cases. Furthermore, total manufacturer adjustability of the exercise machine was used in order to ensure correct

positioning for each of the anthropometric cases. The following steps were performed in order to ensure realistic kinematics during the inverse dynamics simulations: 1) Positioning of the human model on the exercise equipment, 2) Adjustment of the posture to allow for the human machine interface to be created, 3) Creating the constraints between the human and machine, 4) Prescribing the motion of the repetitions, 5) Evaluation of the resultant kinematics, 6) Adjustment of joint positions until inverse dynamics resulted in a realistic exercise movement. Bushing elements were used to secure the chest to the chest pad/cushion as well as the lower torso to the seat and spherical joints were used to connect the hands to the handle bars of the seated row machine. Bushing elements were preferred to fixed joint elements because it allows for limited translational and rotational motion. Also, the amount of motion can be controlled by changing stiffness and damping characteristics in all 3 orthogonal directions. The original joints created in the biomechanical model had default joint parameters (Stiffness (K) =1E4, Dampening (C) =1000). Joints with such high joint stiffness are created to ensure a relatively “rigid” model that provides a stable and smooth motion when manipulated by motion splines. This is especially important during the movement of the model into the initial posture as well as to ensure smooth model motion during inverse dynamics. After the muscle lengths had been recorded in the inverse dynamics, the joint stiffness was changed to near zero, to represent actual stiffness in human joints.

The inverse dynamics – forward dynamics method was applied during the simulations. Inverse dynamics simulations are performed on models which are being manipulated by the use of motion agents or motion spines. During the inverse dynamics simulation, a rotational motion was applied to the revolute joint of the lever arm attached to the handle bars of the seated row machine in order to generate the required movement of the resistance training machine. This movement replicated the pulling (concentric) and resisting (eccentric) phase of the exercise. The time for the concentric phase was set at 1.66 seconds and the eccentric phase longer at 3.33 seconds to mimic conventional resistance training

technique in which the downward phase is more deliberate to prohibit the use of momentum. The 1.66 second concentric phase included a STEP function approximation over 0.5 seconds to ensure a gradual start to the movement. The joints forces of the model were recorded during the inverse dynamics simulation in order to calculate the changes in joint torques to result in the required machine movement.

After the inverse dynamics simulation was performed, the rotational motion was removed from the rotational joint of the lever arm of the seated row machine. The resulting joint movements were then used to drive the model during the forward dynamics simulation in the manner as developed through the inverse dynamics simulation. During the forward dynamics simulation the model is guided by the internal forces (muscle length changes resulting in joint angulations and torques) and influenced by external forces (gravity, contact and determined exercise resistance). It is important to note that changes had to be made to the LifeModeler™ default model in order to solve the models with plausible kinematics during the forward dynamics simulations. Considering the research problem the detail of these changes will be discussed under the discussions section. All results presented are derived from the forward dynamics simulations after these changes to the default model were made.

Table I. Exercise starting posture for the 3 anthropometric cases on the seated row machine. Where applicable the joint angles refer to bi-lateral joints. Results are presented for the sagittal, transverse and frontal planes (degrees). Note that F = flexion, E = extension, IR = internal rotation and AB = abduction.

Joint	5th percentile female	50th percentile male	95th percentile male
Scapula	0.0; 0.0; .0.0	0.0; 0.0; 0.0	0.0; 0.0; 0.0
Shoulder	85.0(F); 5.0(IR); 7.0(AB)	85.0(F); 5.0(IR); 4.5(AB)	85.0(F); 5.0(IR); 2.5(AB)
Elbow	15.0(F); 10.0(IR); 0.0	15.0(F); 10.0(IR); 0.0	15.0(F); 10.0(IR); 0.0
Wrist	0.0; 0.0; 0.0	0.0; 0.0; 0.0	0.0; 0.0; 0.0
Hip	30.0(F); 0.0; 0.0	35.0(F); 0.0; 0.0	52.0(F); 0.0; 0.0
Knee	30.0(F); 0.0; 0.0	45.0(F); 0.0; 0.0	60.0(F); 0.0; 0.0
Ankle	0.0; 0.0; 0.0	12.0(E); 0.0; 0.0	12.0(E); 0.0; 0.0
Upper neck	0.0; 0.0; .0.0	0.0; 0.0; 0.0	0.0; 0.0; 0.0
Lower neck	0.0; 0.0; .0.0	0.0; 0.0; 0.0	0.0; 0.0; 0.0
Thoracic	0.0; 0.0; .0.0	0.0; 0.0; 0.0	0.0; 0.0; 0.0
Lumbar	15.0(F); 0.0; 0.0	15.0(F); 0.0; 0.0	15.0(F); 0.0; 0.0

Data analysis

The anthropometric dimensions and exercise postures of the musculoskeletal human models were visually assessed in relation to the dimensions and adjustability of the resistance training equipment in order to determine if all three anthropometric cases representative of the South African end-user population could comfortably be accommodated on the seated row resistance training machine. Key aspects included start and end exercise posture as well as maintaining correct technique throughout the exercise during the simulations.

The kinematic and kinetic data from the simulations were analysed specifically in terms of exercise efficacy and peak muscular and joint force production of the prime movers of the seated row exercise. Furthermore, the risk of injury to the musculoskeletal system of the exerciser was ascertained by comparison of measured forces with safe loading limits for joints of the lumbar and thoracic spine. The dynamic mode of analysis includes all the aspects of motion in the calculation of joint forces and internal stresses, including the effects introduced by changing velocity and acceleration components (Wagner *et al.*, 2007). Different joint loading criteria were derived using biomechanical research taking into consideration the posture and anthropometry (Cooper and Ghassemieh,

2007). However, criteria for determining whether a particular task or exercise is “safe” based on tissue-level stresses are available for only a small number of tissues and loading regimes (e.g. lower back motion segments in compression) (Wagner *et al*, 2007).

Due to the nature of this study only basic descriptive statistics were performed by means of the STATISTICA© software package (Statsoft).

Results

Three anthropometric cases created for each piece of equipment based on BMI data obtained from RSA-MIL-STD 127 Vol 1 (2004) were used for the study and results were assessed (Table II). Table III represents the external resistance applied in the models, fifty percent of the functional strength 1RM for each anthropometric case was used for two repetitions.

Table II. Anthropometric details of population groups studied (RSA-MIL-STD, Vol 1, 2004).

User population group	Body mass (kg)	Stature (mm)
5 th percentile female	49.5	1500
50 th percentile female	66	1610
95 th percentile male	85	1840

Table III. User population strength data (RSA-MIL-STD, Vol 5, 2001).

User population group	User population group exercise resistance (50% 1RM) kg
5 th percentile female	11
50 th percentile male	18
95 th percentile male	30

Due to the involvement of wrist, elbow and shoulder joints in the seated row exercise, torque values for these joints are presented in Table IV. Values for the

right side of the body are reported on as theoretically the values for the left and right side should be similar. The 95th percentile male recorded the highest peak joint torque values for the three joints (Figures 2, 3 and 4). The 50th percentile male's peak elbow and wrist torque values were the lowest. The peak shoulder torque values of the 5th percentile female and 50th percentile male were similar and were lower than the 95th percentile males values (Figure 4). For the three anthropometric cases the peak shoulder joint torque values were the lowest, followed by the wrist and the greatest for the elbow.

Table IV. Right wrist, elbow and shoulder joint torque (Nm) results in the sagittal plane for the 3 anthropometric cases. Note that the joint torque values presented in the figures are in Nmm due to the default units of the modelling software.

Musculoskeletal model	Joint	Mean (Nm)	Min.	Max.
5 th percentile female	Wrist	-1.6	-4.5	0.0
	Elbow	-4.0	-6.3	0.0
	Shoulder	0.9	-1.2	3.2
50 th percentile male	Wrist	-1.3	-3.1	0.0
	Elbow	-3.0	-4.7	0.0
	Shoulder	0.2	-1.2	1.9
95 th percentile male	Wrist	-0.2	-4.8	2.3
	Elbow	-13.3	-19.5	0.0
	Shoulder	1.7	-2.5	7.0

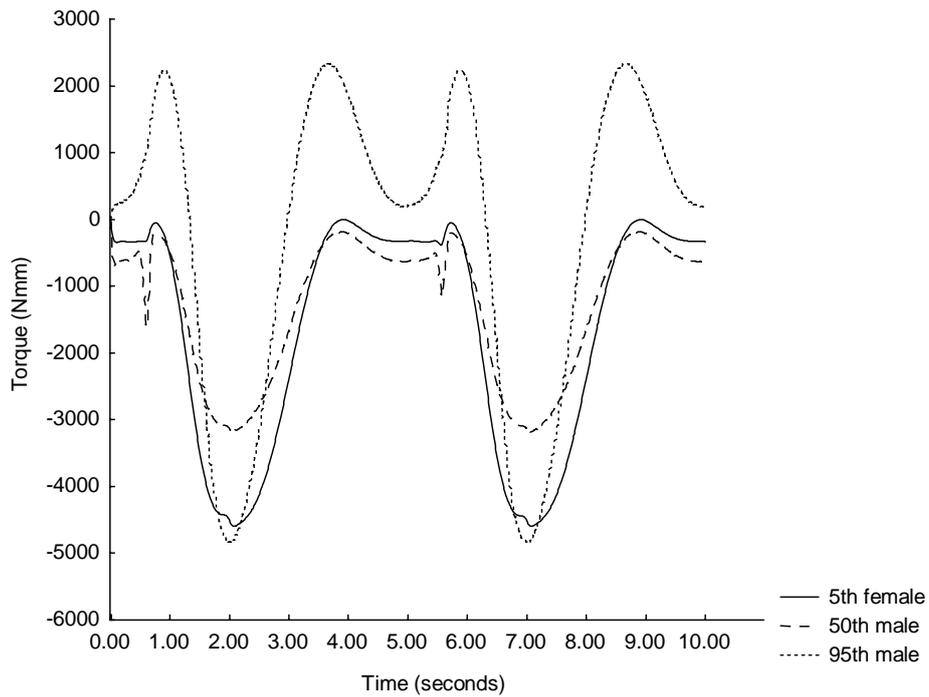


Figure 2. Sagittal right wrist joint torque (Nmm) for the 3 anthropometric cases (2 repetitions).

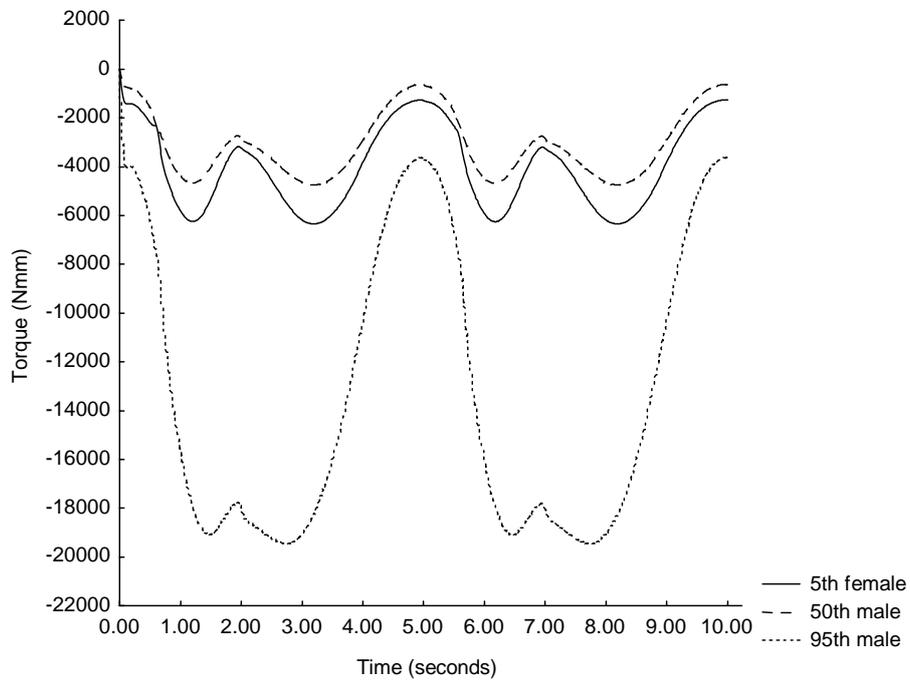


Figure 3. Sagittal right elbow joint torque (Nmm) for the 3 anthropometric cases (2 repetitions).

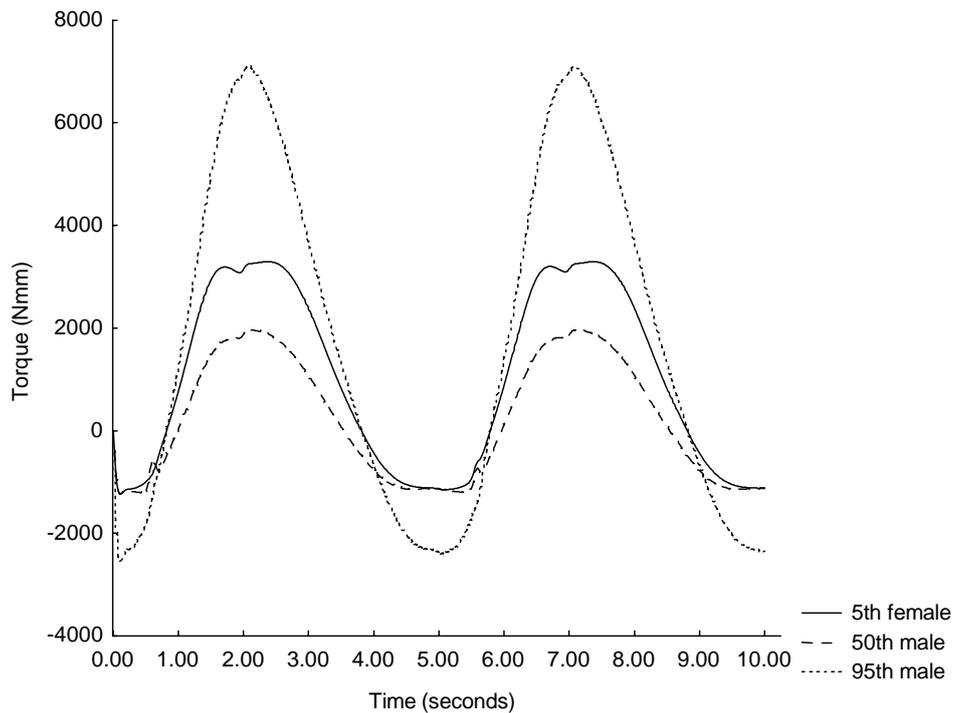


Figure 4. Sagittal right shoulder joint torque (Nmm) for the 3 anthropometric cases (2 repetitions).

The seated row exercise is a multi-joint exercise thus movement in the sagittal plane of the shoulder, elbow and wrist (right side) are reported on (Table V). The least movement occurred at the wrist joint, followed by the shoulder joint with the most movement occurring at the elbow joint for the three anthropometric cases. Range of motion of the 5th percentile female was the least for the three joints. Range of motion was the greatest for the 95th percentile male in the wrist and shoulder joint. Elbow joint range of motion was greatest for the 50th percentile male (Figure 5).

Table V. Sagittal right wrist, elbow and shoulder joint angle (°)

Musculoskeletal model	Joint	Mean (degrees)	Min.	Max.
5 th percentile female	Wrist	16.0	0.0	26.5
	Elbow	-75.8	-129.6	-15
	Shoulder	-52.0	-85.0	-16.4
50 th percentile male	Wrist	16.3	0.0	27.5
	Elbow	-75.9	-130.5	15.0
	Shoulder	-53.7	-85	-20.8
95 th percentile male	Wrist	17.1	0.0	29.0
	Elbow	-73.2	-125.9	-15.0
	Shoulder	-57.8	-85.0	-28.6

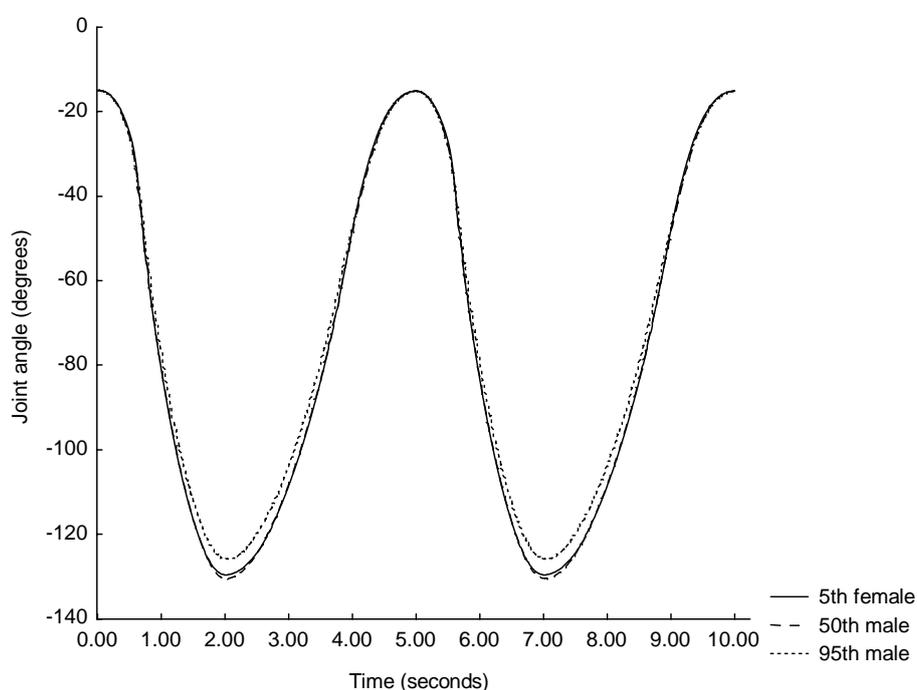


Figure 5. Sagittal right elbow angle (°) for the 3 anthropometric cases (2 repetitions). Note: negative joint angle indicates elbow flexion.

Results for the thoracic (T12/L1 intervertebral joint) and lumbar (L5/S1 intervertebral joint) spine compression and anterior/posterior (A/P) shear forces are presented in Tables VI and VII respectively. Peak thoracic spine joint compression forces were greatest for the 50th percentile male, followed by the 95th percentile male and were lowest in the 5th percentile female (Figure 6). There was a similar trend in the peak lumbar spine joint compression forces

(Figure 7). In all anthropometric cases the peak lumbar spine joint compression forces were greater than the peak thoracic spine joint compression forces.

Table VI. Thoracic and lumbar spine joint compression forces (N) for the 3 anthropometric cases.

Note: positive values indicate forces in a superior direction and negative values indicate forces in an inferior direction.

Musculoskeletal model	Spinal joint	Mean (N)	Min.	Max.
5 th percentile female	Thoracic spine	100.3	79.4	149.1
	Lumbar spine	145.0	124.1	193.8
50 th percentile male	Thoracic spine	140.0	113.7	168.1
	Lumbar spine	200.0	173.2	227.6
95 th percentile male	Thoracic spine	-32.7	-97.1	162.8
	Lumbar spine	28.2	-36.1	223.9

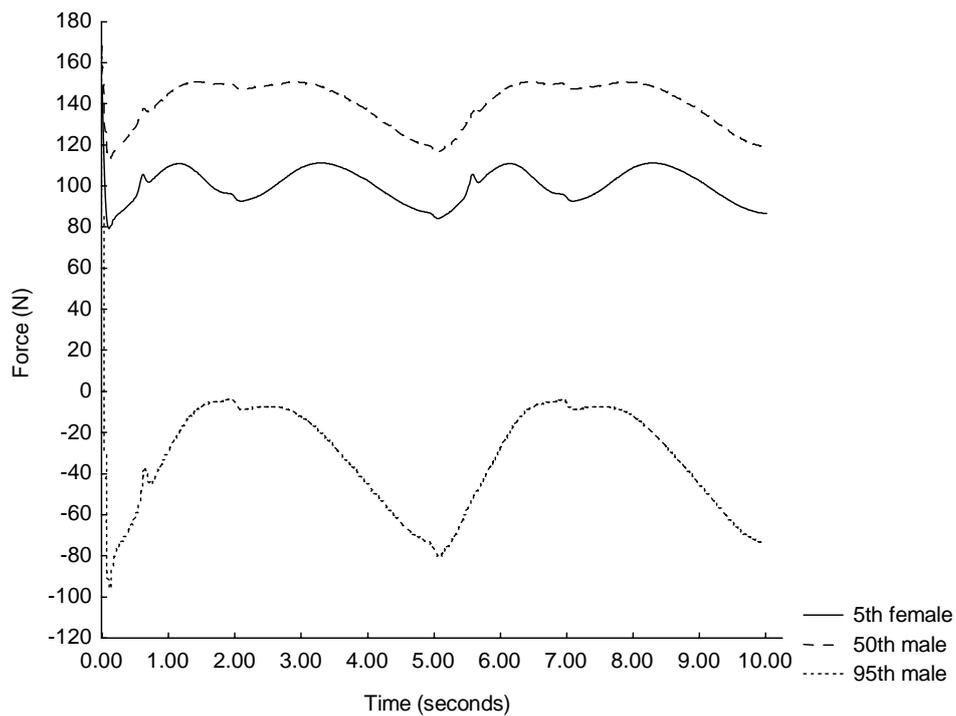


Figure 6. Thoracic spine compression forces (N) for the 3 anthropometric cases (2 repetitions)

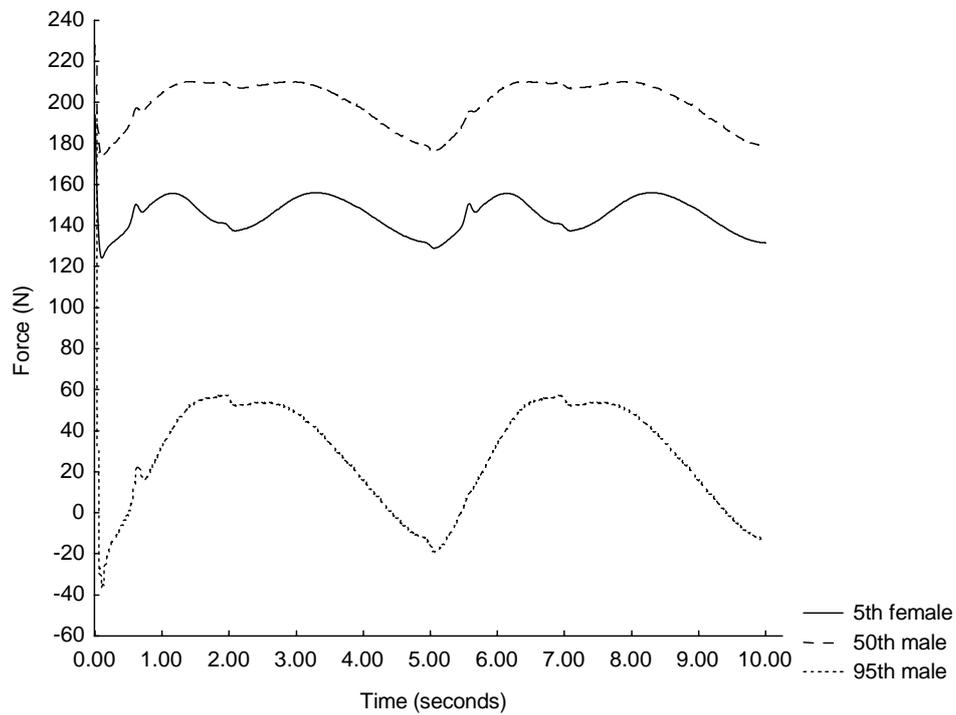


Figure 7. Lumbar spine compression forces (N) for the 3 anthropometric cases (2 repetitions).

The 95th and 50th percentile males recorded similar peak thoracic and lumbar spine A/P shear forces. The 5th percentile females peak thoracic spine and lumbar A/P shear forces were the least in comparison with the other two anthropometric cases (Figure 8). For all cases the peak thoracic and lumbar spine A/P shear forces were equal.

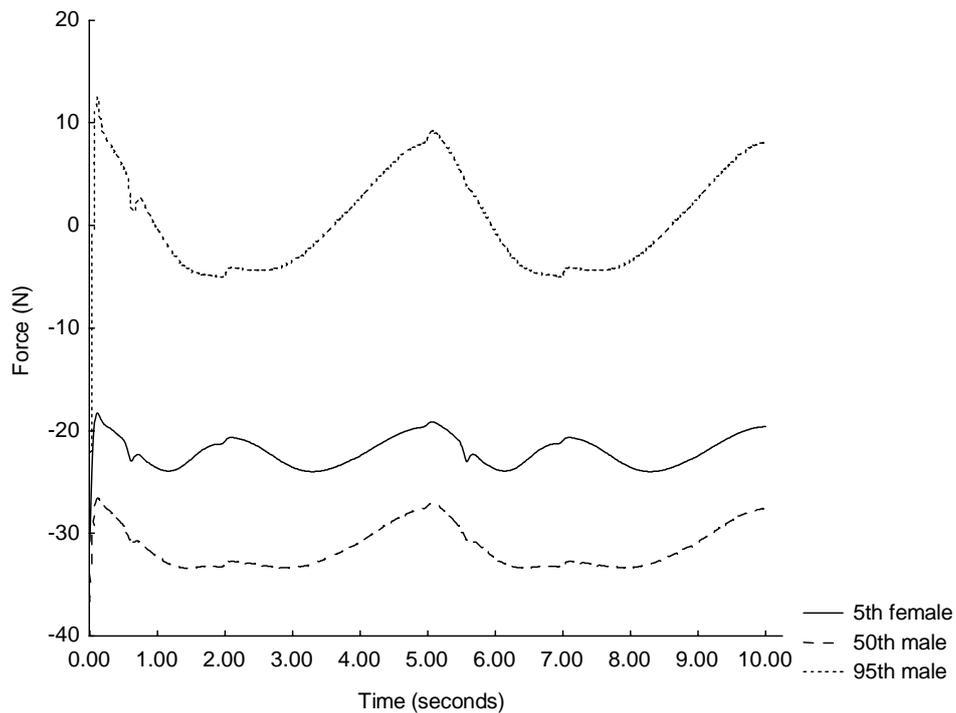


Figure 8. Lumbar spine anterior/posterior (A/P) shear forces (N) for the 3 anthropometric cases (2 repetitions).

Table VII. Thoracic and lumbar spine joint anterior/posterior (A/P) shear forces (N) for the 3 anthropometric cases. Note: positive values indicate forces in a posterior direction and negative values indicate forces in an anterior direction.

Musculoskeletal model	Spinal joint	Mean (N)	Min.	Max.
5 th percentile female	Thoracic spine	-22.0	-30.8	-18.3
	Lumbar spine	-22.0	-30.8	-18.3
50 th percentile male	Thoracic spine	-31.4	-36.6	-26.5
	Lumbar spine	-31.4	-36.6	-26.5
95 th percentile male	Thoracic spine	0.4	-36.2	-12.4
	Lumbar spine	0.4	-36.2	-12.4

The results for wrist and elbow joint A/P shear forces are presented in Table VIII. Peak wrist and elbow joint A/P shear forces were lowest for the 50th percentile male and highest for the 95th percentile male (Figure 9). Peak wrist A/P shear forces were slightly lower than elbow shear forces for all the anthropometric cases.

Table VIII. Right wrist and elbow joint anterior/posterior (A/P) shear forces (N) for the 3 anthropometric cases. Note: positive values indicate forces in a posterior direction and negative values indicate forces in an anterior direction.

Musculoskeletal model	Joint	Mean (N)	Min.	Max.
5 th percentile female	Wrist	42.0	16.3	55.7
	Elbow	41.9	10.3	56.6
50 th percentile male	Wrist	29.7	16.6	42.8
	Elbow	29.7	10.2	43.8
95 th percentile male	Wrist	103.6	31.7	122.4
	Elbow	103.5	18.7	124.1

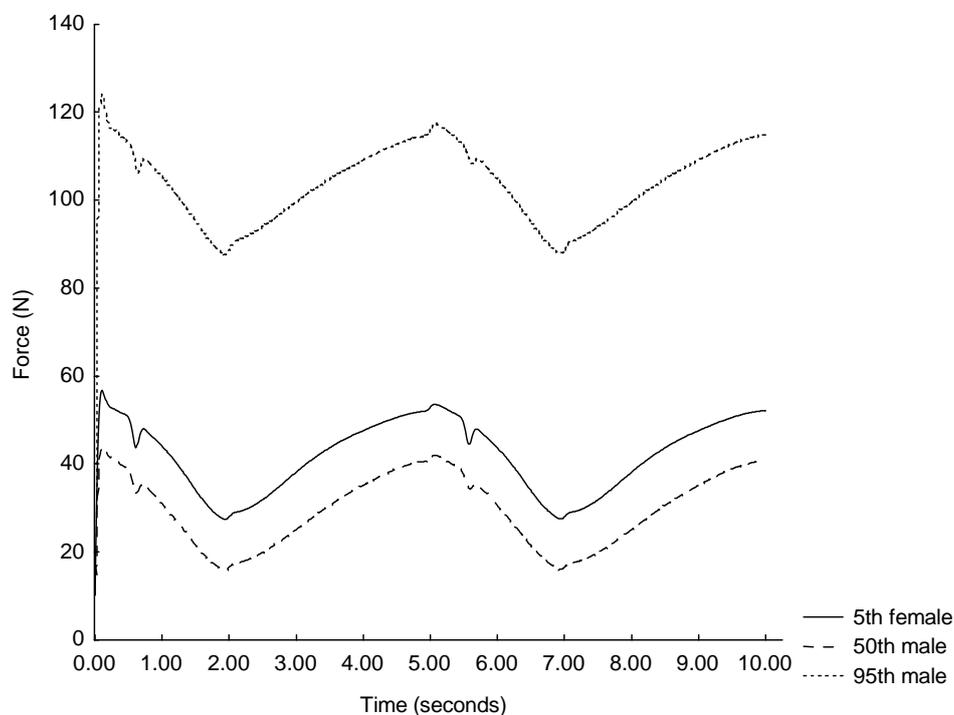


Figure 9. Right elbow anterior/posterior (A/P) shear forces (N) for the 3 anthropometric cases (2 repetitions).

Discussion

Firstly, it can be concluded from this study that the LifeModeler™ default model was not adequate to solve the forward dynamics simulations for any of the anthropometric cases. For the evaluation of the seated biceps curl exercise (first article in the series) the forward dynamics simulations could also only be solved

after a number of adjustments had been made to the model such as increasing pCSA of the muscles, manipulating muscle origins and insertions as well as decreasing the joint stiffness in the forwards dynamics simulations. All of these adjustments were implemented in order to solve the simulation without any success. Possible reasons for this could include the degrees of freedom involved in a multi joint exercise involving highly mobile joints such as the shoulder. Furthermore it could be that additional musculature is required to provide more stability in the shoulder joint during the forward dynamics simulations. In this study in order to solve this problem the joint angulations recordings in the inverse dynamics simulations were used to solve the forward dynamics simulations. This option creates a trained PID-servo type controller on the joint axis. The joint is commanded to track an angular history spline with a user-specified gain on the error between the actual angle and the commanded error. A user-specified derivative gain is specified to control the derivative of the error. Therefore, results for muscle forces (N) and contractions (shortening and lengthening) (mm) could not be analysed. Ideally these parameters should be analysed when evaluating an exercise. It appears that more complex, multi-joint or compound exercises that require too many degrees of freedom pose a problem for the default model and therefore models with more detailed musculature may be required to solve the forward dynamics simulations sufficiently. Important musculature required for the performance of the seated row exercise that are not included in the LifeModeler™ default model are the Rhomboideus major and minor and the Rotator cuff group (Supraspinatus, Infraspinatus, Teres minor and Subscapularis). It was not however within the scope of this study to produce anatomical detailed models but rather to evaluate the default model of the software.

Secondly, the study did not indicate any obvious anthropometric differences with regards to the seated row machine's engineered or manufactured adjustability. All three anthropometric cases appeared to be positioned adequately on the seated row machine. This was not the case with the modelling performed on the

seated biceps curl and abdominal crunch machines, which demonstrated the inability of the machines to adjust appropriately to individuals with small anthropometric dimensions such as some females and children. As a result the exercise technique of the 5th percentile female was negatively influenced and injury risk was increased for these exercises.

Lastly, with regards to the biomechanical evaluation in terms of exercise efficacy and injury risk the following could be deduced from the study. Due to the fact that the forward dynamics simulations for this study was solved by recording the joint angulations changes during the inverse dynamics simulations and not muscle length changes, results for the muscle forces and contractions were not obtained and therefore could not be analysed. This negatively influenced the value of modelling with regards to evaluating the seated row exercise as muscle forces and contractions provide important information regarding the efficacy and injury risk of the exercise.

Maximal joint torque values obtained for the wrist, elbow and shoulder appear to be plausible when comparing the values to peak values obtained by means of isokinetic testing at 60 degrees per second. For example wrist flexion/extension values of 13.8 Nm and 12.7 Nm respectively in non-disabled subjects (Van Swearingen, 1983). Elbow flexion/extension values of 36 Nm for both elbow flexion and extension in female college basketball players (Berg *et al.*, 1985) and shoulder flexion/extension values of 77 Nm and 53 Nm for males and 38 Nm and 24 Nm for females respectively in a group of non-disabled (Nicholas *et al.*, 1989). Joint torque values for the three joints evaluated were much lower than values obtained during peak isokinetic testing however it is important to bear in mind that the values obtained in this study were not obtained from maximal testing as with the isokinetic testing. The peak elbow joint torque was the highest recorded value for all the joints in the three anthropometric cases which was too be expected as the elbow joint is most involved in the seated row movement.

Not surprisingly, the joint range of motion (wrist, elbow and shoulder) used during the seated row exerciser was smallest for the 5th percentile female and greatest for the 95th percentile male. With the exception of the elbow joint range of motion which was greatest for the 50th percentile male. It is not only important that correct technique be used for resistance exercises such as the seated row exercise but also that exercisers are performed through the full range of motion in order to decrease the likely of injury as well as get the maximum benefits of the exercise. It therefore appears that the three anthropometric models performed the seated row exercise through the full range of motion.

Pushing and pulling as opposed to lifting activities might also be associated with significant risk to the low back (National Institute for Occupational Safety and Health, 1997, Hoozemans *et al.*, 1988). The seated row exercise can be considered a pulling activity. It must be kept in mind that the cited research is primarily referring to occupational tasks however important similarities and conclusions can be drawn with exercises that use similar actions to occupational tasks and activities that require pulling. Furthermore, the spine of the default model does not consist of all the individual vertebrae but rather of various segments that represent the different regions of the vertebral column with joints between these segments. Individualised vertebra and corresponding joints might produce different results.

In 2009 a study by Knapik and Marras (2009) found that there was greater compressive loading at all spine levels when performing pulling compared with pushing activities. Therefore, an individual performing a pulling exercise such as the seated row might be at more risk of a back injury as opposed to individuals performing a pushing exercise such as bench press specifically with regards to compressive loading.

Previous research from the American National Institute for Occupational Safety and Health (NIOSH) recommends that spinal compression forces should not

exceed 3.4 kN to avoid injury. However there is a very real threat of musculoskeletal injury before this failure limit value has been reached (Snook and Ciriello, 1991; Cooper and Ghassemieh, 2007, Knapik and Marras, 2009). British standards (BS EN 1005-3, 2002) recommend 600 N as the cut-off point for carrying masses, no further recommendations except “time of exposure needs to be minimised” and “a preferred system requires optimal ergonomic position with reduced back bending posture” are made. Therefore, all three anthropometric cases were well below the recommended failure limit of 3.4 kN. None of the anthropometric cases’ peak thoracic or lumbar compression forces were even near the recommended 600 N cut-off and therefore it may be postulated that all things considered the seated row exercise does not appear to cause excessive spinal compression forces that may put the individual at risk for an injury.

Historically, spine compression in the lower lumbar spine has been the variable of interest for risk to the low back during work and exercise training. However, during horizontal force application (pulling of the seated row exercise), it is expected that shear forces within the spine increase dramatically due to the application of force in the hands and the reaction of the trunk musculature. Thus shear forces may represent the critical measure of risk (Knapik and Marras, 2009). According to Knapik and Marras (2009), in general, pushing activities impose greater potentially risky A/P shear forces upon the spine than pulling. Pushing imposed up to 23% greater A/P shear forces compared to pulling. Increases in shear forces were a result of the increased flexor muscle coactivity required for the activity.

Although the spine A/P shear forces recorded were greater than the compression forces, the thoracic and lumbar spine joint A/P shear forces for the three anthropometric cases are also below the most commonly cited spine tolerance of 1000 N for shear force as stipulated by McGill (1996). It is important to note that even if the spine compression and A/P shear forces recorded were well within

the acceptable limits the modelling does not take into account the repetitive nature and accumulative effect of exercise. Furthermore, the resistance used was only 50% of each of the anthropometric cases' estimated 1RM and therefore if exercises use a resistance closer to their maximum the loading values may exceed the acceptable limits.

Handle height appears to affect the mechanical load at the low back and shoulder considerably and it is recommended that carts be designed and adjustable so that it is possible to push or pull at shoulder height (Hoozemans *et al.*, 2004). The same principle can be applied to the seated row machine and the handle bars should be at approximately shoulder height, which was the case for the three anthropometric models and thus this could have assisted in reducing the spine loads, especially the A/P shear spine forces. Unfortunately, after conducting a literature search it became clear that information regarding A/P shear forces of the shoulder, elbow and wrist joints is scarce. However, the following information regarding handle height may be applicable in terms of reducing A/P shear forces on these joints during the seated row exercise. Handle height and the magnitude of force were found to be significantly related to the net moment at the shoulder. Net moments at the shoulder are kept low during pushing and pulling activities by keeping the wrist, elbow, and shoulder close to the line of action of the exerted force or by directing the exerted force such that the shoulder joint remains close to the line of action of the exerted force (Hoozemans *et al.*, 1998). Thus, if the handle bars of the seated row resistance training machine are designed in such a way as to ensure correct alignment of the shoulder, elbow and wrist joints, it may assist in reducing the strain that these joints experience during this exercise, especially if a heavy resistance is used.

Conclusion

The limitations using the default model of the software was highlighted. Adjustments had to be made to the default model in order to solve the forward dynamics simulations using recorded joint angulations during the inverse

dynamics simulations. As a result no muscle (force and contraction) results could be obtained which negatively impacted the value of the modelling in evaluating the seated row exercise. The anthropometric dimensions of the end-users appeared to be adequately accommodated by the seated row's engineered or manufactured adjustability. Although pulling activities can pose a potential risk for spine injuries it did not appear as if the exercise put undue strain on the spinal structures when exercised with correct positioning and technique at an appropriate resistance.

References

Agnesina, G., Taiar, R., Havel, N., Guelton, K., Hellard, P., and Toshev, Y. (2006). BRG.LifeMOD™ modeling and simulation of swimmers impulse during a grab start. *Proceedings of the 9th symposium on 3D analysis of human movement*. Valenciennes.

Annegarn, J., Rasmussen, J., Savelberg, H.H.C.M., Verdijk, L.B., and Meijer, K. (2007) (accessed 2008). *Scaling strength in human simulation models*. www.anybodytech.com.

Berg, K., Blank, D., and Muller, M. (1985). Muscular fitness profile of female college basketball players. *Journal of Orthopaedic and Sports Physical Therapy*, **7**, 59 – 64.

Biomechanics Research Group, Inc. (2006). *LifeMOD biomechanics modeler manual*.

Bredenkamp, K. (2007). The characterisation of the male and female body forms of the SANDF. *ERGOTECH Document P0683/2007/01*. Centurion: ERGOnomics TECHNOlogies. South Africa.

BS EN 1005 – 3 (2002). *Safety of machinery – Human physical performance – Part 3: Recommended force limits for machinery operations*. London: British Standards Institute.

Cooper, G., and Ghassemieh, E. (2007). Risk assessment of patient handling with ambulance stretcher systems (ramp / winch), easy-loader, tail-lift using biomechanical failure criteria. *Medical Engineering & Physics*, **29**, 775 – 787.

Cronin, J.B., Jones, J.V., and Hagstrom, J.T. (2007). Kinematics and kinetics of the seated row and implications for conditioning, *Journal of Strength and Conditioning Research*, **21**(4), 1265 – 1270.

De Jongh, C. (2007). *Critical evaluation of predictive modelling of a cervical disc design*, Unpublished masters thesis, University of Stellenbosch.

Floyd, R.T. (2009). *Manual of structural kinesiology* (17th Ed). New York: McGraw-Hill.

Gordon, C.C., and Brantley, J.D. (1997). Statistical modelling of population variation in the head and face. *The design and integration of helmet systems International Symposium Proceedings*. Massachusetts, USA.

Heyward, V.H. (2004). *Advanced fitness assessment and exercise prescription (5th Ed.)*. Champaign: Human Kinetics.

Hofmann, M., Danhard, M., Betzler, N., Witte, K., and Edelmann, J. (2006). Modelling with BRG.lifeMODTM in sport science. *International Journal of Computer Science in Sport*, **5**.

Hoozemans, M.J.M., Kuijer, P.F.M., Kingma, I., Van Dieën, J.H., De Vries, W.H.K., van der Woude, L.H.V., Veefer, H.E.J., Van der Beek, A.J., and Frings-

Dresent, M.H.W. (2004). Mechanical loading of the low back and shoulders during pushing and pulling activities. *Ergonomics*, **47**(1), 1-18

Hoozemans, M.J.M., Van der Beek, A.J., Frings-Dresen, M.H.W, Van Dijk, F.J.H., and Van der Woude, L, H, V. (1998). Pushing and pulling in relation to musculoskeletal disorders: a review of risk factors. *Ergonomics*, **41**, 757 – 781.

Kim, H., and Martin, B.J. (2007). Estimation of body links transfer functions in vehicle vibration environment. *Proceedings of the 2007 digital human modelling for design and engineering conference*. Seattle.

Knapik, G.G., and Marras, W.S. (2009). Spine loading at different lumbar levels during pushing and pulling. *Ergonomics*, **52**(1): 60-70.

Luttgens, K., Deutsche, H., and Hamilton, N. (1992). *Kinesiology: scientific basis of human motion (8th Ed.)*. Dubuque: Brown and Benchmark.

McGill, S.M. (1996). Searching for the safe biomechanical envelope for maintaining healthy tissue, Pre-Meeting workshop, International Society for the Study of the Lumbar Spine: The Contribution of Biomechanics to the prevention and treatment of low back pain, University of Vermont, June 25.

National Institute for Occupational Safety and Health. (1997). Musculoskeletal disorders and workplace factors: a critical review of epidemiologic evidence for work-related musculoskeletal disorders of the neck, upper extremity, and low back. *US Department of Health and Human Services (DHHS) Public Health Service, Centres for Disease Control*. Cincinnati: National Institute for Occupational Safety and Health Division of Biomedical of Behavioural Science.

Nicholas, J.J., Robinson, L.R., Logan, A., and Robertson, R. (1989). Isokinetic testing in young non-athletic able-bodied subjects. *Archives of Physical Medicine and Rehabilitation*, **70**, 210 – 213.

Olesen, C.G., Andersen, M.S., Rathleff, M.S., de Zee, M., and Rasmussen, J. (2009). Understanding the biomechanics of medial tibial stress syndrome – a simulation study using a musculoskeletal model. *Proceedings of the 2009 International Society of Biomechanics*. Cape Town.

Rasmussen, J., de Zee, M., Damsgaard, M., Christensen, S.T., Marek, C., and Siebertz, K. (accessed 2008). *A general method for scaling musculo-skeletal models*. www.anybodytech.com.

Rietdyk, S., and Patla, A.E. (1999). Context-dependent reflex control: Some insights into the role of balance. *Experimental Brain Research*. **119**, 251 – 259.

RSA-MIL-STD-127. (2001). Ergonomic Design: Biomechanics – Specific functional body strength data standard. *RMSS Document*, **5**, 1 – 28.

RSA-MIL-STD-127. (2004). Ergonomic design: Anthropometry and environment. *RMSS Document*, **1**, 1 – 196.

Schillings, A.M., Van Wezel, B.M., and Duysens, J. (1996). Mechanically induced stumbling during human treadmill walking. *Journal of Neuroscience Methods*, **67**, 11 – 17.

Snook, S.H., and Ciriello, V.M. (1991). The design of manual handling tasks: revised tables of maximum acceptable weights and forces. *Ergonomics*, **34**: 1197-1213.

Van Swearingen, J.M. (1983). Measuring wrist muscle strength. *Journal of Orthopaedic and Sports Physical Therapy*, **4**, 217 – 228).

Wagner, D., Rasmussen, J., and Reed, M. (2007). Assessing the Importance of Motion Dynamics for Ergonomic Analysis of Manual Materials Handling Tasks using the AnyBody Modelling System. *Proceedings of the 2007 Digital Human Modelling for Design and Engineering Conference*. Seattle.

Zenk, R., Franz, M., and Bubb, H. (2005). Spine load in the context of automotive seating. *Proceedings of the 2007 digital human modelling for design and engineering conference*. Seattle.

CHAPTER 6

THREE DIMENSIONAL MUSCULOSKELETAL MODELLING OF THE CHEST PRESS RESISTANCE EXERCISE FOCUSING ON THE BIOMECHANICAL AND ANTHROPOMETRIC CONSIDERATIONS OF THE END-USER

Kim Nolte¹, Pieter E. Krüger¹, & P. Schalk Els²

¹*Department of Biokinetics, Sport and Leisure Sciences, University of Pretoria, Pretoria, South Africa,* ²*Department of Mechanical and Aeronautical Engineering, University of Pretoria, Pretoria, South Africa*

Abstract

The aim of this study was to evaluate whether three dimensional (3D) musculoskeletal modelling could be effective in assessing the safety and efficacy of exercising on a chest press resistance training machine. The focus of the evaluation was on biomechanical and anthropometric considerations of the end-user. Three anthropometric cases were created; these represented a 5th percentile female as well as a 50th and 95th percentile male based on body mass index (BMI). Resistance on the chest press machine was set at fifty percent of the functional strength one repetition maximum (1RM) for each anthropometric case, two repetitions were performed. The results indicate that adjustments had to be made to the default model in order to solve the forward dynamics simulations using recorded joint angulations during the inverse dynamics simulations. As a result no muscle (force and contraction) results could be obtained which negatively impacted the value of the modelling in evaluating the chest press exercise. The anthropometric dimensions of the end-users appeared to be adequately accommodated by the chest press's engineered or manufactured adjustability. Although pushing activities can pose a potential risk for spine injuries it did not appear as if the exercise put undue strain on the spinal structures when exercised with correct positioning and technique at an

appropriate resistance. However, the wrist joint and cervical spine appear to be vulnerable areas during the chest press exercise due to the relatively high wrist torque values in comparison to other joints as well as the relatively high cervical compression loads recorded. To conclude, although important design elements and flaws were highlighted by the 3D modelling in this series, mathematical and computer modelling does have its limitations especially when the default model is used.

Keywords: *Resistance training equipment, chest press, biomechanics, anthropometric, modelling, LifemodelerTM, inverse dynamics, forward dynamics*

Introduction

This article constitutes the fourth and last article in a series. The series consists of three dimensional (3D) musculoskeletal modelling with a focus on biomechanical and anthropometric variables of four commonly used pieces of resistance training equipment. Design of exercise equipment is a complicated task and warrants consideration of a series of biomechanical and ergonomics factors. Furthermore, there is inevitably increased loading on certain parts of the body due to the repetitive nature of exercises. Improvement in equipment design could reduce these hazards and offset such a negative effect on the body (Dabnichki, 1998). Currently, there is no regulation of exercise equipment design and production in South Africa. Therefore, a need exists to subject such pieces of equipment to evaluation methods of which the goal is to ensure the equipment's efficacy as well as the safety of the end-user.

Resistance training has emerged as an essential part of the individual's programme to improve performance, fitness, and even health. Although resistance training machines are expensive, they have several advantages over free weights: They are safer and more versatile, they save time, and they eliminate equipment theft. Using a machine also makes it much easier to change resistance as you move from one exercise to another. On the negative side, a machine restricts you to a set series of lifts and movements and you don't learn to balance the load as well (Sharkey and Gaskill, 2007). This article covers the evaluation of the open-kinetic-chain chest press resistance training exercise. Some of the most popular exercises in resistance training are those that work the chest musculature (Pectoralis major and Pectoralis minor). When developed properly, these muscles contribute a great deal to an attractive upper body and to added success in many recreational and athletic activities. Many chest exercises provide an added benefit because they also work muscles of the shoulder (Anterior deltoids) and upper arm (Triceps brachii) (Beachle and Groves, 1992).

Methods

Equipment

A 3D musculoskeletal full body model was created using LifeModeler™ software and incorporated into a multibody dynamics model of the chest press resistance exercise machine modelled in MSC ADAMS (Figure 1). The LifeModeler™ software runs as a plug-in on the MSC ADAMS software. LifeModeler™ software has previously been used in studies in the fields of sport, exercise and medicine (Schillings *et al.*, 1996; Rietdyk and Patla., 1999; Hofmann *et al.*, 2006; Agnesina *et al.*, 2006; De Jongh, 2007; Olesen *et al.*, 2009). It was decided to evaluate a default model as generated through the software. This model consists of 19 segments including a base set of joints for each body region. Specifically, the spine does not consist of individual vertebrae but rather of various segments that represent different regions of the vertebral column with joints between these segments. Furthermore, the default model has a full body set of 118 muscle elements attached to the bones at anatomical landmarks, which includes most of the major muscle groups in the body. Closed loop simple muscles were modelled. Closed loop muscles contain proportional-integral-differential (PID) controllers. The PID controller algorithm uses a target length-time curve to generate the muscle activation and the muscles follow this curve. Because of this approach, an inverse dynamics simulation using passive recording muscles is required prior to simulation with closed loop muscles. Simple muscles fire with no constraints except for the physiological cross-sectional area (pCSA), which designates the maximum force a muscle can exert. The graphs of simple muscle activation curves will generally peak at a flat force ceiling value (Biomechanics research group, 2006).

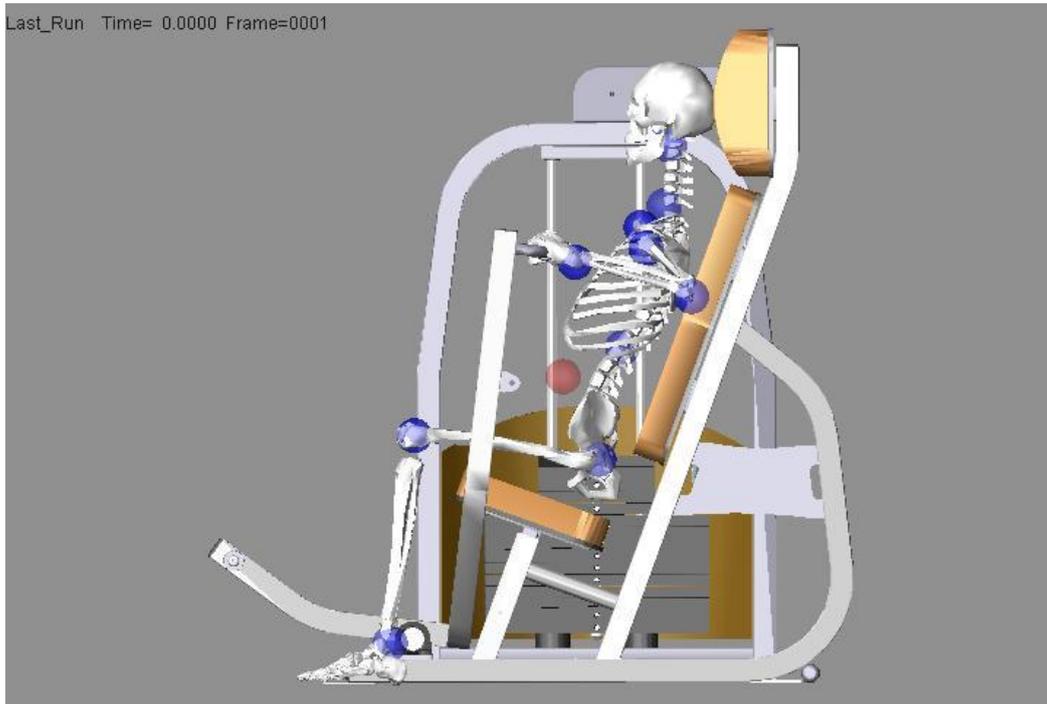


Figure 1. 3D musculoskeletal modelling of the chest press resistance training machine and 95th percentile male musculoskeletal model using LifeModeler™ and MSC ADAMS software.

Musculoskeletal full body human and chest press computer aided design (CAD) models

Three anthropometric cases were created for each piece of equipment. The human models were created using the GeBOD anthropometry database (default LifeModeler™ database) but were based on body mass index (BMI) data obtained from RSA-MIL-STD 127 Vol 1 (2004). This standard is a representative anthropometry standard of the South African National Defence Force (SANDF) which is kept current by a yearly sampling plan and is an accurate representation of the broader South Africa population. Bredenkamp (2007) described a process to characterize the body forms of SANDF males and females. Body form variances described by two principle components (PC's) for the SANDF males and two PC's for SANDF females were included in the modelling process. Positive and negative boundary cases of each PC, representing the boundary conditions to be accommodated in design (Gordon and Brantley, 1997), identified

the total range of four male and four female models. It was decided to use the cases representing the smallest female as well as an average and large male for the three anthropometric cases for this study. These cases could be seen as what are traditionally known as a 5th percentile female, 50th percentile male and a 95th percentile male based on the BMI of each of these cases. Thus, for the purpose of building these biomechanical models, a correlation between BMI and functional body strength was assumed. Similar assumptions have previously been made in biomechanics full body model simulations (Rasmussen *et al.*, 2007). A study by Annegarn *et al.* (2007) also verified scaled modelling strengths against actual functional body strengths and correlations ranged from 0.64 to 0.99.

This approach was followed in order to ensure that the equipment can accommodate an acceptable sample of the South African end-user population. A CAD model of the chest press resistance training machine was obtained from a South African exercise equipment manufacturing company. The model in a Parasolid file format was imported into the LifeModeler™ simulation software.

The Adams software was used to create two design variables in order to adjust the external resistance (as selected by the amount of weights when using a selectorised resistance training machine) and to specify the radius of the cam over which the cable of an actual exercise machine would run in order to lift the selected resistance. This was possible since this machine employed a circular cam system however, this would not be possible with exercise machines employing non-circular cam systems, in order to attain better mechanical advantage for the end-user. A special contact force (solid to solid) was created between the weights being lifted and the remainder of the weight stack during the simulation. A coupler joint was created linking the revolute joint (driver) of the lever arm attached to the handle bars with the translational joint of the weight stack. The design variable created for the radius of the cam was referenced as the scale of the coupled joint (translational joint at weights). The design variable

created for the mass of the weights was then adjusted according to the pre-determined resistance for each anthropometric case.

The external resistance applied in the models was based on data obtained from RSA-MIL-STD 127 Vol 5 (2001). This database consists of a range of human functional strength measurement variables for SANDF males and females. Due to its representivity this standard may be considered an accurate representation of the functional body strength of the South Africa population (RSA-MIL-STD-127, 2001). Furthermore, functional strength data was used from activities that most closely resembled the movements of the exercise as well as the muscle groups used during such movement. Fifty percent of the functional strength one repetition maximum (1RM) for each anthropometric case was used as this can be considered a manageable resistance to perform an exercise with appropriate form and technique for two repetitions.

Simulation

Extreme care was taken with the positioning of the musculoskeletal model onto the chest press machine to ensure technique, posture and positioning was correct according to best exercise principles (Table I). Furthermore, total manufacturer adjustability of the exercise machine was used in order to ensure correct positioning for each of the anthropometric cases. The following steps were performed in order to ensure realistic kinematics during the inverse dynamics simulations: 1) Positioning of the human model on the exercise equipment, 2) Adjustment of the posture to allow for the human machine interface to be created, 3) Creating the constraints between the human and machine, 4) Prescribing the motion of the repetitions, 5) Evaluation of the resultant kinematics, 6) Adjustment of joint positions until inverse dynamics resulted in a realistic exercise movement. Bushing elements were used to secure the lower torso to the seat as well as the neck to the back rest and spherical joints were used to connect the hands to the handle bars of the chest press machine. Bushing elements were preferred to fixed joint elements because

it allows for limited translational and rotational motion. Also, the amount of motion can be controlled by changing stiffness and damping characteristics in all three orthogonal directions. The original joints created in the biomechanical model had default joint parameters (Stiffness (K) =1E4, Dampening (C) =1000). Joints with such high joint stiffness are created to ensure a relatively “rigid” model that provides a stable and smooth motion when manipulated by motion splines. This is especially important during the movement of the model into the initial posture as well as to ensure smooth model motion during inverse dynamics. After the muscle lengths had been recorded in the inverse dynamics, the joint stiffness was changed to near zero, to represent actual stiffness in human joints.

The inverse dynamics – forward dynamics method was applied during the simulations. Inverse dynamics simulations are performed on models which are being manipulated by the use of motion agents or motion splines. During the inverse dynamics simulation, a rotational motion was applied to the revolute joint of the lever arm attached to the handle bars of the chest press machine in order to generate the required movement of the resistance training machine. This movement replicated the pulling (concentric) and resisting (eccentric) phase of the exercise. The time for the concentric phase was set at 1.66 seconds and the eccentric phase longer at 3.33 seconds to mimic conventional resistance training technique in which the downward phase is more deliberate to prohibit the use of momentum. The 1.66 second concentric phase included a STEP function approximation over 0.5 seconds to ensure a gradual start to the movement. The joints forces of the model were recorded during the inverse dynamics simulation in order to calculate the changes in joint torques to result in the required machine movement.

After the inverse dynamics simulation was performed, the rotational motion was removed from the rotational joint of the lever arm of the chest press machine. The resulting joint movements were then used to drive the model during the forward dynamics simulation in the manner as developed through the inverse

dynamics simulation. During the forward dynamics simulation the model is guided by the internal forces (muscle length changes resulting in joint angulations and torques) and influenced by external forces (gravity, contact and determined exercise resistance). It is important to note that changes had to be made to the LifeModeler™ default model in order to solve the models with plausible kinematics during the forward dynamics simulations. Considering the research problem the detail of these changes will be discussed under the discussions section. All results presented are derived from the forward dynamics simulations after these changes to the default model were made.

Table I. Exercise starting posture for the 3 anthropometric cases on the chest press machine. Results are presented for the sagittal, transverse and frontal planes (degrees). Note that F = flexion, E = extension, IR = internal rotation, AB = abduction and AD = adduction.

Joint	5 th percentile female	50 th percentile male	95 th percentile male
Scapula	0.0; 0.0; 0.0	0.0; 0.0; 0.0	0.0; 0.0; 0.0
Shoulder	20.0(E); 20.0(IR); 70.0(AB)	20.0(E); 20.0(IR); 74.0(AB)	20.0(E); 20.0(IR); 70.0(AB)
Elbow	125.0(F); 0.0; -5.0(AD)	125.0(F); 0.0; -5.0(AD)	125.0(F); 0.0; -5.0(AD)
Wrist	0.0; 10.0(IR); 0.0	0.0; 10.0(IR); 0.0	0.0; 10.0(IR); 0.0
Hip	68.0(F); 0.0; 10.0(AB)	85.0(F); 0.0; 10.0(AB)	93.0(F); 0.0; 10.0(AB)
Knee	55.0(F); 0.0; 0.0	85.0(F); 0.0; 0.0	85.0(F); 0.0; 0.0
Ankle	15.0(E); 0.0; 0.0	7.0(E); 0.0; 0.0	7.0(E); 0.0; 0.0
Upper neck	0.0; 0.0; 0.0	0.0; 0.0; 0.0	5.0(F); 0.0; 0.0
Lower neck	10.0(F); 0.0; 0.0	10.0(F); 0.0; 0.0	15.0(F); 0.0; 0.0
Thoracic	0.0; 0.0; 0.0	0.0; 0.0; 0.0	0.0; 0.0; 0.0
Lumbar	20.0(E); 0.0; 0.0	20.0(E); 0.0; 0.0	20.0(E); 0.0; 0.0

Data analysis

The anthropometric dimensions and exercise postures of the musculoskeletal human models were visually assessed in relation to the dimensions and adjustability of the resistance training equipment in order to determine if all three anthropometric cases representative of the South African end-user population could comfortably be accommodated on the chest press resistance training machine. Key aspects included start and end exercise posture as well as maintaining correct technique throughout the exercise during the simulations.

The kinematic and kinetic data from the simulations were analysed specifically in terms of exercise efficacy and peak muscular and joint force production of the prime movers of the chest press. Furthermore, the risk of injury to the musculoskeletal system of the exerciser was ascertained by comparison of measured forces with safe loading limits for joints of the lumbar and thoracic spine. The dynamic mode of analysis includes all the aspects of motion in the calculation of joint forces and internal stresses, including the effects introduced by changing velocity and acceleration components (Wagner *et al.*, 2007). Different joint loading criteria were derived using biomechanical research taking into consideration the posture and anthropometry (Cooper and Ghassemieh, 2007). However, criteria for determining whether a particular task or exercise is “safe” based on tissue-level stresses are available for only a small number of tissues and loading regimes (e.g. lower back motion segments in compression) (Wagner *et al.*, 2007).

Due to the nature of this study only basic descriptive statistics were performed by means of the STATISTICA© software package (Statsoft).

Results

Three anthropometric cases created for each piece of equipment based on BMI data obtained from RSA-MIL-STD 127 Vol 1 (2004) were used for the study and results were assessed (Table II). Table III represents the external resistance applied in the models, fifty percent of the functional strength 1RM for each anthropometric case was used for two repetitions.

Table II. Anthropometric details of population groups studied (RSA-MIL-STD, Vol 1, 2004).

User population group	Body mass (kg)	Stature (mm)
5 th percentile female	49.5	1500
50 th percentile male	65.0	1720
95 th percentile male	85.0	1840

Table III. User population strength data (RSA-MIL-STD, Vol 5, 2001).

User population group	User population group exercise resistance (50% 1RM) kg
5 th percentile female	7
50 th percentile male	19
95 th percentile male	35

Due to the involvement of wrist, elbow and shoulder joints in the chest press exercise, torque values for these joints are presented in Table IV. Values for the right side of the body are reported on as theoretically the values of the left and right side should be similar. Peak wrist torque values in comparison with the other joints were the highest for all the cases studied except the 95th percentile male. Peak shoulder torque values in comparison with the other joints were the lowest in the 5th percentile female and 50th percentile male. The lowest peak joint torque for the 95th percentile male was for the wrist. The 5th percentile female recorded the highest peak joint torque values for the wrist and elbow and the 95th percentile male for the shoulder (Figure 2).

Table IV. Right wrist, elbow and shoulder torque (Nm) results in the sagittal plane for the 3 anthropometric cases. Note that the torque values presented in the Figures are in Nmm due to the default units of the modelling software.

Musculoskeletal model	Joint	Mean (Nm)	Min.	Max.
5 th percentile female	Wrist	1.3	-1.3	6.5
	Elbow	4.2	0.0	6.1
	Shoulder	0.7	0.0	1.1
50 th percentile male	Wrist	0.8	-0.2	3.3
	Elbow	1.0	-0.7	2.3
	Shoulder	1.0	0.0	1.2
95 th percentile male	Wrist	3.1	-6.8	2.7
	Elbow	2.0	-0.2	2.9
	Shoulder	1.8	-0.2	3.0

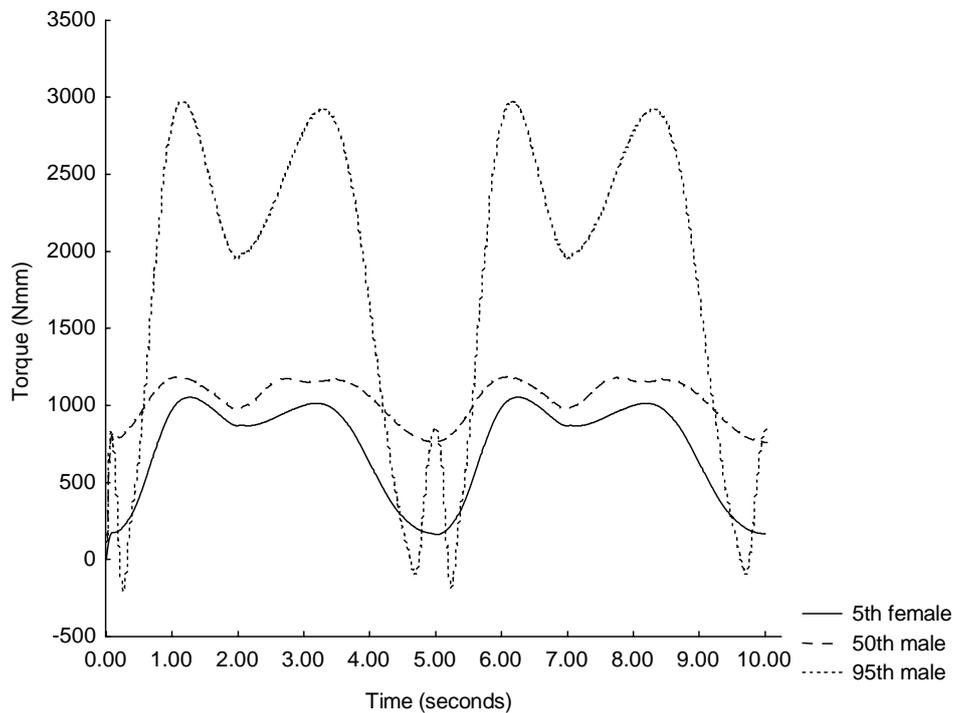


Figure 2. Sagittal right elbow joint torque (Nmm) for the 3 anthropometric cases (2 repetitions).

The chest press exercise is a multi-joint exercise thus movement in the sagittal plane of the shoulder, elbow and wrist are reported on (Table V). The least movement occurred at the wrist joint, followed by the shoulder joint with the most movement occurring at the elbow joint for the three anthropometric cases (Figure 3).

Table V. Sagittal right wrist, elbow and shoulder joint angle (°) for the 3 anthropometric cases.

Musculoskeletal model	Joint	Mean (degrees)	Min.	Max.
5 th percentile female	Wrist	4.4	-0.4	8.6
	Elbow	-105.0	-125.0	-76.7
	Shoulder	16.4	13.7	20.0
50 th percentile male	Wrist	2.8	-3.5	7.1
	Elbow	-103.4	-125.0	-73.1
	Shoulder	17.6	15.7	20.0
95 th percentile male	Wrist	3.0	-3.6	7.9
	Elbow	-102.3	-125.1	-68.6
	Shoulder	16.6	13.9	20.0

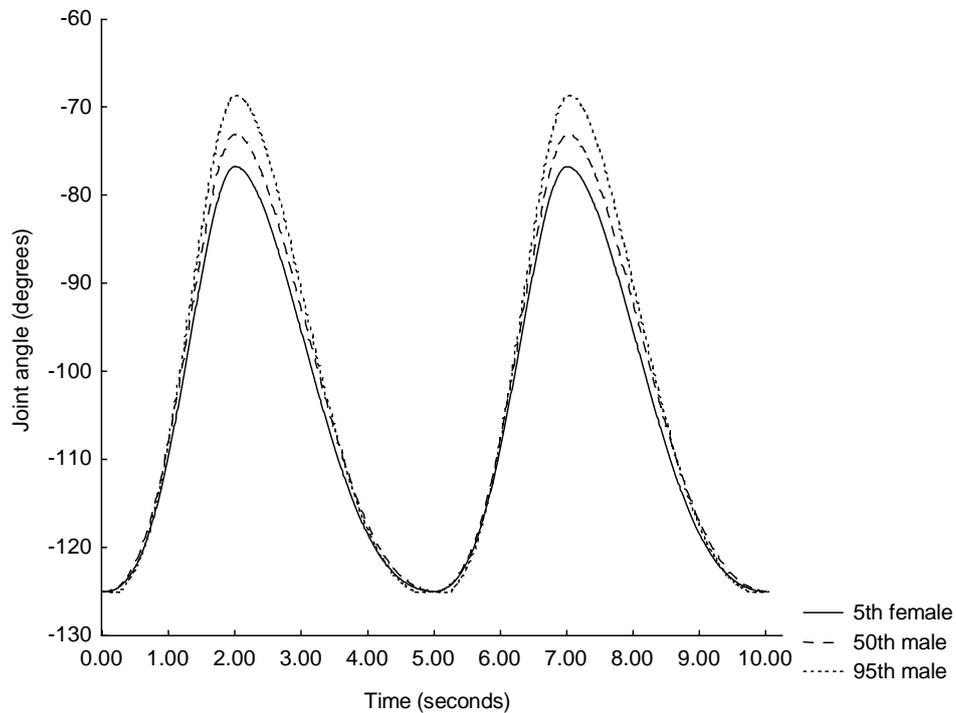


Figure 3. Sagittal right elbow angle (°) for the 3 anthropometric cases (2 repetitions). Note: negative joint angle indicates elbow flexion.

Results for cervical (C7/T1), thoracic (T12/L1 intervertebral joint) and lumbar (L5/S1 intervertebral joint) spine compression and anterior/posterior (A/P) shear forces are presented in Tables VI and VII respectively. Peak thoracic and lumbar spine joint compression forces were greatest for the 50th percentile male. While peak cervical spine joint compression was the highest for the 95th percentile male (Figure 4). In all the anthropometric cases the peak thoracic compression forces were the lowest, followed by the peak lumbar compression forces and the highest peak compression forces were recorded in the cervical spine.

Table VI. Cervical, thoracic and lumbar spine joint compression forces (N) for the 3 anthropometric cases. Note: positive values indicate forces in a superior direction and negative values indicate forces in an inferior direction.

Musculoskeletal model	Spinal joint	Mean (N)	Min.	Max.
5 th percentile female	Cervical spine	-486.3	-590.2	-372.0
	Thoracic spine	100.3	79.4	149.1
	Lumbar spine	145.0	124.1	193.8
50 th percentile male	Cervical spine	-467.1	-538.0	-329.0
	Thoracic spine	140.0	113.7	168.1
	Lumbar spine	200.0	173.2	227.6
95 th percentile male	Cervical spine	852.5	1248	474.0
	Thoracic spine	-32.7	-97.1	162.8
	Lumbar spine	28.2	-36.1	223.9

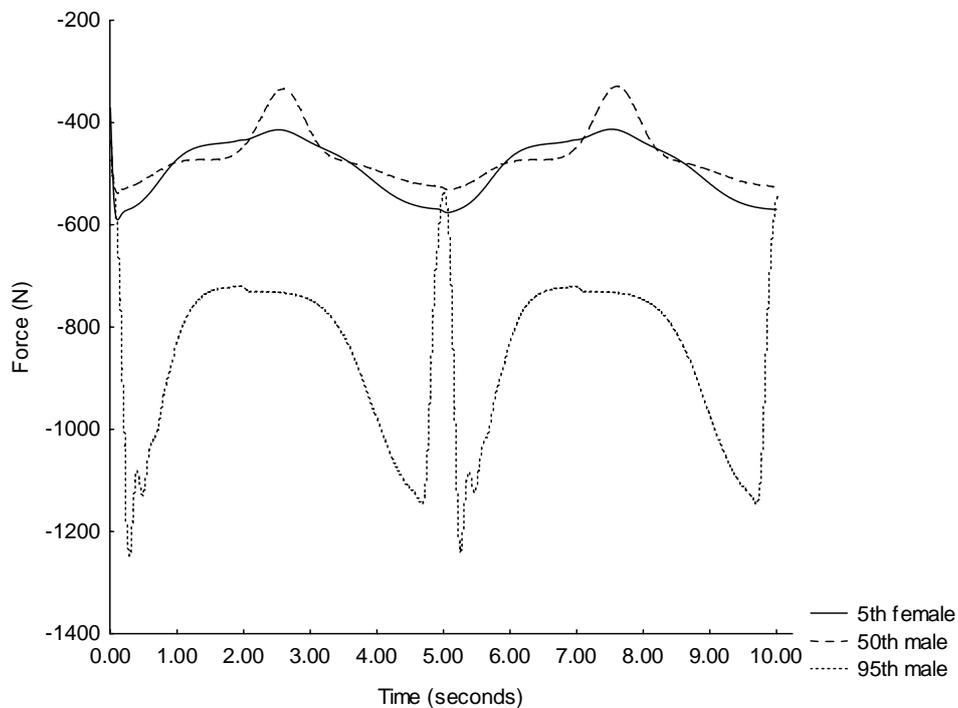


Figure 4. Cervical compression forces (N) for the 3 anthropometric cases (2 repetitions).

In all the joints except the cervical spine, the 95th percentile male had the highest peak A/P shear forces, followed by the 5th percentile female and lastly the 50th percentile male recorded the lowest A/P shear forces. The 5th percentile female recorded the highest cervical spine A/P shear forces and the 95th percentile male the lowest. The cervical peak A/P shear forces were the highest in comparison

with the thoracic and lumbar spine joints for the 5th percentile female and 50th percentile male (Figure 5).

Table VII. Cervical, thoracic and lumbar spine joint anterior/posterior (A/P) shear forces (N) for the 3 anthropometric cases. Note: positive values indicate forces in a posterior direction and negative values indicate forces in an anterior direction.

Musculoskeletal model	Joint	Mean (N)	Min.	Max.
5 th percentile female	Cervical spine	-486.4	-590.2	-372.0
	Thoracic spine	-311.7	-385.4	-232.3
	Lumbar spine	-266.9	-340.6	-187.6
50 th percentile male	Cervical spine	-467.1	-538.0	-328.9
	Thoracic spine	-280.8	-336.5	-148.1
	Lumbar spine	-221.3	-277.0	-88.6
95 th percentile male	Cervical spine	-66.0	-155.1	-18.3
	Thoracic spine	267.6	-400.8	128.2
	Lumbar spine	267.6	401.0	128.2

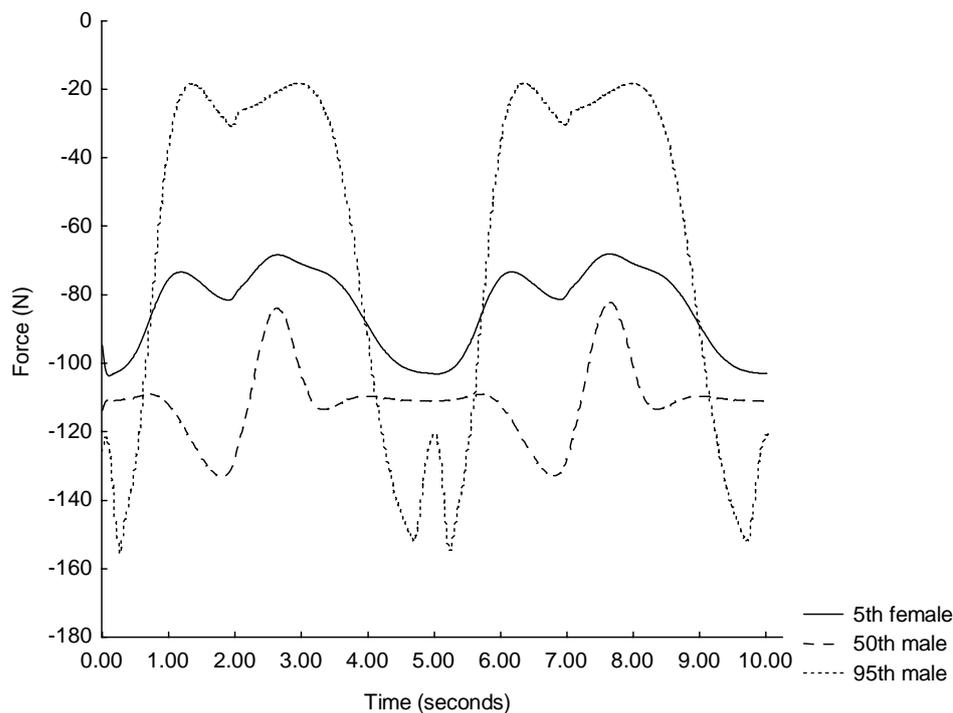


Figure 5. Cervical anterior/posterior (A/P) shear forces (N) for the 3 anthropometric cases (2 repetitions).

Results for wrist and elbow joint (right side) A/P shear forces are presented in Table VIII. Peak wrist and elbow joint A/P shear forces were lowest for the 50th percentile male and highest for the 95th percentile male (Figure 6). Peak wrist A/P shear forces were slightly lower than elbow shear forces for all the anthropometric cases.

Table VIII. Right wrist and elbow joint anterior/posterior (A/P) shear forces (N) for the 3 anthropometric cases. Note: positive values indicate forces in a posterior direction and negative values indicate forces in an anterior direction.

Musculoskeletal model	Joint	Mean (N)	Min.	Max.
5 th percentile female	Wrist	-26.3	-31.7	-7.1
	Elbow	-26.3	-32.3	-3.5
50 th percentile male	Wrist	-4.3	-14.4	6.8
	Elbow	-4.3	-15.0	7.4
95 th percentile male	Wrist	-100.9	-118.2	-9.2
	Elbow	-100.8	-120.7	-7.4

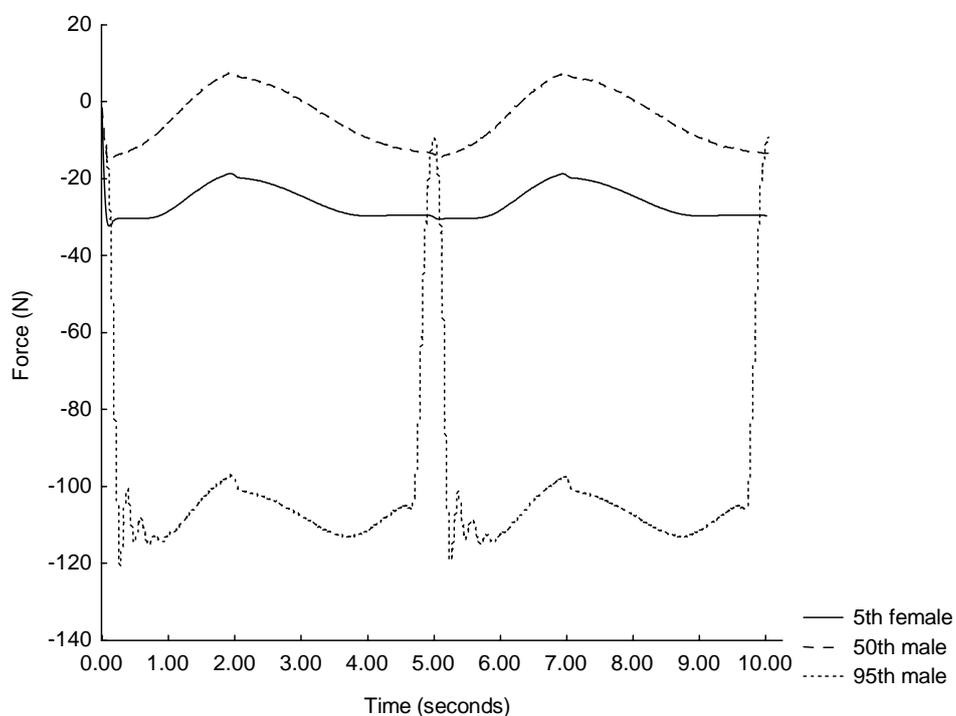


Figure 6. Elbow anterior/posterior (A/P) shear forces (N) for the 3 anthropometric cases (2 repetitions).

Discussion

It can be concluded from this study that the LifeModeler™ default model was not adequate to solve the forward dynamics simulations for any of the anthropometric cases. In the previous article (3) in this series which covered the evaluation of the seated row exercise, the same problem was encountered and the forward dynamics had to be solved by recording joint angulations in the inverse dynamics simulation. The same solution was made use of in this study. Possible reasons for this could include the degrees of freedom involved in a multi joint exercise involving highly mobile joints such as the shoulder. Furthermore it could be that additional musculature is required to provide more stability in the shoulder joint during the forward dynamics simulations. In this study in order to solve this problem the joint angulations recordings in the inverse dynamics simulations were used to solve the forward dynamics simulations. This option creates a trained PID-servo type controller on the joint axis. The joint is commanded to track an angular history spline with a user-specified gain on the error between the actual angle and the commanded error. A user-specified derivative gain is specified to control the derivative of the error. Therefore, results from muscle forces (N) and contraction (shortening and lengthening) (mm) could not be analysed. Ideally these parameters should be analysed when evaluating an exercise. It appears that more complex, multi-joint or compound exercises that require too many degrees of freedom such as the chest press and seated row exercise pose a problem for default model and therefore models with more detailed musculature may be required to solve the forward dynamics simulations sufficiently. Important musculature required for the performance of the chest exercises that are not included in the LifeModeler™ default model are the Serratus anterior, Coracobrachialis and Anconeus. It was not however within the scope of this study to produce anatomical detailed models but rather to evaluate the default model of the software.

Secondly, resistance training machines often can isolate muscle groups or joints while minimising extraneous body movements. Achieving this benefit requires

that each individual be properly fitted, which may be a problem for certain populations. Children and small adults might not be able to adjust to the dimensions of the machine (National Strength and Conditioning Association, 1985). This study did not highlight any obvious anthropometric differences with regards to the chest press machine's engineered or manufactured adjustability. All three anthropometric cases appeared to be positioned adequately on the chest press machine. This was not the case in the modelling performed on the seated biceps curl and abdominal crunch machines, which demonstrated the inability of the machines to adjust appropriately to individuals with small anthropometric dimensions such as some females and children. As a result the exercise technique was negatively influenced and injury risk was increased for these exercises.

Lastly, with regards to the biomechanical evaluation in terms of exercise efficacy and injury risk the following could be deduced from the study. Due to the fact that the forwards dynamics simulations for this study were solved by recording the joint angulations changes during the inverse dynamics simulations and not muscle length changes. Results for the muscle forces and contractions were not obtained therefore could not be analysed. This negatively influenced the value of modelling with regards to evaluating the chest press exercise as muscle forces and contractions provide important information regarding the efficacy and injury risk of the exercise.

Joint torque values obtained for the wrist, elbow and shoulder appear to be plausible when comparing the values to peak values obtained by means of isokinetic testing at 60 degrees per second. For example, wrist flexion/extension values of 13.8 Nm and 12.7 Nm respectively in non-disabled subjects (Van Swearigen, 1983). Elbow flexion/extension values of 36 Nm for both elbow flexion and extension in female college basketball players (Berg *et al.*, 1985) and shoulder flexion/extension values of 77 Nm and 53 Nm for males and 38 Nm and 24 Nm for females respectively in a group of non-disabled (Nicholas *et al.*, 1989).

Joint torque values for the three joints evaluated were much lower than values obtained during peak isokinetic testing however it is important to bear in mind that the values obtained in this study were not from maximal testing such as the isokinetic testing. Interestingly, the peak wrist joint torque was the highest recorded value for all the joints in the anthropometric cases except the 95th percentile male which indicate the important role the wrist plays in the chest press or similar pushing movements. In contrast, the elbow produced the highest torque in the seated row exercise which is a pulling movement. Therefore, the results imply that proper alignment of the wrists during the chest press exercise may be important in an exercise such as the chest press because of the higher torque values produced by this joint.

The elbow joint range of motion was the greatest in comparison with the shoulder and wrist for the three anthropometric cases studied. This was to be expected as most of the movement that occurs in a chest press exercise is as a result of elbow extension produced by the elbow extensors, Triceps brachii and Anconeus muscles (Floyd, 2009).

Pushing and pulling as opposed to lifting activities might also be associated with significant risk to the low back (National Institute for Occupational Health, 1997, Hoozemans *et al.*, 1998). The chest press exercise can be considered a pushing activity. It must be kept in mind that the cited research is primarily referring to occupational tasks however important similarities and conclusions can be drawn with exercises that use similar actions to occupational tasks and activities that require pulling. Furthermore the spine of the default model does not consist of all the individual vertebrae but rather of various segments that represent the different regions of the vertebral column with joints between these segments. Individualised vertebra and corresponding joints might produce different results.

In 2009 a study by Knapik and Marras (2009) found that there was greater compressive loading at all spine levels when performing pulling compared with

pushing activities. Therefore, one would expect the bench press (pushing action) exercise to be possibly safer than an exercise such as the seated row (pulling action) with respect to spine compression forces.

Previous research from the American National Institute for Occupational Safety and Health (NIOSH) (1997) recommends that spinal compression forces should not exceed 3.4 kN to avoid injury. However there is a very real threat of musculoskeletal injury before this failure limit value has been reached (Snook and Ciriello, 1991; Cooper and Ghassemieh, 2007, Knapik and Marras, 2009). British standards (BS EN 1005-3, 2002) recommend 600 N as the cut-off point for carrying masses, no further recommendations except “time of exposure needs to be minimised” and “a preferred system requires optimal ergonomic position with reduced back bending posture” are made. Therefore, all three anthropometric cases were well below the recommended failure limit of 3.4 kN. However, the cervical spine compression forces of the 50th percentile male and 5th percentile female were near the recommended cut-off of 600 N and the 95th percentile male exceeded the cut-off. It should be noted that the significantly higher forces recorded for the 95th male are considered to be an artefact of the constraint that was used in order to secure the head to the head-rest of the equipment. While it is not clear why the use of this constraint did not produce similar results in the other two models it may be that slight differences in positioning of the constraint could be the cause of the different results. The use of the constraint was however deemed necessary since the kinematics during the forward dynamics simulation was not acceptable without it. Without the constraint there was an unnatural movement in the chest region of the models. Considering the results of the 5th percentile female and the 50th percentile male it should still be noted that the chest press exercise appear to put the user at risk for injury in the cervical region.

Historically, spine compression in the lower lumbar spine has been the variable of interest for risk to the low back during work and exercise training. However,

during horizontal force application (pushing of the chest press exercise), it is expected that shear forces within the spine increase dramatically due to the application of force in the hands and the reaction of the trunk musculature. Thus shear forces may represent the critical measure of risk (Knapik and Marras, 2009). According to Knapik and Marras (2009), in general, pushing activities impose greater potentially risky A/P shear forces upon the spine than pulling. Pushing imposed up to 23% greater A/P shear forces compared to pulling. Increases in shear forces were a result of the increased flexor muscle coactivity required for the activity. During extension (as in lifting a weight), the large erector spinae muscles can provide much of the power required for the lift. However during pushing, the flexor muscles that have a much more limited physiological cross-sectional area (pCSA) must generate internal force. In order to generate the required force, much greater co-activations of the muscle flexors are necessary. Since many of the oblique flexor muscles have a large horizontal muscle fibre orientation, these muscles produce significant shear forces (Knapik and Marras, 2009).

Although the peak spine A/P shear forces recorded were in general greater than the peak compression forces in this study, the cervical, thoracic and lumbar spine joint A/P shear forces for the three anthropometric cases are below the most commonly cited spine tolerance of 1000 N for shear force as stipulated by McGill (1996). It is important to note however that although the spine compression and A/P shear forces recorded were well within the acceptable limits the modelling does not take into account the repetitive nature and accumulative effect of exercise. Furthermore, the resistance used was only 50% of each of the anthropometric cases' estimated 1RM and therefore if exercises use a resistance closer to their maximum the loading values may exceed the acceptable limits.

Handle height appears to affect the mechanical load at the low back and shoulder considerably and it is recommended that carts be designed and adjustable so that it is possible to push or pull at shoulder height (Hoozemans *et*

al., 2004). The same principle can be applied to the chest press machine and the handle bars should be at approximately shoulder height, which was the case for the three anthropometric models and thus this could have assisted in reducing the spine loads, especially the A/P shear spine forces. Unfortunately, after conducting a literature search it became clear that information regarding A/P shear forces of the shoulder, elbow and wrist joints is scarce. However, the following information regarding handle height may be applicable in terms of reducing A/P shear forces on these joints during the chest press exercise. Handle height and the magnitude of force were found to be significantly related to the net moment at the shoulder. Net moments at the shoulder are kept low during pushing and pulling activities by keeping the wrist, elbow, and shoulder close to the line of action of the exerted force or by directing the exerted force such that the shoulder joint remains close to the line of action of the exerted force (Hoozemans, *et al.*, 1998). Thus, alignment of the shoulder, elbow and wrist joints should be considered when designing the handle bars of chest press resistance training exercise machines which could assist in reducing shoulder strain during the exercise, especially when a heavy resistance is used.

Conclusion

Adjustments had to be made to the default model in order to solve the forward dynamics simulations using recorded joint angulations during the inverse dynamics simulations. As a result no muscle (force and contraction) results could be obtained which negatively impacts the value of the modelling in evaluating an exercise. The anthropometric dimensions of the end-users appeared to be adequately accommodated by the chest press's engineered or manufactured adjustability. Although pushing activities can pose a potential risk for spine injuries it did not appear as if the exercise put undue strain on the spinal structures when exercised with correct positioning and technique at an appropriate resistance. However, the wrist joint and cervical spine appear to be vulnerable areas during the execution of the chest press exercise due to the relatively high wrist joint torques produced in comparison to other joints as well

as the reasonably high cervical compression loads recorded for the three anthropometric cases.

Finally to conclude this series, 3D musculoskeletal modelling was able to highlight some important design elements and flaws as well as biomechanical and anthropometrical limitations of the four pieces of resistance training machines evaluated in this series. It was demonstrated that anthropometric dimensions of the end-user must be taken into account by the designer and manufacturers of exercise equipment. Failure to do this can place the exerciser at risk for injury and reduce the benefits from using the exercise. Mathematical and computer modeling does however have its limitations especially when the default model is used. 3D musculoskeletal modeling is certainly the way of the future and with the developments and improvements that are continually being made will probably form a major role in the design of most types of equipment.

References

Agnesina, G., Taiar, R., Havel, N., Guelton, K., Hellard, P., and Toshev, Y. (2006). BRG.LifeMOD™ modeling and simulation of swimmers impulse during a grab start. *Proceedings of the 9th symposium on 3D analysis of human movement*. Valenciennes.

Annegarn, J., Rasmussen, J., Savelberg, H.H.C.M., Verdijk, L.B., and Meijer, K. (2007) (accessed 2008). *Scaling strength in human simulation models*. www.anybodytech.com.

Beachle, T.R., and Groves, B.R. (1992). *Weight training. Steps to success*. Champaign: Human Kinetics.

Berg, K., Blank, D., and Muller, M. (1985). Muscular fitness profile of female college basketball players. *Journal of Orthopaedic and Sports Physical Therapy*, **7**, 59 – 64.

Biomechanics Research Group, Inc. (2006). *LifeMOD biomechanics modeler manual*.

Bredenkamp, K. (2007). The characterisation of the male and female body forms of the SANDF. *ERGOTECH Document P0683/2007/01*. Centurion: ERGOnomics TECHNOlogies. South Africa.

BS EN 1005 – 3 (2002). *Safety of machinery – Human physical performance – Part 3: Recommended force limits for machinery operations*. London: British Standards Institute.

Cooper, G., and Ghassemieh, E. (2007). Risk assessment of patient handling with ambulance stretcher systems (ramp / winch), easy-loader, tail-lift using biomechanical failure criteria. *Medical Engineering & Physics*, **29**, 775 – 787.

Dabnichki, P. (1998). Biomechanical testing and sport equipment design. *Sports Engineering*, **1**, 93 – 105.

De Jongh, C. (2007). *Critical Evaluation of Predictive Modelling of a Cervical Disc Design*, Unpublished Masters thesis, University of Stellenbosch.

Floyd, R.T. (2009). *Manual of structural kinesiology* (17th Ed). New York: McGraw-Hill.

Gordon, C.C., and Brantley, J.D. (1997). Statistical modelling of population variation in the head and face. *The design and integration of helmet systems International Symposium Proceedings*. Massachusetts, USA.

Hofmann, M., Danhard, M., Betzler, N., Witte, K., and Edelmann, J. (2006). Modelling with BRG.lifeMOD™ in sport science. *International Journal of Computer Science in Sport*, **5**.

Hoozemans, M.J.M., Van der Beek, A.J., Frings-Dresen, M.H.W, Van Dijk, F.J.H., and Van der Woude, L, H, V. (1998). Pushing and pulling in relation to musculoskeletal disorders: a review of risk factors. *Ergonomics*, **41**, 757 – 781.

Hoozemans, M.J.M., Kuijer, P.F.M., Kingma, I., Van Dieën, J.H., De Vries, W.H.K., van der Woude, L.H.V., Veefer, H.E.J., Van der Beek, A.J., and Frings-Dresent, M.H.W. (2004). Mechanical loading of the low back and shoulders during pushing and pulling activities. *Ergonomics*, **47**(1), 1-18

Knapik, G.G., and Marras, W.S. (2009). Spine loading at different lumbar levels during pushing and pulling. *Ergonomics*, **52**(1): 60-70.

McGill, S.M. (1996). Searching for the safe biomechanical envelope for maintaining healthy tissue, Pre-Meeting workshop, *International Society for the Study of the Lumbar Spine: The Contribution of Biomechanics to the prevention and treatment of low back pain*, University of Vermont, June 25.

National Institute for Occupational Safety and Health. (1997). Musculoskeletal disorders and workplace factors: a critical review of epidemiologic evidence for work-related musculoskeletal disorders of the neck, upper extremity, and low back. *US Department of Health and Human Services (DHHS) Public Health Service, Centres for Disease Control*. Cincinnati: National Institute for Occupational Safety and Health Division of Biomedical of Behavioural Science.

National Strength and Conditioning Association. (1985). Position paper on pre-pubescent strength training. *National Strength and Conditioning Journal*, **7**, 27 – 31.

Nicholas, J.J., Robinson, L.R., Logan, A., and Robertson, R. (1989). Isokinetic testing in young non-athletic able-bodied subjects. *Archives of Physical Medicine and Rehabilitation*, **70**, 210 – 213.

Olesen, C.G., Andersen, M.S., Rathleff, M.S., de Zee, M., and Rasmussen, J. (2009). Understanding the biomechanics of medial tibial stress syndrome – A simulation study using a musculoskeletal model. *Proceedings of the 2009 International Society of Biomechanics*. Cape Town.

Rasmussen, J., de Zee, M., Damsgaard, M., Christensen, S.T., Marek, C., and Siebertz, K. (2007)(accessed 2008). *A general method for scaling musculo-skeletal models*. www.anybodytech.com.

Rietdyk, S., and Patla, A.E. (1999). Context-dependent reflex control: Some insights into the role of balance. *Experimental Brain Research*. **119**, 251 – 259.

RSA-MIL-STD-127. (2004). Ergonomic design: Anthropometry and environment. *RMSS Document*, **1**, 1 – 196.

RSA-MIL-STD-127. (2001). Ergonomic design: Biomechanics – Specific functional body strength data standard. *RMSS Document*, **5**, 1 – 28.

Schillings, A.M., Van Wezel, B.M., and Duysens, J. (1996). Mechanically induced stumbling during human treadmill walking. *Journal of Neuroscience Methods*, **67**, 11 – 17.

Sharkey, B.J., and Gaskill, S.E. (2007). *Fitness and Health: your complete guide to: aerobic fitness, muscular fitness, nutrition and weight control*. Champaign: Human Kinetics.

Snook, S.H., and Ciriello, V.M. (1991). The design of manual handling tasks: revised tables of maximum acceptable weights and forces. *Ergonomics*, **34**: 1197-1213.

Van Swearingen, J.M. (1983). Measuring wrist muscle strength. *Journal of Orthopaedic and Sports Physical Therapy*, **4**, 217 – 228).

Wagner, D., Rasmussen, J., and Reed, M. (2007). Assessing the importance of motion dynamics for ergonomic analysis of manual materials handling tasks using the AnyBody modelling system. *Proceedings of the 2007 Digital Human Modelling for Design and Engineering Conference*. Seattle.

Zenk, R., Franz, M., and Bubb, H. (2005). Spine load in the context of automotive seating. *Proceedings of the 2007 Digital Human Modelling for Design and Engineering Conference*. Seattle.

CHAPTER 7

SUMMARY, RECOMMENDATIONS AND GENERAL CONCLUSIONS

7.1 SUMMARY

The motivation for this study originated from a concern for the quality and apparent lack of scientific data that supports exercise equipment design and specification. Currently, there is no standard biomechanical evaluation protocol for exercise equipment and more specifically resistance training equipment. Therefore, a need exists to develop and implement a basic biomechanical evaluation protocol for exercise equipment. As a result the safety of the exerciser will be maximised and the efficacy of the exercise will also be enhanced.

Therefore, the goal of this study was to evaluate whether a three dimensional musculoskeletal modelling (3D) protocol is effective in assessing the safety and efficacy of resistance training equipment. The focus of the evaluations was on the biomechanical and anthropometric considerations of the end-user.

The study aimed to achieve the follow objectives:

- To develop an evaluation protocol through computer modelling for resistance training equipment. The protocol will include:
 - anthropometry evaluation,
 - biomechanical evaluation;
- To implement the evaluation protocol on four pieces of resistance training equipment;
- Identify potential risk for musculoskeletal injury;
- Make recommendations on how the equipment could be improved with regards to design in order to maximise safety and exercise efficacy; and

- Make recommendations regarding limitations of the evaluation protocol. Evaluate if the protocol is sensitive enough to highlight injury risk and limitations in equipment design.

The hypothesis of the study was:

3D musculoskeletal modelling focusing on biomechanical and anthropometric considerations of the end-user is effective in evaluating the overall design of resistance training equipment.

The main findings of this research effort, in relation to the objects presented are:

7.1.1 Develop an evaluation protocol through computer modelling for resistance training equipment focusing on biomechanical and anthropometric considerations of the end-user.

An evaluation protocol through computer modelling was established.

The process followed included the following steps for each piece of equipment:

- Gather anthropometric data and corresponding functional strength data;
- Import the body model;
- Create the soft tissues;
- Merging the CAD model of the resistance training machine with the body model;
- Positioning of the body model on the resistance training machine;
- Adding the applicable constraints to the model;
- Adding motion agents to the model;
- Running the equilibrium simulation;
- Running the inverse-dynamics simulation;
- Preparing the model for dynamic simulation;
- Running the parametric analysis;
- Completing a literature search on the relevant resistance training exercise as well as relevant literature on safe loading limits;

- Interrogating the results; and
- Concluding research findings.

Slight variations in the modelling procedure were necessary in order to complete the protocol successfully for each piece of resistance training equipment which is discussed under the implementation of the evaluation protocol.

7.1.2 To implement the evaluation protocol on four pieces of resistance training equipment.

The 3D musculoskeletal modelling protocol was applied to four pieces of resistance training equipment, namely the:

- Seated biceps curl;
- Abdominal crunch;
- Seated row; and
- Chest press

Each piece of equipment presented unique challenges. In three of the four studies (seated biceps curl, seated row and chest press resistance training exercises) the default model of the modelling software was not adequate to solve the forward dynamics simulations and thus adjustments had to be made to the default model in order to complete the modelling process. In order to solve this problem for the seated biceps curl resistance training exercise the following adjustments were made to the default model: 1) an increase in the physiological cross-sectional area (pCSA) of the three default elbow flexor muscles, 2) manipulate the muscle origins and insertions and 3) decrease the joint stiffness in the forward dynamics simulations. For the seated row and chest press resistance training exercises the joint angulations were recorded during the inverse dynamics simulations and the resulting joint torques were used to drive the model in the forward dynamics simulations. Unfortunately, as a result for these two exercises no muscle force or contraction results were obtained which impacted negatively on the value of the results received for the analysis of the

exercises. Additional challenges were encountered using the default model in the modelling process which is discussed under the limitations of the evaluation protocol.

7.1.3 Identify potential risk for musculoskeletal injury.

The modelling process by means of the LifeModeler™ software was able to identify some potential risk for musculoskeletal injury (Table 7.1). The abdominal crunch resistance training exercise demonstrated the most significant potential for risk for injury when performing the exercise. Unacceptable thoracic and lumbar spine joint compression as well as anterior/posterior A/P shear forces was recorded during the simulations and thus this exercise appears to place the exerciser at high risk for a back injury. Therefore, caution should be used when prescribing the exercise for the training of the abdominal muscles especially if the individual has a predisposing back problem or injury. High lumbar A/P shear forces were also recorded for the seated biceps curl resistance training exercise which also alluded to potential excessive strain to the low back. Furthermore, the wrist joint and cervical spine were identified as vulnerable areas when exercising on the chest press machine due to the results obtained during the chest press simulations. No substantial risk was identified for the seated row resistance training exercise when appropriate positioning, good exercise technique and a suitable resistance is used by the exerciser. Therefore, the modelling process does appear to be able to identify some potential risk for injury however to gain considerable value from the information obtained from the modelling process regarding injury risk it is necessary to have knowledge of safe loading limits to make an informative comparison. Such information is only available for a small number of tissues and loading regimes (e.g. lower back motion segments in compression). Another point of reflection is the fact that most of the available literature on tissue-level stresses is from research conducted on occupational activities.

In addition, the modelling does not take into consideration varying training status or muscular strength and endurance of individuals which could either increase or decrease the individuals risk for injury depending on which side of the continuum they find themselves. The repetitive nature of exercise is also an essential element that should be considered in order to suitably evaluate the safety of an exercise.

Table 7.1: Potential risk for musculoskeletal injury while performing exercise on the 4 resistance training machines.

Resistance training machine	Injury risk areas	Recorded maximal values	Safe loading limits	
Seated biceps curl	Lumbar spine (A/P shear)	5 th percentile female: 906.0 N 50 th percentile male: 1109.0 N 95 th percentile male: 1180.7 N	1000 N 1000 N 1000 N	
	Extended periods of maximum muscle tension (Biceps brachii long head)	5 th percentile female: 329.5 N 50 th percentile male: 267.7 N	- -	
Abdominal crunch	Thoracic spine (compression)	5 th percentile female: 11043.0 N 50 th percentile male: 4206.4 N	3400 N 3400 N	
		95 th percentile male: 4673.9 N	3400 N	
	Lumbar spine (compression)	5 th percentile female: 12580.2 N 50 th percentile male: 3388.6 N	3400 N 3400 N	
		95 th percentile male: 3664.2 N	3400 N	
	Thoracic spine (A/P shear)	5 th percentile female: 5827.9 N 50 th percentile male: 3201.3 N	1000 N 1000 N	
		95 th percentile male: 3067.0 N	1000 N	
	Lumbar spine (A/P shear)	5 th percentile male: 5122.3 N 50 th percentile male: 559.9 N	1000 N 1000 N	
		95 th percentile male: 436.8 N	1000 N	
Seated row	No vulnerable areas identified	-	-	
Chest press	Cervical spine (compression)	5 th percentile female: 590.2 N 50 th percentile male: 538.0 N 95 th percentile male: 1248.0 N	3400 N 3400 N 3400 N	
		Wrist (torque)	5 th percentile male: 6.5 Nm 50 th percentile male: 3.3 Nm	13.8 Nm 13.8 Nm
			95 th percentile male: 2.7 Nm	13.8 Nm

7.1.4 Make recommendations on how the equipment could be improved with regards to design in order to maximise safety and exercise efficacy.

It was once again demonstrated from this research effort that the anthropometric dimensions of the end-user must be taken into account when designing exercise

equipment. Two of the resistance exercise machines evaluated could not accommodate the anthropometric dimensions of the small (5th percentile) female namely; the seated biceps curl and the abdominal crunch resistance training machines. This discrepancy between her anthropometric dimensions and the machines engineered or manufactured adjustability appeared to place her at significant risk for a spine injury, specifically on the abdominal crunch resistance training machine. Further, as a result of anthropometric discrepancy it seemed as if the exercise (abdominal crunch resistance training exercise) was not successful at isolating her abdominal muscles thereby reducing the effectiveness of the exercise.

Therefore, results of this study indicate that the manufacturer of the resistance training exercise equipment used for this study has managed to accommodate the average as well as the very large end-user but not individuals with small anthropometric dimensions such as small adults or children. If these individuals exercise on the equipment they will not be able to adjust the equipment for optimal exercise posture and movement and therefore may not get the full benefits of the exercise or worse injure themselves.

Small alterations such as making an adjustable preacher curl “platform” for the seated biceps curl machine or adapting the foot rest for the abdominal crunch machine may contribute significantly to improving the overall design of the resistance exercise machines and therefore the safety and the efficacy of the end-user. Therefore, it appears as if the 3D musculoskeletal modelling protocol has the potential to make some recommendations regarding improvements in the design of the exercise training equipment.

Table 7.2: Recommended resistance training equipment design alterations.

Resistance training exercise	Problems identified regarding equipment design	Recommended alterations to equipment design
Seated biceps curl	Preacher curl “platform” not parallel with the seat Non-adjustable preacher curl “platform”	Alignment of preacher curl “platform” adjusted to ensure it is parallel with the seat Manufacture an adjustable (height) preacher curl “platform” An adjustable foot rest
Abdominal crunch	No foot rest Seat - limited adjustable range Non-adjustable foot rest (height) Non-adjustable crunch pad/cushion (height)	Increase range of adjustments for seat Manufacture an adjustable (height) foot rest Manufacture adjustable (height) crunch pad/cushion
Seated row	Seat - limited adjustable range No problems identified	Increase range of adjustments for seat Adjustable foot rest may be beneficial
Chest press	No problems identified	Adjustable foot rest may be beneficial

7.1.5 Make recommendations regarding limitations of the evaluation protocol. Evaluate if the protocol is sensitive enough to highlight injury risk and limitations in equipment design.

The 3D musculoskeletal modelling was able to highlight some interesting design elements and flaws as well as biomechanical and anthropometrical limitations of the evaluated resistance training machines. Thus, 3D musculoskeletal modelling can certainly be used to evaluate resistance training equipment design however the limitations as indicated by this study must be taken into consideration especially when using default models.

The following problems were encountered with the default model in the modelling process:

- The primary limitation of the default model of the software is that it lacks adequate bio-fidelity.
- The modelling can be a fairly time consuming process requiring a process of many iterations to be able to provide plausible results;
- Caution should be employed when using the default model to not assume that a matching anthropometry will result in reliable muscle strength capabilities;

this is further complicated by the significant variance in muscular strength between subjects of similar anthropometry due to differences in conditioning levels;

- To truly evaluate exercise efficacy all the important muscles that play a role in the movement should be present. It is possible to add muscles to the default model and then assess their relative contribution to the produced force (as a percentage of their maximal force generating capacity), however this can be time consuming and was not within the scope of this study;
- It is important to bear in mind when evaluating spine loads the spine of the default model does not consist of all the individual vertebrae but rather of various segments that represent the different regions of the vertebral column with joints between these segments. Thus, individualised vertebra and corresponding joints might produce different results; and
- It appears that more complex, multi-joint or compound exercises such as the chest press or seated row resistance training exercise pose a problem for the default model and therefore models with more detailed musculature may be required to solve the forward dynamics simulations sufficiently.

Therefore, the modelling process is a reasonably time intensive method even when adjustments do not have to be made to the default model as it is a process that requires many iterations to get the ideal musculoskeletal model completed and positioned appropriately on the resistance training equipment and when additional adaptations have to be made to the model it does not always prove a practical solution for the evaluation of the equipment. Furthermore, adequate training and in-depth knowledge of the software as well as biomechanical and functional anatomy expertise is essential not only to perform the modelling but to analyse the results. However, it is important to bear in mind that despite the challenges involved with the modelling process in comparison to other methods it is still a relatively simple, inexpensive and safe means for evaluating resistance training equipment design.

7.2 RECOMMENDATIONS FOR RESEARCH AND PRACTICE

Further the following recommendations for future research:

- Unless significant improvements are made to the default model of the Lifemodeler™ software. The application of the software using the default model is limited in terms of evaluating resistance training equipment. Further the iterations that need to be made during the modelling process to ensure valid and reliable results is time consuming and thus a more user-friendly and adequate software would also lend the process more practical for the evaluation of exercise equipment. A more detailed model than the default model may solve some these issues;
- Expertise with regards to the software as well as functional anatomy, biomechanics and exercise technique is crucial to make the evaluation process valuable;
- Ideally, norms and data on safe loading limits and injury risk should be established for a larger variety of tissue structures and loading regimes. Further, if more data was available on safe loading during exercises rather than only occupational activities would also increase the usefulness of the information obtained from the modelling process; and
- Evaluations and comparisons should be made with resistance training equipment from different manufacturers as well as exercises that train similar muscle groups. Valuable information can be gained regarding the safety and exercise efficacy between the exercises or pieces of equipment and recommendations can be made regarding exercise prescription.

7.3 GENERAL CONCLUSIONS

Accurate assessment of the risk of injuries and performance efficacy during exercise training and occupational activities as well as subsequent design of exercise equipment, effective prevention and treatment programmes depend,

amongst others, on an accurate estimation of biomechanical and anthropometric considerations of the end-user. Such knowledge can be acquired primarily by 3D musculoskeletal modelling as experimental attempts remain invasive, costly and limited. Unfortunately, currently 3D musculoskeletal modelling is still a fairly time consuming process requiring a process of many iterations in order to perform the modeling and providing plausible results. However, it is continually being improved and thus the limitations will hopefully be addressed thereby making the process of 3D musculoskeletal modelling more user-friendly and effective in evaluating various pieces of exercise equipment and thus ensuring the safety and efficacy of the exercise for the end-user. To conclude, it would appear as if the research hypothesis was proven correct. 3D musculoskeletal modelling is certainly the way of the future and will eventually probably play a major role in the design of most exercise equipment.


APPENDIX: PUBLICATION

This article was downloaded by: [University of Pretoria]

On: 06 July 2011, At: 02:25

Publisher: Routledge

Informa Ltd Registered in England and Wales Registered Number: 1072954 Registered office: Mortimer House, 37-41 Mortimer Street, London W1T 3JH, UK

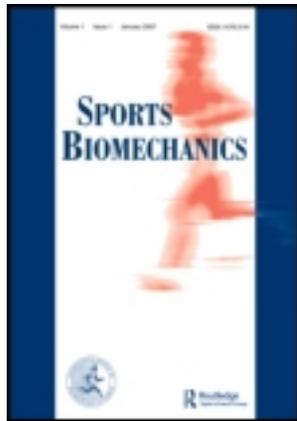

Sports Biomechanics

Publication details, including instructions for authors and subscription information:

<http://www.tandfonline.com/loi/rspb20>

Three dimensional musculoskeletal modelling of the seated biceps curl resistance training exercise

Kim Nolte^a, Pieter E. Krüger^a & P. Schalk Els^b

^a Department of Biokinetics, Sport and Leisure Sciences, University of Pretoria, Pretoria, South Africa

^b Department of Mechanical and Aeronautical Engineering, University of Pretoria, Pretoria, South Africa

Available online: 24 May 2011

To cite this article: Kim Nolte, Pieter E. Krüger & P. Schalk Els (2011): Three dimensional musculoskeletal modelling of the seated biceps curl resistance training exercise, Sports Biomechanics, 10:02, 146-160

To link to this article: <http://dx.doi.org/10.1080/14763141.2011.577441>

PLEASE SCROLL DOWN FOR ARTICLE

Full terms and conditions of use: <http://www.tandfonline.com/page/terms-and-conditions>

This article may be used for research, teaching and private study purposes. Any substantial or systematic reproduction, re-distribution, re-selling, loan, sub-licensing, systematic supply or distribution in any form to anyone is expressly forbidden.

The publisher does not give any warranty express or implied or make any representation that the contents will be complete or accurate or up to date. The accuracy of any instructions, formulae and drug doses should be independently verified with primary sources. The publisher shall not be liable for any loss, actions, claims, proceedings, demand or costs or damages whatsoever or howsoever caused arising directly or indirectly in connection with or arising out of the use of this material.



Three dimensional musculoskeletal modelling of the seated biceps curl resistance training exercise

KIM NOLTE¹, PIETER E. KRÜGER¹, & P. SCHALK ELS²

¹*Department of Biokinetics, Sport and Leisure Sciences, University of Pretoria, Pretoria, South Africa, and* ²*Department of Mechanical and Aeronautical Engineering, University of Pretoria, Pretoria, South Africa*

(Received 9 September 2010; accepted 24 March 2011)

Abstract

The aim of this study was to evaluate the benefits and limitations of using three dimensional (3D) musculoskeletal modelling (LifeModeler™) in assessing the safety and efficacy of exercising on a seated biceps curl resistance training machine. Three anthropometric cases were studied, representing a 5th percentile female, 50th percentile and 95th percentile male. Results indicated that the LifeModeler™ default model was not adequate to solve the forward dynamics simulations. Therefore adjustments had to be made to the default model to successfully complete the forward dynamics simulations. The software was able to sufficiently highlight the shortcomings of the biceps curl machine's engineered adjustability in relation to the anthropometric dimensions of the studied cases, as the 5th percentile female could not be accommodated suitably on the machine. High lumbar spine anterior/posterior shear forces for all anthropometric cases and maximum muscle tensions for the female and 50th percentile male indicate that the seated biceps curl exercise may pose risks for injuries. To conclude, it appears that 3D musculoskeletal modelling can be used to evaluate resistance training equipment such as the seated biceps curl machine. However the limitations as indicated by this study must be taken into consideration, especially when using the default LifeModeler™ model.

Keywords: *Forward dynamics, inverse dynamics, LifeModeler™, resistance training equipment, seated biceps curl*

Introduction

Design of exercise equipment is a complicated task and warrants consideration of a series of biomechanical and ergonomics factors. Furthermore, increased loading is inevitable on certain parts of the body due to the repetitive nature of exercises. Improvement in equipment design could reduce this hazard and offset such a negative effect on the body (Dabnichki, 1998).

Mathematical and computer modelling is suitable for a wide variety of applications such as the design, production and alteration of medical equipment (prostheses, orthopaedic and orthodontic devices) as well as sports and training equipment (Alexander, 2003; Kazlauskienė, 2006). Capable of simulating musculoskeletal human models interacting

Correspondence: K.Nolte, Department of Biokinetics, Sport and Leisure Sciences, University of Pretoria, Pretoria, South Africa, E-mail: kim.nolte@up.ac.za



with mechanical systems, three dimensional (3D) musculoskeletal modelling may be able to answer many questions concerning the effects of the resistance training equipment on the body. In addition, computer simulation models permit the study of the complex interactions between biomechanical variables (Kenny et al., 2005).

This study presents the musculoskeletal modelling of three anthropometric cases while exercising on a commercially available seated biceps curl resistance training machine. The biceps curl exercise is a commonly used, predominantly single joint, open kinetic exercise used to isolate the biceps muscles. The biceps brachii, brachialis and brachioradialis muscles contribute most to this action, with assistance from the pronator teres and wrist flexor group (Durall, 2004; Reiser et al., 2007). There are many variations of the traditional biceps curl exercise using dumb-bells, barbells and machines. Incline dumb-bell curl and dumb-bell preacher curl are two variations of the standard dumb-bell biceps curl generally applied to optimize the biceps brachii contribution during elbow flexion by fixing the shoulder angle at a specific position. These different protocols may impose different demands on the neuromuscular system, resulting in different solutions for the load sharing between elbow flexors (Oliveira et al., 2009). Regardless of variation, the biceps curl exercise can be divided into two phases: (1) lifting phase to flexed position and (2) lowering phase to extended position (Floyd, 2009).

Currently, there does not appear to be any regulation of exercise equipment design or production in either South Africa or internationally. Therefore, evaluation methods are needed to ensure the equipment's efficacy as well as the safety of the end-user. Thus the primary aim of this study was to evaluate the benefits and limitations of using 3D musculoskeletal modelling (LifeModeler™) in assessing the safety and efficacy of exercising on a seated biceps curl resistance training machine.

Methods

Software

A 3D musculoskeletal full body model was created using LifeModeler™ software and incorporated into a multibody dynamics model of the seated biceps curl exercise machine modelled in MSC ADAMS (Figure 1). The LifeModeler™ (San Clemente, USA) software runs as a plug-in on the MSC ADAMS software. LifeModeler™ software has previously been used in studies in the fields of sport, exercise and medicine (Schillings et al., 1996; Rietdyk & Patla, 1999; Agnesina et al., 2006; Hofmann et al., 2006; De Jongh, 2007; Olesen et al., 2009). The default model, as generated through the software, was evaluated. This model consists of 19 segments including a base set of joints for each body region. Every bone in the human body is included. Furthermore, the default model has a full body set of 118 muscles attached to the bones at anatomical landmarks, which includes most of the major muscle groups in the body. The muscles were created with trainable passive elements (Biomechanics Research Group, 2006).

Musculoskeletal full body human and seated biceps curl computer aided design (CAD) models

Models for the three anthropometric cases were created. The human models were created using the GeBOD anthropometry database (default LifeModeler™ database) but were based on body mass index (BMI) data obtained from RSA-MIL-STD-127 Vol 1 (2004)(Table I). This data is representative of the South African National Defence Force (SANDF) which is kept current by a yearly sampling plan and can be considered an accurate representation of

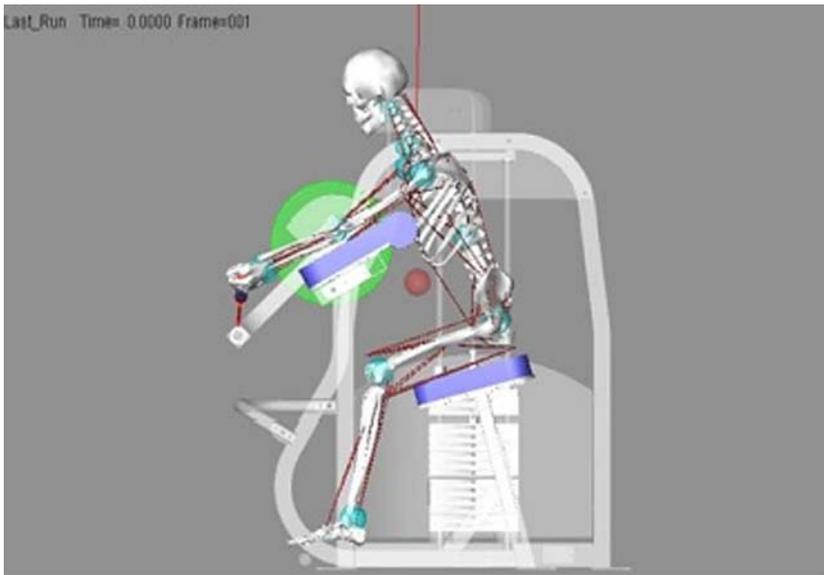


Figure 1. 3D musculoskeletal modelling of the biceps curl resistance training machine and 50th percentile male musculoskeletal model using LifeModeler™ and MSC ADMAS software.

the broader South Africa population. A process described by Bredenkamp (2007) was followed to characterize the body forms of SANDF males and females found in RSA-MIL-STD-127 Vol 1. This process identified variances in body form as identified by principal component analysis. Two principal components (PCs) for the SANDF males and females were included in the modelling process and presented the positive boundary case (being tall and thin) and the negative boundary case (being short and heavy). Positive and negative boundary cases represent the boundary conditions to be accommodated in design (Gordon & Brantley, 1997). A “small” female, an “average” male, and a “large” male were the three anthropometric cases chosen for this study. They are traditionally known as a 5th percentile female, 50th percentile male and a 95th percentile male based on the BMI. Thus, for the purpose of building these biomechanical models, a correlation between BMI and functional body strength was assumed. Similar assumptions have previously been made in biomechanics full body model simulations (Rasmussen et al., 2005). A study by Annegarn et al. (2007) also verified scaled modelling strengths against actual functional body strengths and correlations ranged from 0.64 to 0.99.

This approach was followed in order to test whether the exercise machine could accommodate the full spectrum of the South African end-user population. A CAD model of the seated biceps curl resistance training machine was obtained from a South African

Table I. Anthropometric and strength data of population groups studied (RSA-MIL-STD-127, Vol 1, 2004 and Vol 5, 2001).

User group	Body mass (kg)	Stature (mm)	User population group exercise resistance (50% 1RM) kg
5 th percentile female	49.5	1500	12
50 th percentile male	65.0	1720	22
95 th percentile male	85.0	1840	35

exercise equipment manufacturing company (Figure 2). The model in a Parasolid file format was imported into the ADAMS simulation software.

The Adams software was used to create two design variables in order to adjust the external resistance (as selected by the amount of weights when using a selectorized resistance training machine) and to specify the radius of the cam over which the cable of an actual exercise machine would run in order to lift the selected resistance. This was possible since this machine employed a circular cam system. A special contact force (solid to solid) was created between the weights being lifted and the remainder of the weight stack during the simulation. A coupler joint was created linking the revolute joint (driver joint) of the lever arm attached to the handle bars with the translational joint (coupled joint) of the weight stack (Figure 2). The design variable created for the radius of the cam was then referenced as part of the function of the coupler joint in calculating the external resistance, taking into account the resistance selected as well as the radius of the cam on the machine. The design variable created for the mass of the weights was then adjusted according to the pre-determined resistance for each anthropometric case, explained in the next section.

The external resistance applied in the models was based on data obtained from RSA-MIL-STD-127 Vol 5 (2001). This database consists of a range of human functional strength measurement variables for SANDF males and females. This standard may be considered an accurate representation of the functional body strength of the South Africa population (RSA-MIL-STD-127, 2001). Furthermore, functional strength data was used from activities that most closely resembled the movements of the exercise as well as the muscle groups used during such movement. Fifty percent of the one repetition maximum (1RM) functional strength for each anthropometric case was used, which can be considered a manageable

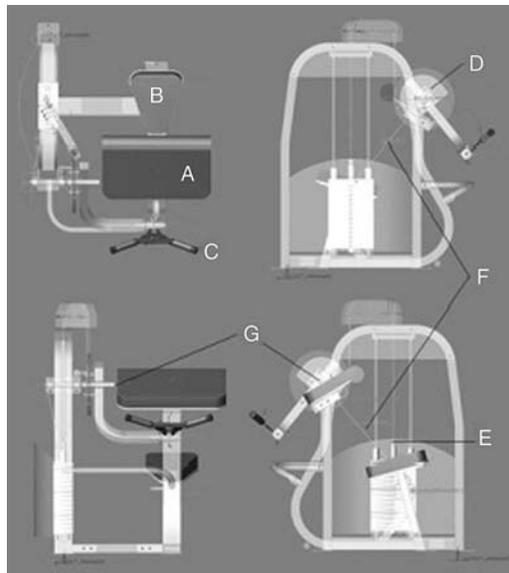


Figure 2. A top view (top left), side view from the right (top right), side view from the left (bottom right) and front view (bottom left) of the exercise machine. Descriptions for the labelled parts are as follows: A = preacher curl “platform” (non-adjustable), B = adjustable seat, C = handle bars, D = circular cam, E = translational joint created in order to simulate the lifting of the weights, F = coupler joint created in order to link the translational movement of the weights and the rotational movement of the lever arm of the apparatus, G = centre of rotation for the lever arm, which should also serve as a guideline for placement of the elbow joint centre.



resistance to perform an exercise with appropriate form and technique for two repetitions (Table I).

Simulation

Extreme care was taken with the positioning of the 3D musculoskeletal model onto the CAD model of the seated biceps curl machine to ensure proper technique, posture and positioning according to best exercise principles. The engineered adjustability of the exercise machine was used in order to ensure correct positioning for each of the anthropometric cases. Bushings were used to secure the arms at the left and right humerus, as well as the upper torso at the sternum to the preacher curl “platform” and spherical joints were used to connect the hands to the handle bars of the biceps curl machine (Figure 2). Bushings were also used in order to secure the lower torso to the seat of the exercise machine. Bushing elements were preferred to fixed joint elements because they allow for limited translational and rotational motion. Also, the amount of motion can be controlled by changing stiffness and damping characteristics in all three orthogonal directions.

The inverse dynamics–forward dynamics method was applied during the simulations. Inverse dynamics simulations are performed on models which are being manipulated by the use of motion agents or motion splines. During the inverse dynamics simulation, a rotational motion was applied to the revolute joint of the lever arm attached to the handle bars of the biceps curl machine in order to generate the required movement of the resistance training machine. This movement replicated the pulling (concentric) and resisting (eccentric) phase of the exercise. The time for the concentric phase was set at 1.41 s and the eccentric phase slightly longer at 2.84 s to mimic conventional resistance training technique in which the downward phase is more deliberate to prohibit the use of momentum. The 1.41 s concentric phase included a STEP function approximation over 0.5 s to ensure a gradual start to the movement. The muscles of the model were “trained” during the inverse dynamics simulation in order to calculate the changes in muscle lengths that resulted from the prescribed machine movement. The movement replicated two repetitions of the exercise separated by a slight pause between repetitions.

After the inverse dynamics simulation was performed, the rotational motion was removed from the rotational joint of the lever arm of the seated biceps curl machine. The recorded muscle length changes and resulting joint movements were then used to drive the model during the forward dynamics simulation. During the forward dynamics simulation the model is driven by the internal forces (muscle length changes resulting in joint angles and torques) and influenced by external forces (gravity, contact and determined exercise resistance). It is important to note that changes had to be made to the LifeModeler™ default model in order to solve the models with plausible kinematics during the forward dynamics simulations. The changes included: 1) increased the physiological cross-sectional area (pCSA) of the three default elbow flexor muscles, 2) manipulated the muscle origins and insertion locations and 3) decreased the joint stiffness in the forward dynamics simulations. The details of these changes are covered in the Discussion. All results presented are derived from the forward dynamics simulations after these changes to the default model were made.

Data analysis

The anthropometric dimensions and exercise postures of the musculoskeletal human models were visually assessed in relation to the dimensions and adjustability of the resistance training equipment in order to determine if all three anthropometric cases representative of the full



spectrum of the South African end-user population could comfortably be accommodated on the seated biceps curl resistance training machine. Key aspects included start and end exercise posture as well as maintaining correct technique throughout the exercise during simulations. Start and end exercise posture evaluation entailed positioning of the axilla on the top of the preacher curl “platform” as to support the back of the upper arms, alignment of the elbow joint with the axis of rotation of the machine, hip flexion of 80–90° and a knee angle of approximately 90–100°. The feet should be positioned flat on the ground. Correct technique was assessed in terms of limited compensatory movements and performing the biceps curl through the full range of motion as determined by the inverse dynamics.

Peak muscular force production of the prime movers was analysed to determine exercise efficacy of the seated biceps curl. For the purpose of this study, efficacy of the equipment was assessed by evaluating whether the equipment exercised the muscles it was designed for, i.e. does the biceps curl machine exercise the prime flexors of the elbow joint? Furthermore, the risk of injury to the musculoskeletal system of the exerciser was ascertained by comparison of measured forces with safe loading limits for joints of the lumbar and thoracic spine (since no loading limits were found for the elbow joint) found in the literature as well as the peak muscular forces for the prime flexors of the elbow. Risk to both these structures are very real, especially while lifting excessive masses and/or exercising with poor postures.

The dynamic mode of analysis includes all the aspects of motion in the calculation of joint forces and internal stresses, including the effects introduced by changing velocity and acceleration components (Wagner et al., 2007). Different joint loading criteria were derived using biomechanical research taking into consideration the posture and anthropometry (Cooper & Ghassemieh, 2007). However, criteria for determining whether a particular task or exercise is “safe” based on tissue-level stresses or joint loading are available for only a small number of tissues and loading regimes (e.g. lower back motion segments in compression) (Wagner et al., 2007). Therefore for this study anterior/posterior (A/P) shear forces and joint compression forces were used as safety criteria.

The basic descriptive statistical analyses of the results were completed using the STATISTICA[®] software package (Statsoft).

Results

Muscle force production (N), muscle length (mm) and joint torque (Nm) are reported for the right side. Theoretically, the results of the left and right side should be similar although this could have been slightly influenced by the alignment of the seat and preacher curl “platform”.

Force production of the biceps brachii short head (BBS) and biceps brachii long head (BBL) and the brachialis (B) muscles are presented in Table II. The peak force production is the highest for the BBL in comparison to the BBS in all the anthropometric cases. The peak B muscle force production was less than either the BBS or BBL for all the anthropometric cases except for the 95th percentile male whose peak B muscle force production was equal to his BBS muscle force production. The 5th percentile female exerted the highest force for all muscles followed by the 50th percentile male and lastly the 95th percentile male.

Muscle length results for the BBS, BBL and B muscles are presented in Table II. The mean muscle length is greatest for the BBS in comparison with the BBL for all the anthropometric cases. Furthermore, the maximum, minimum and mean muscle lengths are smaller for the B muscle in comparison to both the heads of the BB muscle for all three anthropometric cases. The mean muscle length for all the muscles is greatest for the 95th percentile male and smallest for the 5th percentile female. The length of the BBL muscle was shortest at approximately 1.6 s and 5.6 s (Figure 3).

Table II. Right biceps brachii and brachialis muscles force production (N) and lengths (mm) results for the three anthropometric cases.

Musculoskeletal model	Muscle	Max (N)	Mean (mm)	Min (mm)	Max (mm)
5 th percentile female	Biceps brachii short head	268.9	239.2	228.9	253.9
	Biceps brachii long head	329.5	217.0	206.8	235.9
	Brachialis	215.1	105.6	103.5	112.0
50 th percentile male	Biceps brachii short head	221.5	300.6	281.1	315.8
	Biceps brachii long head	267.7	274.8	253.8	294.3
	Brachialis	172.6	131.9	122.6	142.5
95 th percentile male	Biceps brachii short head	172.3	330.5	307.5	349.5
	Biceps brachii long head	215.9	303.9	280.7	325.3
	Brachialis	172.3	143.3	129.8	156.5

Due to the involvement of wrist and elbow joints in the biceps curl exercise, torque for these joints (right side) are presented in Table III. The mean wrist torque is lower than the mean elbow torque for all three anthropometric cases. Furthermore, the torque values for both joints are lowest for the 5th percentile female and highest for the 95th percentile male. Maximum elbow joint torque production was produced at approximately 1.6 s and 5.6 in the three anthropometric cases (Figure 4 and 5).

Thoracic (T12/L1 intervertebral joint) and lumbar (L5/S1 intervertebral joint) spine compression and A/P shear forces are presented in Tables III and IV respectively. Peak thoracic spine joint compression forces were greatest for the 95th percentile male, followed by the 50th percentile male and were lowest in the 5th percentile female. There was a similar trend for the peak lumbar spine joint compression forces except that the 50th percentile male's compression force was slightly higher than the 95th percentile male's. In all anthropometric cases the peak lumbar spine joint compression forces were greater than the peak thoracic spine joint compression forces.

Peak A/P lumbar joint shear forces were greater than peak A/P thoracic joint shear forces for the three anthropometric cases. The 5th percentile female recorded the lowest peak A/P

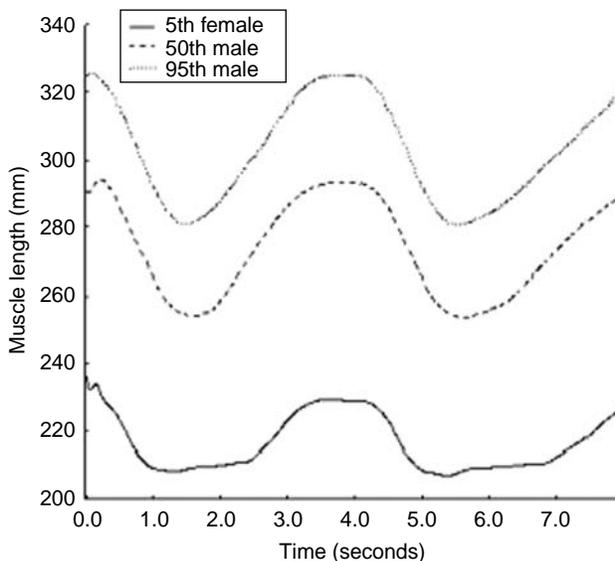


Figure 3. Long head of the biceps brachii muscle length (mm) for the three anthropometric cases.

Table III. Right wrist and elbow joint torque (Nm) (sagittal plane) and thoracic and lumbar spine joint compression force (N) results for the three anthropometric cases.

Musculoskeletal model	Joint	Mean (Nm)	Min (Nm)	Max (Nm)	Max (N)
5 th percentile female	Wrist	0.8	2.8	3.9	
	Elbow	3.7	-28.3	11.6	
	Thoracic spine				1774.1
	Lumbar spine				2337.2
50 th percentile male	Wrist	1.9	-4.2	3.7	
	Elbow	8.1	5.4	17.7	
	Thoracic spine				2123.3
	Lumbar spine				2920.5
95 th percentile male	Wrist	3.4	0.2	6.2	
	Elbow	12.6	1.8	25.3	
	Thoracic spine				2133.2
	Lumbar spine				2821.7

lumbar and thoracic joint shear forces, followed by the 50th percentile male and the 95th percentile male recorded the highest peak shear forces.

Discussion

The first conclusion that can be drawn from this study is that the LifeModeler™ default model was not adequate to solve the forward dynamics simulations for any of the anthropometric cases as the default model was not capable of generating large enough joint torques to perform the biceps curl. In order to solve this problem the following adjustments were made to the default model: 1) increased the pCSA of the three default elbow flexor muscles, 2) manipulated the muscle origins and insertion locations and 3) decreased the joint stiffness in the forward dynamics simulations. These adjustments were based on running various iterations in order to produce kinematics during the forward dynamics

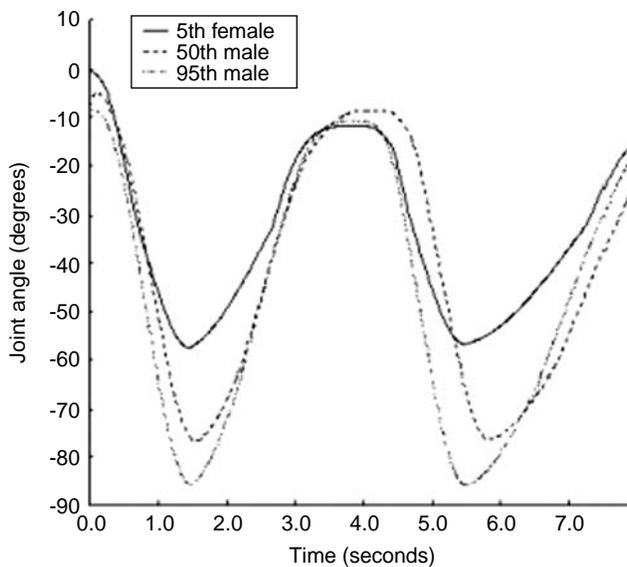


Figure 4. Sagittal elbow joint angle (°) for the three anthropometric cases.

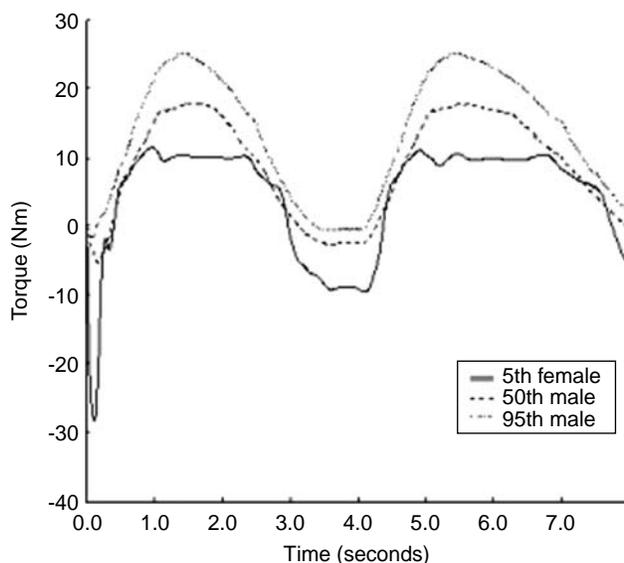


Figure 5. Elbow joint torque (Nmm) for the three anthropometric cases.

simulation that best matched that of the inverse dynamics simulation (when the model was driven by the external motion agents). Once accurate kinematics was obtained in the forward dynamics run, the kinetic results were evaluated in order to assess if they were reasonable.

Muscle tension depends on several factors including neural activation, pCSA, muscle architecture and muscle length (Durall, 2004). The pCSA of the BBL, BBS and B muscles had to be increased for all three anthropometric cases by 50% (Table V). It is interesting to note that the pCSA area for the 50th percentile male was larger than that of the 95th percentile male for both muscle groups. The apparent reasoning for this discrepancy according to the manufacturers of the software has to do with the proportionality of the volume differences between the two cases. The 95th percentile male is 146 mm taller but the increase in body mass was only 6 kg, approximately a 9% increase in height with only a 9% increase in volume. To keep proportionality, volume should increase three times more than stature. An additional point to consider is the significant variance in muscular strength between subjects of similar anthropometry due to differences in conditioning levels.

The muscle origin and insertion points of the BBS and BBL muscles also had to be manipulated in order to increase the moment arm, allowing greater torque to be produced around the elbow joint (Table VI). There is considerable variability in human anatomical structure, including the points at which tendons are attached to bone. An individual whose

Table IV. Thoracic and lumbar spine joint anterior/posterior (A/P) shear forces (N) for the three anthropometric cases.

Musculoskeletal model	Spinal joint	Max (N)
5 th percentile female	Thoracic spine	736.8
	Lumbar spine	906.0
50 th percentile male	Thoracic spine	901.0
	Lumbar spine	1109.0
95 th percentile male	Thoracic spine	974.3
	Lumbar spine	1180.7



Table V. Physiological cross-sectional area (pCSA) after adjustments (mm²) for the three anthropometric cases.

Musculoskeletal model	Biceps brachii short head	Biceps brachii long head	Brachialis
5 th percentile female	147.2	180.5	116.0
50 th percentile male	178.7	218.8	139.7
95 th percentile male	177.6	217.4	138.9

tendons are inserted on the bone farther from the joint centre should be able to lift heavier weights because of the longer moment arm (Beachle & Earle, 2008). Moment arms for muscles are generally quite small, usually of the order of several centimetres, and change with joint angle. The moment arm of the BB muscle is smallest at the extremes of the elbow joint range of motion and largest within the midrange. Because moment arm profiles of all flexor muscles are not identical, not all muscles will contribute similarly to the exercise (Reiser et al., 2007). The origin of the BBS muscle was relocated 50 mm superiorly and 10 mm medially from the default position, while the origin of the BBL muscle was relocated 10 mm superiorly and medially from the default position. Insertions of both the heads were moved 20 mm distally from the default position (Table VI). Considering that the literature suggests considerable individual variation in muscle origin and insertion locations (El-Naggar, 2001; Ramesh et al., 2007) the adjustments were deemed anatomically reasonable. It should be noted that these adjustments resulted in a longer muscle mean length of the BBS than the BBL muscle. While anatomically unusual, these adjustments were required to solve the models during the forward dynamics simulations.

Lastly, the joint stiffness was reduced in the forward dynamics simulation only. Joint stiffness during inverse dynamics (default model) simulations was artificially increased solely for the purpose of ensuring high quality kinematics. One could argue that this is a plausible adjustment as in reality healthy joints experience minimal joint stiffness therefore the joint stiffness was decreased by finite levels through various iterations until acceptable kinematics was achieved. Even after the adjustments the 5th percentile female and the 50th percentile male BBL muscle reached their maximum force production as can be seen in Figure 6. A possible reason for this could be that the biceps curl machine design does not accommodate the anthropometric dimensions of the 5th percentile female and the 50th percentile male as well as that of the 95th percentile male. A discrepancy with regards to the alignment of the elbow joint with the axis of rotation of the lever arm could result in a disproportionately higher relative muscle force production required to overcome the external resistance. This could result in the muscles reaching maximal force production for extended periods of time which is undesirable in terms of muscular injury risk.

Table VI. Right biceps brachii muscles lengths (mm) before and after the origin and insertion adaptations for the three anthropometric cases.

Musculoskeletal model	Muscle	Default model	After adaptation	Change
5th percentile female	Biceps brachii short head	209.4	249.7	40.3
	Biceps brachii long head	224.4	229.6	5.2
50th percentile male	Biceps brachii short head	282.7	315.1	32.4
	Biceps brachii long head	281.9	292.6	10.7
95th percentile male	Biceps brachii short head	314.4	338.5	24.1
	Biceps brachii long head	315.7	339.8	24.1

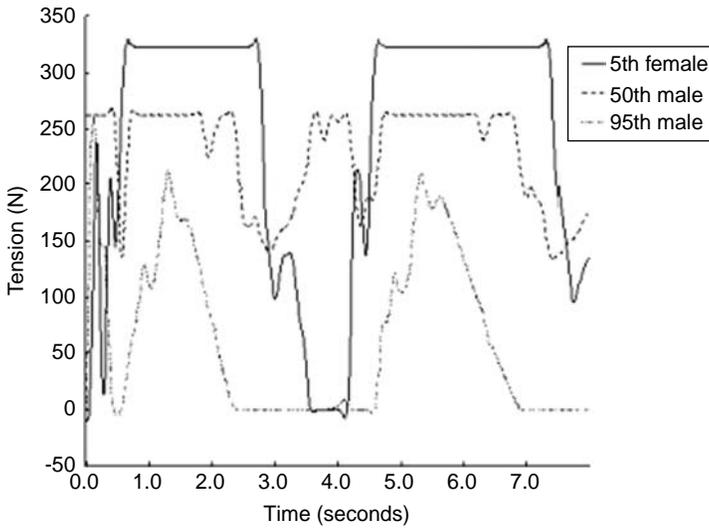


Figure 6. Biceps brachii long head force production (N) for the three anthropometric cases.

The second conclusion of this study is that the software is able to sufficiently highlight the anthropometric differences with regards to the biceps curl machine’s engineered or manufactured adjustability. The adjustability of the biceps curl machine accommodated all the anthropometric cases except for the 5th percentile female (Figure 7). The small female’s feet could not reach the ground and her elbow joint could not be aligned properly with the axis of rotation of the machine despite maximum adjustments to the seat. The commercially available machine does not allow for manual adjustability of the preacher curl “platform”. However the “platform” had to be adjusted within the modelling environment so that the

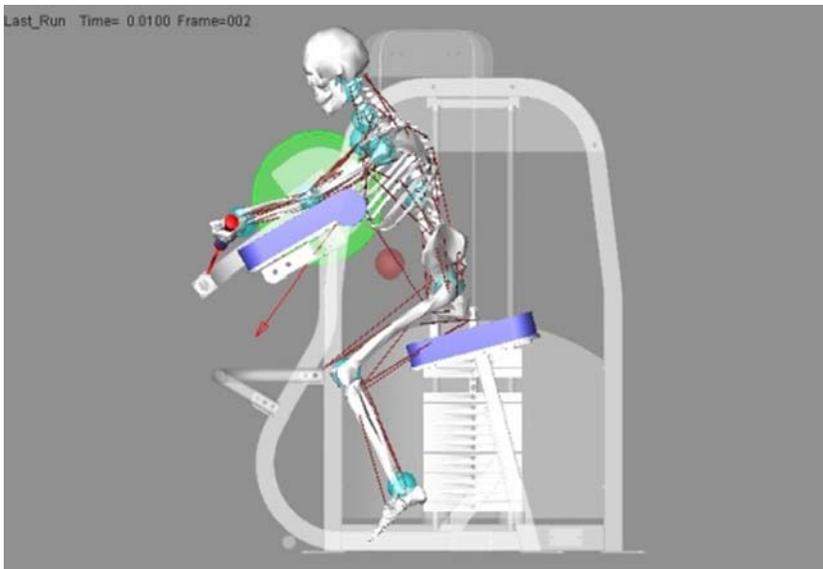


Figure 7. 5th percentile female’s positioning on the seated biceps curl machine.



small female could reach the handle bars of the biceps curl machine. These adjustments to the preacher curl “platform” would not be possible in reality and therefore should be an important design consideration for the manufacturer. As a result the exercise posture of the 5th percentile female was negatively affected. This deficiency in the adjustability of the equipment once again highlights the problem that not all equipment can be fitted to all individuals and anthropometry differences should be taken into consideration when designing exercise equipment (Hamilton et al., 2009). Furthermore, if an individual is not accommodated appropriately on a piece of equipment exercise technique and posture can be negatively influenced. It was also noted when positioning the musculoskeletal models that the preacher curl “platform” was not perpendicular with the seat of the biceps curl machine. The fact that the misalignment of the seat and preacher curl “platform” was obvious during the modelling process indicates that this method is effective in highlighting such design flaws.

Lastly, with regards to the biomechanical evaluation in terms of exercise efficacy and injury risk, the following could be deduced from the study. The force production was greater for the BBS and BBL in comparison with the B muscle. This result is to be expected as the BB is the prime mover of the biceps curl exercise and is also a larger muscle than the B. It appears as if the relevant muscle groups are being exercised during the seated biceps curl exercise, but in order to successfully evaluate the efficacy of the exercise in more detail, all the relevant muscles should be present on the model and it would also be useful to compare similar exercises in terms of peak muscle force production of prime movers. Furthermore, the 5th percentile female’s force production for all studied muscles was the greatest in comparison with the other anthropometric cases. A possible explanation for these results is that anatomical differences could result in greater force production required by the small female in order to overcome the external resistance. A shorter lever arm (even though the resistance used for each case was proportional to the anthropometric dimensions) as well as poor accommodation resulting in poor alignment could result in unexpectedly high muscle force produced by the female model.

The joint torque values obtained for the wrist and elbow appear to be plausible, as they fall well below peak values obtained by means of isokinetic testing. For example wrist flexion/extension values of 13.8 Nm and 12.7 Nm respectively at 60°/s in non-disabled subjects (Van Swearingen, 1983) and elbow flexion/extension values of 36 Nm for both elbow flexion and extension at 60°/s in female college basketball players (Berg et al., 1985).

Muscles can produce maximum tension at or near their resting length because the greatest numbers of actin and myosin bonds are formed when the muscles are at this length. The resting position of the BB would theoretically occur when the elbow is bent roughly 75° because the total arc of movement at the elbow is roughly 150°. Thus, at 75° of elbow flexion, the BB is midway between fully elongated and fully shortened (Durall, 2004). In this study, the maximum joint elbow torques were reached at joint angles between approximately 55° (5th percentile female) and 85° (95th percentile male) (Figure 4). This corresponds favourably with the literature’s proposal of 75°. The maximum elbow torque production for all three anthropometric cases was at approximately 1.6 s and 5.6 s (Figure 4) which appears to correspond with the shortest BBL contraction (Figure 3). Although these results may appear contradictory, it must be noted that the shortest muscle length reached during the exercise period was indeed very close to the natural resting length of the BB muscles, to be distinguished from the shortest anatomical length of the muscle during the full range of motion of the joint.

There are three load types: compression, tension, and shear. Tensile loads tend to pull the ends of a body apart, compressive loads tend to push the ends together, and shear loads tend to produce horizontal, or parallel, sliding of one layer over another (Whiting & Zernicke,



2008). For risk assessment of musculoskeletal injury it was important to evaluate the compression and A/P shear forces of the thoracic and lumbar spine, as the back is a common area for injury during exercise. In addition there is research regarding the maximum recommended limits when performing various tasks thus making comparisons between recorded values and recommended limits possible. It is important to bear in mind that the spine of the default model does not consist of all the individual vertebrae but rather of various segments that represent the different regions of the vertebral column with joints between these segments. A model with individualised vertebra and corresponding joints might produce different results.

Previous research from the American National Institute for Occupational Safety and Health (NIOSH) recommends that spinal compression forces should not exceed 3.4 kN to avoid injury. However there is a very real threat of musculoskeletal injury before this failure limit value has been reached (Snook & Ciriello, 1991; Cooper & Ghassemieh, 2007; Knapik & Marras, 2009). British standards (BS EN 1005–3, 2002) recommend 600 N as the cut-off point for carrying masses, and no further recommendations other than “time of exposure needs to be minimised” and “a preferred system requires optimal ergonomic position with reduced back bending posture” are made. All three anthropometric cases were below the recommended failure limit of 3.4 kN but were above 600 N and therefore could still be putting them at risk for injury.

The thoracic spine joint A/P shear forces for the three anthropometric cases are below the most commonly cited spine tolerance of 1000 N for shear force as stipulated by McGill (1996). However this was not the case for the lumbar spine joint A/P shear forces. The male anthropometric cases were both above 1000 N and the 5th percentile female was slightly below.

Although the compression (thoracic and lumbar spine) and thoracic spine joint A/P shear forces recorded were within the acceptable limits, the modelling does not take into account the repetitive nature and accumulative effect of exercise. Furthermore, the resistance used was only 50% of each of the anthropometric cases’ estimated 1RM so if exercisers use a resistance closer to their maximum the loading values may exceed the acceptable limits. The modelling also does not consider varying training status or muscular strength and endurance of individuals which could affect the individual’s risk for injury. Core musculature, which plays an important role in reducing the joint loading on the spine, is also not taken into account. The core can be defined as the lumbo-pelvic-hip complex. The core is where the centre of gravity is located and where all movement begins (Prentice, 2010a). The core operates as an integrated functional unit whereby the entire kinetic chain works synergistically to produce force, reduce force, and dynamically stabilize against abnormal force. In an efficient state, each structural component distributes weight, absorbs force, and transfers ground reaction forces (Prentice, 2010b). While limited data exists on safe muscle tension values due to large individual variability, the results of the muscle tensions for the 5th percentile female and 50th percentile male indicate that one of the prime movers of the elbow was strained above its maximum capacity for extended periods during the exercise. This should be deemed to be a high risk for muscular injury during the exercise.

Conclusion

The 3D musculoskeletal modelling was able to highlight some interesting design elements and flaws, as well as biomechanical and anthropometrical limitations of the evaluated seated biceps curl resistance training machine. It has therefore once again been demonstrated that the anthropometric dimensions of the end-user must be taken into account when designing



exercise equipment. High recorded lumbar spine A/P shear forces for the three anthropometric cases indicate that the seated biceps curl exercise may pose a risk for low back injuries. Extended periods of maximal muscle tension in both the 5th percentile female and 50th percentile male indicate that the seated biceps curl exercise may pose a risk for elbow flexor injuries. However, the unfavourable positioning of the small female did not appear to put her at increased risk for injury in comparison to the other two anthropometric cases. The LifeModeler™ default model consisted only of the BB and B muscles. However, other muscles also play an important role in elbow flexion such as the brachioradialis muscle. To truly evaluate exercise efficacy all the important muscles that play a role in the movement should be present. It is possible to add muscles to the default model and then assess their relative contribution to the produced force (as a percentage of their maximal force generating capacity) however this can be time consuming and was not within the scope of this study. In addition, comparisons should be made between variations in technique as well as different exercises for the same muscle groups or different manufacturer's equipment for the same exercise in order to make an informed evaluation of the piece of equipment.

3D musculoskeletal modelling can certainly be used to evaluate resistance training equipment design, but the limitations discussed in this study must be taken into consideration, especially when using default models lacking adequate bio-fidelity. Mathematical and computer modelling are continually being improved and thus the limitations will hopefully be addressed, making the process of 3D musculoskeletal modelling more user-friendly and effective in evaluating various types of equipment and thus ensuring the safety and efficacy of the exercise for the end-user. Unfortunately, currently it is still a fairly time consuming procedure requiring a process of many iterations in order to perform the modelling and provide plausible results. However an important benefit of 3D musculoskeletal modelling that should not be forgotten is the fact that it is a relatively inexpensive manner of evaluating resistance training equipment design and can be performed without putting the subject at risk of injury.

References

- Agnesina, G., Taiar, R., Havel, N., Guelton, K., Hellard, P., & Toshev, Y. (2006, June). *BRG.LifeMOD™ modeling and simulation of swimmers impulse during a grab start*. Paper presented at the 9th Symposium on 3D Analysis of Human Movement, Valenciennes, France.
- Alexander, R.McN. (2003). Modelling approaches in biomechanics. *Philosophical Transactions of the Royal Society*, 358, 1429–1435.
- Annegarn, J., Rasmussen, J., Savelberg, H. H. C. M., Verdijk, L. B., & Meijer, K. (2007, May). *Strength scaling in human musculoskeletal models*. Paper presented at the European Workshop on Movement Sciences, Amsterdam, Netherlands.
- Beachle, T. R., & Earle, R. W. (2008). *Essentials of strength training and conditioning*. Champaign, IL: Human Kinetics.
- Berg, K., Blank, D., & Muller, M. (1985). Muscular fitness profile of female college basketball players. *Journal of Orthopaedic and Sports Physical Therapy*, 7, 59–64.
- Biomechanics Research Group, Inc. (2006). *LifeMOD biomechanics modeler manual*. San Clemente, USA: Life Modeler.
- Bredenkamp, K. (2007). *The characterisation of the male and female body forms of the SANDF*. ERGOTECH Document P0683/2007/01. Centurion: ERGOnomics TECHNOlogies.
- BS EN 1005–3: 2002. *Safety of machinery–Human physical performance–Part 3: Recommended force limits for machinery operations*. London: British Standards Institute.
- Cooper, G., & Ghassemieh, E. (2007). Risk Assessment of patient handling with ambulance stretcher systems (ramp / winch), easy-loader, tail-lift using biomechanical failure criteria. *Medical Engineering & Physics*, 29, 775–787.
- Dabnichki, P. (1998). Biomechanical testing and sport equipment design. *Sports Engineering*, 1, 93–105.
- De Jongh, C. (2007). *Critical evaluation of predictive modelling of a cervical disc design*. Unpublished masters thesis, University of Stellenbosch, South Africa.



- Durall, C. (2004). Injury risk with the horizontal arm curl: Biomechanical and physiological considerations. *National Strength and Conditioning Association*, 26, 52–55.
- El-Naggar, M. M. (2001). A study on the morphology of the coracobrachialis muscle and its relationship with the musculocutaneous nerve. *Folia Morphology*, 60, 217–224.
- Floyd, R. T. (2009). *Manual of structural kinesiology*. New York, NY: McGraw-Hill.
- Gordon, C. C., & Brantley, J. D. (1997, December). *Statistical modelling of population variation in the head and face*. Paper presented at the design and integration of helmet systems International Symposium, Massachusetts, USA.
- Hamilton, N., Weimar, W., & Luttgens, K. (2009). *Kinesiology: Scientific basis of human motion*. New York, NY: McGraw-Hill.
- Hofmann, M., Danhard, M., Betzler, N., Witte, K., & Edelmann, J. (2006). Modelling with BRG.lifeMOD™ in sport science. *International Journal of Computer Science in Sport*, 5, 68–71.
- Kazlauskienė, K. (2006). *Design and research of biomechanical models of human with joint replacements*. Unpublished doctoral thesis, Kaunas University of Technology, Lithuania.
- Kenny, I. C., Wallace, E. S., Brown, D., & Otto, S. R. (2005). *Validation of a full-body computer simulation of the golf drive for clubs of differing length*. University of Ulster: R & A Limited.
- Knapik, G. G., & Marras, W. S. (2009). Spine loading at different lumbar levels during pushing and pulling. *Ergonomics*, 52, 60–70.
- McGill, S. M. (1996, June). *Searching for the safe biomechanical envelope for maintaining healthy tissue*, Paper presented at the pre-meeting workshop of the International Society for the Study of the Lumbar Spine: The contribution of biomechanics to the prevention and treatment of low back pain, Vermont, USA.
- Olesen, C. G., Andersen, M. S., Rathleff, M. S., de Zee, M., & Rasmussen, J. (2009, June). *Understanding the biomechanics of medial tibial stress syndrome – A simulation study using a musculoskeletal model*. Paper presented at the meeting of the International Society of Biomechanics, Cape Town, South Africa.
- Oliveira, L. F., Matta, T. T., Alves, D. S., Garcia, M. A. C., & Vierra, T. M. M. (2009). Effect of the shoulder position on the biceps brachii EMG in different dumbbell curls. *Journal of Sports Science and Medicine*, 8, 24–29.
- Prentice, W. E. (2010a). *Rehabilitation techniques for sports medicine and athletic training*. New York, NY: McGraw-Hill.
- Prentice, W. E. (2010b). *Essentials of athletic injury management*. New York, NY: McGraw-Hill.
- Ramesh, R. T., Vishnumaya, G., Prakashchandra, S. K., & Suresh, R. (2007). Variations in the origin of sternocleidomastoid muscle. *International Journal of Morphology*, 25, 621–623.
- Rasmussen, J., de Zee, M., Damsgaard, M., Christensen, S. T., Marek, C., & Siebertz, K. (2005, July). *A general method for scaling musculo-skeletal models*. Paper presented at the International Symposium on Computer Simulation in Biomechanics, Cleveland, Ohio.
- Reiser, R. F., Mackey, D. T., & Overman, J. W. (2007). Between the beginning and end of a repetition: How intrinsic and extrinsic factors influence the intensity of a biceps curl. *National Strength and Conditioning Association*, 29, 64–76.
- Rietdyk, S., & Patla, A. E. (1999). Context-dependent reflex control: Some insights into the role of balance. *Experimental Brain Research*, 119, 251–259.
- RSA-MIL-STD-127. (2001). *Ergonomic design: Biomechanics-specific functional body strength data standard*, RMSS Document, 5, 1–28. Pretoria, RSA: RMSS.
- RSA-MIL-STD-127. (2004). *Ergonomic design: Anthropometry and environment*. RMSS Document, 1, 1–196. Pretoria, RSA: RMSS.
- Schillings, A. M., Van Wezel, B. M., & Duysens, J. (1996). Mechanically induced stumbling during human treadmill walking. *Journal of Neuroscience Methods*, 67, 11–17.
- Snook, S. H., & Ciriello, V. M. (1991). The design of manual handling tasks: Revised tables of maximum acceptable weights and forces. *Ergonomics*, 34, 1197–1213.
- Van Swearingen, J. M. (1983). Measuring wrist muscle strength. *Journal of Orthopaedic and Sports Physical Therapy*, 4, 217–228.
- Wagner, D., Rasmussen, J., & Reed, M. (2007, June). *Assessing the importance of motion dynamics for ergonomic analysis of manual materials handling tasks using the AnyBody modelling system*. Paper presented at the meeting of the Digital Human Modelling for Design and Engineering Conference, Seattle, Washington.
- Whiting, W. C., & Zernicke, R. F. (2008). *Biomechanics of Musculoskeletal Injury*. Champaign, IL: Human Kinetics.